



# Sconce Elite Standard



## Description

The LITELUME™ Sconce Elite Standard (LL-SES) features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic shade for an elegant soft appearance.

Applications: commercial, residential, hospitality, entertainment and Hallways lighting.

## Fixture Information

Size:	15W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	90
Power Factor:	.98
THD:	<10%
Dimming:	120V Triac Dimming Type (Min. Dimming Level 3%)
Voltage:	Standard: 120V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

1000 lm

### Lumens Per Watt (typical):

66 lm/W

### CCT:

3000K

### Lifespan:

60,000 hrs

## Ratings & Certificates

ETL/cETL Listed

CEC Listed

JA8

JA10 Flicker Free


Damp Location Listed





## Dimension

Item	Width	Depth	Height
LL-SES	7.2"	4"	10"

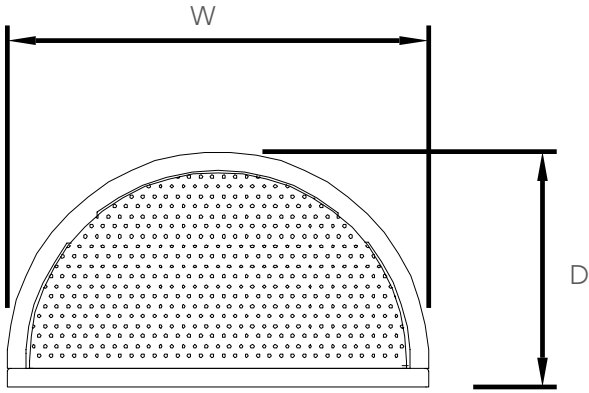



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

<b>Part #</b>	<b>Wattage</b>	<b>Lumens</b>	<b>Kelvin</b>	<b>Voltage</b>	<b>Color</b>
LL-SEP-15-30-SN	15	1000	3000	120V	Satin Nickel
LL-SEP-15-30-ORB	15	1000	3000	120V	Oil Rubbed Bronze