



Round Puff Drum



Description

The LITELUME™ LED Round Puff Drum (LL-RPD) luminaire incorporates a low profile design. Features a die-formed cold rolled steel housing in white finish with a high transmission acrylic lens for a soft appearance. Offering 2 different sizes and wattages with multiple color temperature options, high power factor and low THD. Select models come in MCT (multiple color temperature 3000k/35000k/4000k) Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	17W/24W/35W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: White (WH)
Mounting:	Standard: Ceiling Mount
Lens:	High Transmission Acrylic
CRI:	80
Power Factor:	.95
THD:	<20%
Voltage:	Standard: 120V, 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1600 to 3280 lm

Lumens Per Watt (typical):

94 to 106 lm/W

CCT:

3000K

3500K

4000K

MCT 3000K/3500K/4000K SELECTABLE

Ratings & Certificates

ETL/cETL Listed


Damp Location Listed





Dimension

Item	Diameter	Height
17W	11"	4.7"
24W	14"	4.9"
35W	18.9"	4.9"

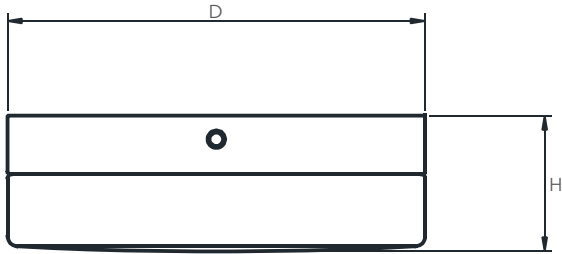



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-RPD-17-30-120-WH	17	1600	3000	120
LL-RPD-24-30-UNV-WH	24	2560	3000	120-277
LL-RPD-24-35-UNV-WH	24	2560	3500	120-277
LL-RPD-24-40-UNV-WH	24	2560	4000	120-277
LL-RPD-24-3CCT-UNV-WH	24	2560	3000K/3500K/4000K	120-277
LL-RPD-35-30-UNV-WH	35	3280	3000	120-277
LL-RPD-35-35-UNV-WH	35	3280	3500	120-277
LL-RPD-35-40-UNV-WH	35	3280	4000	120-277
LL-RPD-35-3CCT-UNV-WH	35	3280	3000K/3500K/4000K	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories

Part #	Description
EM	Emergency Battery Back Up
BI	High Frequency Sensor Bi-Level