



Pendant Series A



LL-PSA

Pendant Series A

The LITELUME™ Pendant Series A (LL-PSA) features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with an opal glass shade for an elegant soft appearance.



PERFORMANCE DATA

Lumen Output	800 - 2400 lm
Lumens Per Watt (typical)	89 lm/W
CCT	3000K 4000K
Lifespan	30,000 hrs

RATINGS & CERTIFICATES


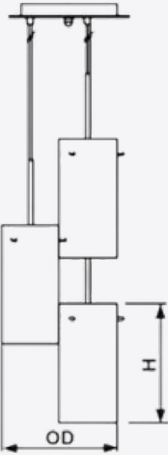
Energy Star • cULus Listed

APPLICATIONS

Dining • Vanity • Bathrooms • Hospitals
Schools • Restaurants • Offices • Hallways
Commercial, Residential & Hospitality

FIXTURE INFORMATION

Size	Housing	Shade	Lamp	Mounting	Color	
9W - 27W	Die-Formed Cold-Rolled Steel	Opal Glass	Omni Directional Dimmable E26 LED Bulb	Ceiling	<ul style="list-style-type: none"> Black Satin Nickel Oil Rubbed Bronze 	
Voltage	Dimming Range	Dimming Protocol	PF	THD	CRI	Warranty
120V	1%	Triac (Leading Edge)	.98	<10%	80	10 Year

DIMENSIONS	
1 Lamp	3 Lamp
 <p>(OD x H x H1) 3.5" x 8.5" x 6.0'</p>	 <p>(OD x H x H1) 3.5" x 8.5" x 6.0'</p>
Note: H1- Hanging Cable Length	Note: H1- Hanging Cable Length



Pendant Series A

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Lamps	
LL LITELUME	PSA Pendant Series A	1 1 Lamp 3 3 Lamp	
Watts	CCT	Voltage	Color
9 9W 27 27W	40 4000K 30 3000K	120 120V	SN Satin Nickel ORB Oil Rubbed Bronze BK Black

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-PSA-1-9-40-120-SN	9	800	4000	120
LL-PSA-1-9-40-120-BK	9	800	4000	120
LL-PSA-1-9-40-120-ORB	9	800	4000	120
LL-PSA-1-9-30-120-SN	9	800	3000	120
LL-PSA-1-9-30-120-BK	9	800	3000	120
LL-PSA-1-9-30-120-ORB	9	800	3000	120
LL-PSA-3-27-40-120-SN	27	2400	4000	120
LL-PSA-3-27-40-120-BK	27	2400	4000	120
LL-PSA-3-27-40-120-ORB	27	2400	4000	120
LL-PSA-3-27-30-120-SN	27	2400	3000	120
LL-PSA-3-27-30-120-BK	27	2400	3000	120
LL-PSA-3-27-30-120-ORB	27	2400	3000	120