



Sconce Thin Flat



Description

The LITELUME™ Sconce Thin Flat (LL-STF) luminaire incorporates a thin flat design. Features a die-formed cold rolled steel housing in satin nickel, optional oil rubbed bronze, with a high transmission acrylic lens. Offering a standard model in MCT (multiple color temperature 3000k/35000k/4000k), high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	15W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	Frosted Glass
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1300 lm

Lumens Per Watt (typical):

87 lm/W

CCT:

MCT 3000K/3500K/4000K SELECTABLE

Ratings & Certificates


ETL/cETL Listed
Damp Location Listed





Dimension

Item	Width	Depth	Height
15W	5.0"	3.8"	16.0"

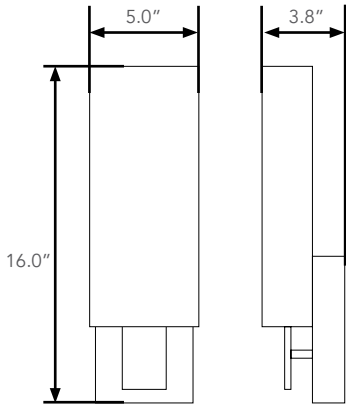



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-STF-15-MCT-UNV-SN	15	1300	3000K/3500K/4000K	120-277V	Satin Nickel
LL-STF-15-MCT-UNV-ORB	15	1300	3000K/3500K/4000K	120-277V	Oil Rubbed Bronze