



Description

Compact Wet Location Polycarbonate Exit Sign

Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing:

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- EZ snap-out Chevron directional indicators.
- Knockouts provided for conduit feed applications.

Options


- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- Custom: Signs available with requested 'special' wording.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.



Dimensions:

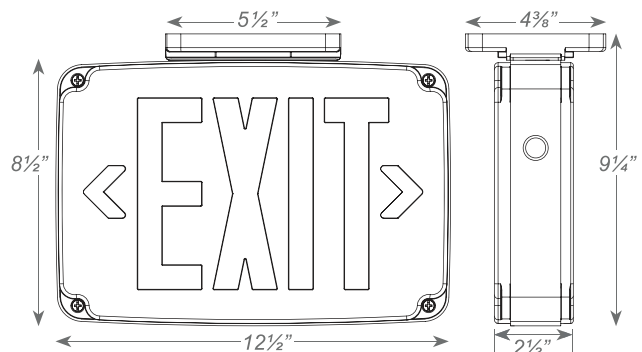



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Housing Color		Battery		Options	
LL-WLEZXTEU	1	Single Face	R	Red	W	White (with white faceplate)	(blank) EM-CW	AC-Only Battery Backup (Cold Weather Standard)	SDT 2C TP CUSTOM	Self-Diagnostics ¹ Dual Circuit Operation ² Tamper-Proof Custom Wording
	2	Double Face	G	Green	B G	Black (with black faceplate) Gray (with white faceplate)				

¹ Available only with EM units.

² Available only with AC units.