



Description

Wet Location Polycarbonate Exit Sign

Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Mounting hardware provided for back surface wall mount.

Housing:

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

Options:


- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (10°C – 40°C).
- Certified to CEC under Title 20 Regulations.



Dimensions:

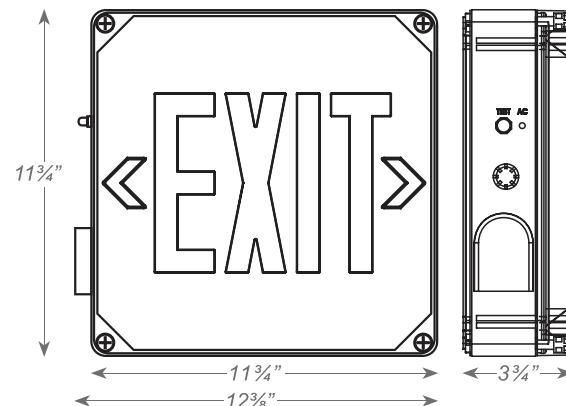



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter Color		Battery		Options	
LL-WLXTE	(blank)	Single Face (standard)	R G	Red Green	(blank) EM	AC-Only Battery Backup	HTR USA	Internal Heater ¹ Assembled in USA

¹Available only with EM units.