



LL-CAXTEU



Description

Chicago Approved Steel Exit/Stair Sign

Illumination:

Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.

Electrical:

- Universal 120V - 277V voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Mounting canopy included for top or end mount.
- Universal knockout pattern on backplate for wall mount.

Housing:


- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.



Dimensions:

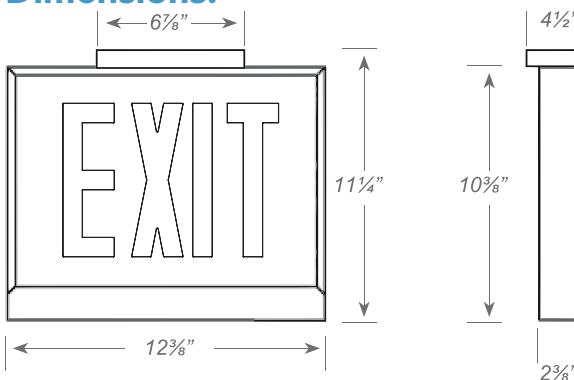



Project Name							
Catalog #							
Job Type							
Prepared By							
Notes							

Fixture Ordering Information

Model	No. of Faces	Letter		Housing		Battery		Options		
LL-CAXTEU	1 2	Single Face Universal Single/ Double Face	R	Red on White	W B	White Black	(blank) EM	AC-Only Battery Backup	-NA -SNA -DA -S-DA -RA ¹ -S-RA ¹ -LA ¹ -S-LA ¹ -LAR ² -S-LARA ²	Exit No Arrow Stairs No Arrow Exit Double Arrow Stair Double Arrow Exit Right Arrow Stair Right Arrow Exit Left Arrow Stair Left Arrow Exit Left/Right Arrow Stair Left/Right Arrow

¹ Available in single face configuration only.

² Available in double face configuration only.