




Description

The LITELUME™ Junction Box Family (LL-JB) features a IP66 rated copper free aluminum enclosure for general wiring in hazardous locations. Typical lighting applications include industrial facilities, marine vessels, mining, chemical production & processing, oil & gas refineries and high humidity, dust and temperature facilities


Feature

Rated Voltage:	Max 800VAC
Rated Current:	24A, 32A, 41A
Ambient Temperature	-60°C to +60°C (-76°F to +140°F)
Certification	Class I, Division 1, Groups C and D Class I, Division 2, Groups A, B, C and D Class II, Division 1, Groups E, F and G Class II, Division 2, Groups F and G Class III

WMA25JB

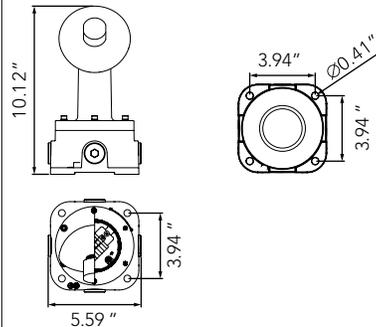



WMA90JB

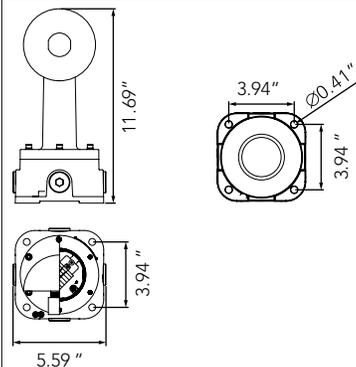

Model	Terminal Specs	Number of Terminal Blocks	Cable Entry Specs	Cable Entry Amount
WMA25JB	2.5mm ² /24A	Max. 4	1/2" NPT /M20x1.5	Max. 4
WMA90JB	2.5mm ² /24A, 4mm ² /27A		3/4" NPT /M25x1.5	



JB



Model	Terminal Specs	Number of Terminal Blocks	Cable Entry Specs	Cable Entry Amount
JB	2.5mm ² /24A	Max. 4	1/2" NPT /M20x1.5	Max. 5
	2.5mm ² /24A, 4mm ² /27A		3/4" NPT /M25x1.5	



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Information

Part #	Wattage
WMA90JB	Wall Mount Arm 90° Junction Box
WMA25JB	Wall Mount Arm 25° Junction Box
JB	Junction Box