



## Description

Red/Green Field Selectable Compact Thermoplastic Exit Sign

## Illumination:

- Ultra bright, energy efficient, long life Red or Green LEDs.

## Electrical:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting:

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## Housing:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

## Options


- 2C-120V/2C-277V: Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

## Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



## Dimensions:

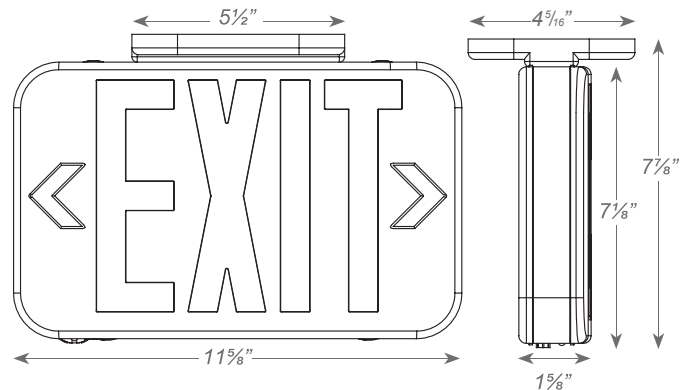



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Model	No. of Faces	Letter Color	Housing Color	Battery	Options
LL-EZRXTEU	2 Universal Single/ Double Face	R/G Red/ Green <sup>1</sup>	W B White Black	(blank) EM AC-Only Battery Backup	USA 2C-120 2C-277 Assembled In USA Dual Circuit with 120 input <sup>2</sup> Dual Circuit with 277 input <sup>2</sup>

<sup>1</sup>Field Selectable

<sup>2</sup>Available only with AC units.

## Electrical Information

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LL-EZRXTEU-RED/GREEN EM	1.0	1.0	0.1	0.1