



Post Top Round Premium Large



LL-PTRPL

Post Top Round Premium Large

The LITELUME™ Post Top Round Premium Large (LL-PTRPL) combines style and performance with its seamless appearance. Featuring a die-cast aluminum housing with outstanding corrosion protection. Round and smooth in design with soft light. Suitable for mounting heights of 8-25'.



PERFORMANCE DATA

Lumen Output	5512 - 19500 lm
Lumens Per Watt (typical)	123 lm/W
CCT - Field Selectable	3000K 4000K 5000K
Lifespan	Features Ultra Efficient Driver with up to 100,000 running hours

RATINGS & CERTIFICATES

UL & cULus for Wet Location
3G Vibration Rated • IP65

APPLICATIONS

Pathway • Walkway • Municipality
General Lighting Applications

FIXTURE INFORMATION

Size	Housing	Finish	Lens	Mounting			Color	Distribution
45W - 160W	Die-Cast Aluminum	Protective Powder Coat	UV Polycarbonate	Tenon fits 2 3/8" - 3" Standard OD			Standard: Bronze with Color Options	Type 5
Voltage		Dimming	Electrical	PF	THD	CRI	Controls	Warranty
Standard: 120-277V Optional: 480V		Standard: 0-10V 100% - 10%	10kV Surge Protection	.90	<20%	80	Photocell with On/Off Dip-Switch Included	10 Year Limited

Operating Temperature: -40°F to 140°F





Post Top Round Premium Large

SPECIFICATION


Model	Nominal Watts	Lumen *	Efficacy *
LL-PTRPL	45W / 60W / 80W	9567 lm *	121.24 lm/W *
	100W / 125W / 160W	19220 lm *	121 lm/W *

* Lumen and Efficacy are based on the highest wattage at 5000K

DIMENSIONS

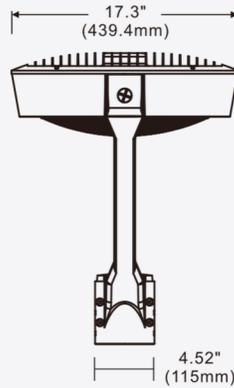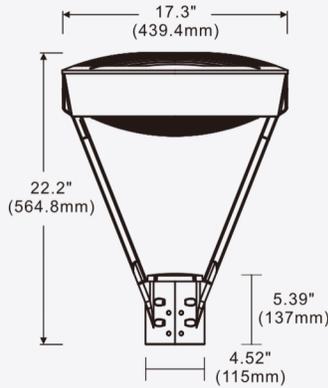

Line Drawing





Post Top Round Premium Large

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Lumen Package	Voltage	CCT
LL LITELUME	PTRPL Post Top Round Premium Large	10L 9800 Lumens 19L 19500 Lumens	UNV 120-277V 480 480V	SCT Selectable Color Temperature
Power	Distribution	Finish	Photocell	Accessories
SP Selectable Power	T5 Type 5	BZ Bronze BK Black WH White GY Gray DGR Dark Green CUS Custom	PC Photocell with On/Off Dip Switch	OS Occupancy Sensor with Dimming PTRPHSSBZ House Side Shield PTRPL Bronze PTRPHSSBK House Side Shield PTRPL Black

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage	Distribution
LL-PTRPL-10L-UNV-SCT-SP-T5-BZ-PC	45W/60W/80W	5512/7350/9800	3000K/4000K/5000K	120-277V	Type 5
LL-PTRPL-19L-UNV-SCT-SP-T5-BZ-PC	100W/125W/160W	12200/15250/19500	3000K/4000K/5000K	120-277V	Type 5
LL-PTRPL-10L-UNV-SCT-SP-T5-BK-PC	45W/60W/80W	5512/7350/9800	3000K/4000K/5000K	120-277V	Type 5
LL-PTRPL-19L-UNV-SCT-SP-T5-BK-PC	100W/125W/160W	12200/15250/19500	3000K/4000K/5000K	120-277V	Type 5



ACCESSORIES ORDERING INFORMATION

Part #	Description
Sub "UNV" with "480"	480V
OS	Occupancy Sensor with Dimming
PTRPHSSBZ	House Side Shield PTRPL Bronze
PTRPHSSBK	House Side Shield PTRPL Black