



Garage Canopy Low Profile



*shown with Emergency Battery

*shown with Motion Sensor

Description

The LITELUME™ LED Garage canopy Low Profile (GCLP) is a low profile luminaire constructed with a IP65 rated one piece die cast housing suitable for both indoor and outdoor applications. Featuring a proprietary optical system with anti-glare lens making this fixture ideal for parking garages, storage areas, walkways and low or high security areas.

Fixture Information

Size:	20W/30W/45W/65W/90W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: White (WH) Custom Options: Black (BK) Dark Bronze (DB)
Mounting:	Sold separately
Lens:	Polycarbonate
CRI:	80
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor Bi-level motion sensor Remote control sensor Remote battery back-up kit
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3,500 to 11,600 lm

Lumens Per Watt (typical):

128 to 167 lm/W

CCT:

4000K
5000K

Distribution

Type V

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location
DLC Qualified
IP66 rated
Title 24 Compliant
TAA Compliant/BAA Optional







Dimension

Item	Diameter	Height
30W Canopy w/o Motion Sensor	12"	3.32"
45W Canopy w/o Motion Sensor	12"	3.32"
65W Canopy w/o Motion Sensor	12"	3.32"
90W Canopy w/o Motion Sensor	13.03"	3.15"
28W Canopy with Motion Sensor	12"	4.21"
42W Canopy with Motion Sensor	12"	4.21"
65W Canopy with Motion Sensor	12"	4.21"
90W Canopy with Motion Sensor	13.03"	4.29"

No Motion Sensor

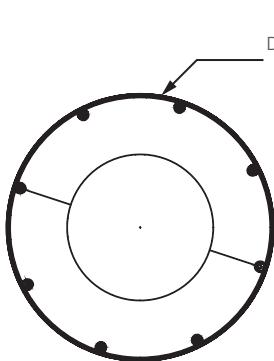

With Motion Sensor

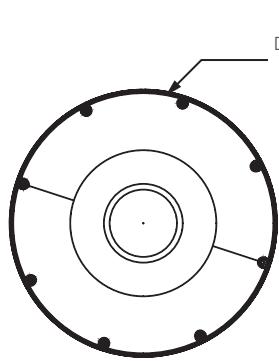


Mounting


Suitable for J-BOX mounting and easy installation. Also supports pendant mounting with wires coming out from the back for easier wire connections.

Photometrics

General

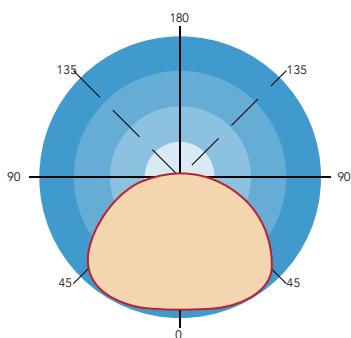

Parking Garage

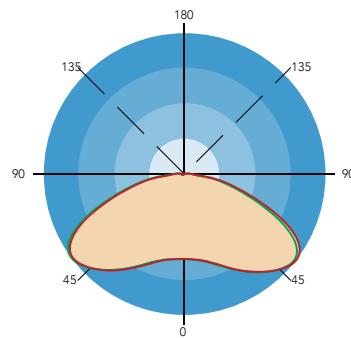



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-GCLP-30-50-UNV-WH	30	5000	5000	120-277
LL-GCLP-30-40-UNV-WH	30	4900	4000	120-277
LL-GCLP-45-50-UNV-WH	45	6500	5000	120-277
LL-GCLP-45-40-UNV-WH	45	6300	4000	120-277
LL-GCLP-65-50-UNV-WH	65	7700	5000	120-277
LL-GCLP-65-40-UNV-WH	65	7500	4000	120-277
LL-GCLP-[20][30][45][65]-2CCT-UNV-WH	20W/30W/45W/65W	3600/5000/6300/7700	4000K 5000K	120-277
LL-GCLP-90-50-UNV-WH	90	11600	5000	120-277
LL-GCLP-90-40-UNV-WH	90	11400	4000	120-277
LL-GCLP-[30][45][65][90]-2CCT-UNV-WH	30W/45W/65W/90W	4480/6580/8510/10400	4000K 5000K	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor **Single Wattage Fixtures Only**
BRI820-HB	Sharkward 480v 0-10v PIR Sensor **Single Wattage Fixtures Only**
ANT-5-4T	Sharkward 12-24v Dc 0-10v Plug And Play Microwave Sensor **Single Wattage Fixtures Only**
ANT-6-4T	Sharkward 12-24v Dc 0-10v Plug And Play PIR Sensor **Single Wattage Fixtures Only**
ANT-6-4T-BLE-SR	Sharkward Silvair 12-24v Dc 0-10v Plug And Play Bluetooth PIR Sensor **Single Wattage Fixtures Only**
ANT-6-4T-BLE-GE	Homewell GEBC 12-24v Dc 0-10v Plug And Play Bluetooth PIR Sensor **Single Wattage Fixtures Only**
C-EM-R-WH	Remote Emergency Battery Back-Up Kit For Canopy 8W White
RC-100	Remote Control 100
SUB "UNV" WITH "480"	480 Volt **Single Wattage Fixtures Only**

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-GCLP	Buy American Act Compliant for Garage Canopy Low Profile

* Please contact LITELUME for all Custom Option Requests