

# Flood Light Extra Large Double Size



### **Description**

**Fixture Information** 

The LITELUME™ Floodlight (LL-FL) Extra Large Double Size is a high performance LED solution designed with versatility and a slim, low profile design. The rugged, die-cast aluminum housing with UV resistant powder coat finish minimizes wind load requirements and features an integral, watertight LED driver compartment along with high performance aluminum heat sinks.

Applications: Parking lots, Auto dealerships, Billboard, Façade, Wall Washing, Landscape, and general outdoor lighting.

# **Performance Data**

#### Lumen Output:

48,000 to 50,000 lm

#### Lumens Per Watt (typical):

137 to 142 lm/W

CCT: 3000K 4000K 5000K

#### **Beam Angle:**

7H\*6V Optional 4H\*4V

#### Lifespan:

Up to 100,000 running hours

#### **Ratings & Certificates**

UL Listed For Wet Location IP65 rated



Wattage Re	eplacement
Existing Watts	Litelume Watts
1000-1500W	350W

Size:	350W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (BY)
Mounting:	Yoke Mount
Lens:	High Performance Acrylic NEMA 7H*6V optics. Optional NEMA 4H*4V optics.
CRI:	80
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V

Standard: No sensor

10-Year Limited Warranty

Custom: Button Photocell (120-277V)

Warranty:

LITELUME'

Sensor:


www.litelume.com info@litelume.con ©Lite Lume Corporation 2018 833.LED.LUME

Page 1/3 Rev Date: 10/21/2023




#### Dimension

Item	Width	Length	Height	Weight
Floodlight Large Extra Large Double Size	5.23″	16.64″	19.27″	31.27″



# **Photometrics**

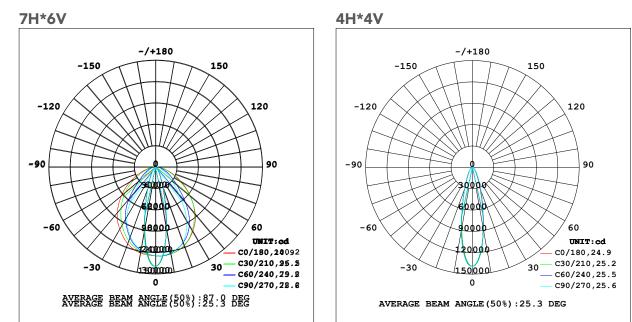

Page 2/3



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

# **Fixture Ordering Information**

Part #	Wattage	Lumens	Kelvin	Voltage	Beam Angle
LL-FL-350-50-UNV-N76-BZ-YM	350	50000	5000	120-277	7H*6V
LL-FL-350-40-UNV-N76-BZ-YM	350	50000	4000	120-277	7H*6V
LL-FL-350-30-UNV-N76-BZ-YM	350	48000	3000	120-277	7H*6V
LL-FL-350-50-UNV-N44-BZ-YM	350	49500	5000	120-277	4H*4V
LL-FL-350-40-UNV-N44-BZ-YM	350	49500	4000	120-277	4H*4V
LL-FL-350-30-UNV-N44-BZ-YM	350	48000	3000	120-277	4H*4V

### **Accessories Ordering Information**

Part #	Description
PC	Button Photocell, 120-277V
SUB"UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests

# **Buy American Act Compliant Ordering Information**

Part #	Description
BAA-FL350 Buy America Act Compliant For Floodlight 350W	

\* Please contact LITELUME for all Custom Option Requests

Page 3/3