





Description

Running Man All LED Exit Sign & Emergency Combo **Illumination:**

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized refl ector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-tocenter spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Ultra bright, energy effi cient, long-lasting white LED provides even, fully illuminated panel.

Electrical:

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and pushto-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends

Housing:

• Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Options


- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- RC: Remote capacity of 3.0 watts standard.

Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.



Dimensions:

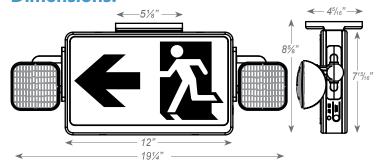



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		No. of Faces Housing Color		Options	
LL-RMLEDCXTEU	2	Universal Single/ Double Face	W B	White Black	RC HL SDT	Remote Capacity High Lumen Self-Diagnostics