



LED Doorpack Elite

IP65



Description

The LITELUME™ Doorpack Elite (LL-DPE) is a high performance LED solution designed with versatility and a small compact design. High impact weather resistant housing with UV resistant lens. Comes standard in selectable CCT, emergency battery backup & photocell with on/off dip switch.

Applications: Office buildings, apartments, town homes, storage facilities, man doors and a broad spectrum of overall multi-family, service and industrial applications.

Fixture Information

Size:	10W/20W
Housing:	High impact
Finish:	Protective powdercoat
Color:	Standard: Black Custom: Bronze (BZ) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Heat & Impact resistant PC
Power Factor:	.90
CRI:	80
Dimmable:	Standard: 0-10V, 10-100%
Temperature	-40°F-104°F
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Standard: Photocell with On/Off Dip Switch
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1,400 to 2,660 lm

Lumens Per Watt (typical):

133 to 140 lm/W

CCT:

3000K
4000K
5000K

Lifespan:

50,000 Hours based on IES LM80 results & TM21 calculations

Ratings & Certificates


UL Listed For Wet Location
IP65 rated
TAA Compliant





Dimension

Item	Width	Length	Height	Weight
LED Doorpack Elite	6.5"	2.5"	9.7"	1.83 lbs (10W) / 2.03 lbs (20W)

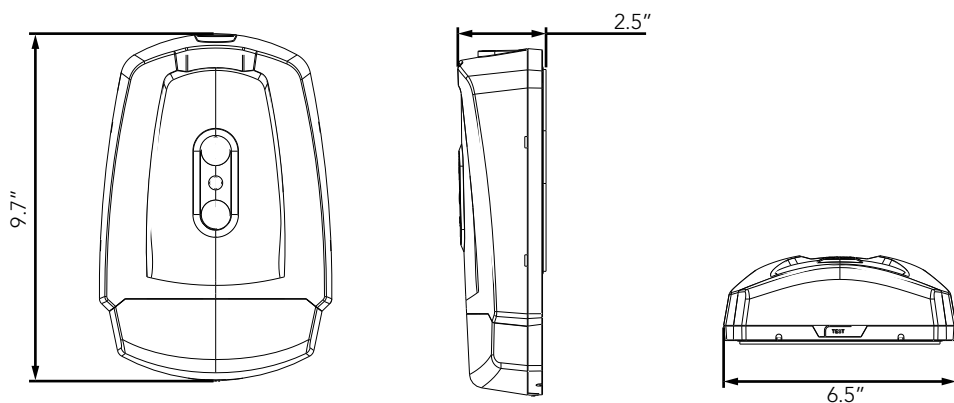

Features



Switchable Photocell

Enable or disable the photocell with on/off switch.



CCT Selectable

This fixture has the function of adjusting the color temperature on-site.

CCT selectable: 3000K, 4000K, 5000K



Integrated Emergency Battery Backup

All standard 120-277V models are available with an integrated battery backup for standby lighting in the event of power loss.

Wattage	Lumens	Operating Temperature	Working Time
4W	>700 lm	+18°C to 40°C	190 min
		0°C	160 min
		-20°C	100 min

Performance Data



System Watts	Voltage	CRI	3000K		4000K		5000K	
			Lumen	LPW	Lumen	LPW	Lumen	LPW
10W	120-277VAC	80	1300 lm	130 lm/W	1400 lm	140 lm/W	1350	135 lm/W
20W	120-277VAC	80	2550 lm	128 lm/W	2660 lm	133 lm/W	2600	130 lm/W

Electrical Data

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	310	10	120	0.08
		10	208	0.05
		10	240	0.04
		10	277	0.04
1	620	20	120	0.17
		20	208	0.10
		20	240	0.08
		20	277	0.07



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Lumen Package		Voltage		CCT		Finish		Emergency Battery		Diffuser		Photocell	
LL	LITELUME	DPE	Doorpack Elite	1L	1400 Lumens	UNV	120-277V	SCT*	Selectable Color Temperature	BZ	Bronze	EM	Emergency Battery Backup	C	Clear Lens	PC	Photocell with on/off dip switch
				3L	2660 Lumens					BK	Black			FL	Frosted Lens		
										WH	White						
										GY	Gray						
										CUS	Custom						

* SCT Selectable Color Temperature 3000k/4000k/5000k

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-DPE-1L-UNV-SCT-BK-EM-C-PC	10	1400	3000K 4000K 5000K	120-277
LL-DPE-1L-UNV-SCT-BZ-EM-C-PC	10	1400	3000K 4000K 5000K	120-277
LL-DPE-1L-UNV-SCT-WH-EM-C-PC	10	1400	3000K 4000K 5000K	120-277
LL-DPE-1L-UNV-SCT-GY-EM-C-PC	10	1400	3000K 4000K 5000K	120-277
LL-DPE-3L-UNV-SCT-BK-EM-C-PC	20	2660	3000K 4000K 5000K	120-277
LL-DPE-3L-UNV-SCT-BZ-EM-C-PC	20	2660	3000K 4000K 5000K	120-277
LL-DPE-3L-UNV-SCT-WH-EM-C-PC	20	2660	3000K 4000K 5000K	120-277
LL-DPE-3L-UNV-SCT-GY-EM-C-PC	20	2660	3000K 4000K 5000K	120-277

Accessories Ordering Information

Part #	Wattage
Sub "C" With "FL"	Frosted Lens for Doorpack

* Please contact LITELUME for all Custom Option Requests