



Ceiling Ellipse Now



Description

The LITELUME™ Ceiling Ellipse Now (LL-CEN) luminaire features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic lens for a soft appearance. Available in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	48W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Ceiling Mount
Lens:	High transmission acrylic
CRI:	90
Power Factor:	.98
THD:	<10%
Dimming:	0.10V Dimming level minimum 3%, flicker free
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3800 lm

Lumens Per Watt (typical):

79 lm/W

CCT:

3000K

Lifespan:

60,000 hrs

Ratings & Certificates


ETL/cETL Listed
Damp Location Listed
CEC Listed, Meets Title24 JA8 Requirements
JA10 Flicker Free





Dimension

Item	Depth	Width	Height
48W	18.1"	32.5"	4.3"

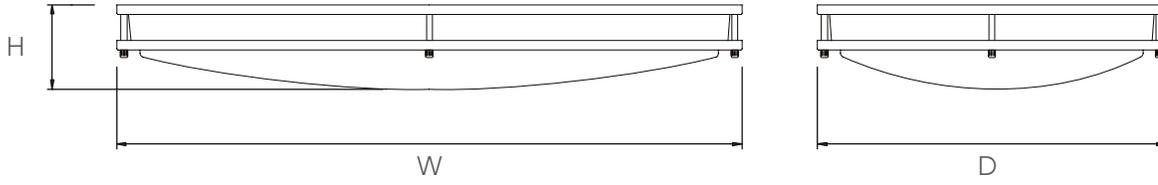



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CEN-48-30-UNV-SN	48	3800	3000	120-277V	Satin Nickel
LL-CEN-48-30-UNV-ORB	48	3800	3000	120-277V	Oil Rubbed Bronze