



# Wall Mounted Cylinder



## Description

The LITELUME™ Wall Mounted Cylinder Downlight (LL-WMCD) and Wall Mounted Cylinder Uplight Downlight (LL-WMCUD) features a die-cast aluminum housing with a powder coated finish. This fixture features High Power Factor, and low THD. Universal voltage, multiple lumen package and size allows for use in residential and commercial applications.

Applications: Security, Pathway, Accent, Hallway and Walkway lighting.

## Fixture Information

Size:	9W/18W
Housing:	Die-cast Aluminum
Finish:	Protective powdercoat
Color:	Standard: Bronze, Black
Mounting:	Standard: Wall Mount
Lens:	Clear Glass
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

750 to 1600 lm

### Lumens Per Watt (typical):

83 to 88 lm/W

### CCT:

3000K

4000K

### Lifespan:

50,000 running hours

## Ratings & Certificates

ETL/cETL Listed  
UL Wet Location Listed




**Intertek**



### Dimension

Item	Depth	Width	Height
9W	7"	4.5"	8"
18W	7"	4.5"	12"

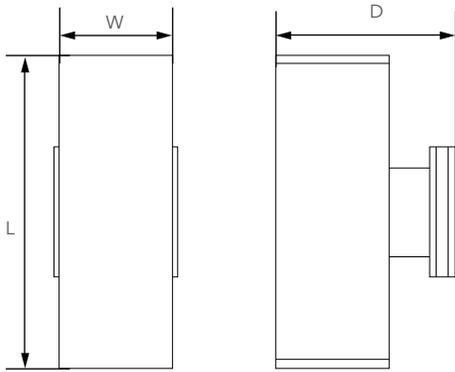



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Light
LL-WMCD-9-40-UNV-BZ	9	800	4000	120-277	Downlight
LL-WMCD-9-30-UNV-BZ	9	750	3000	120-277	Downlight
LL-WMCUD-18-40-UNV-BZ	18	1600	4000	120-277	Uplight/Downlight
LL-WMCUD-18-30-UNV-BZ	18	1500	3000	120-277	Uplight/Downlight
LL-WMCD-9-40-UNV-BK	9	800	4000	120-277	Downlight
LL-WMCD-9-30-UNV-BK	9	750	3000	120-277	Downlight
LL-WMCUD-18-40-UNV-BK	18	1600	4000	120-277	Uplight/Downlight
LL-WMCUD-18-30-UNV-BK	18	1500	3000	120-277	Uplight/Downlight

\* Please contact LITELUME for all Custom Option Requests