



Wallpack Medium



Description

The LITELUME™ Wallpack (LL-WPM) features a die-cast aluminum housing with a glass optical lens for long-lasting durability. Installation can be done without opening the driver box. CCT and Wattage Selectable.

Applications: Hallway, Perimeter lighting and Walkway lighting.

Fixture Information

Size:	26W/39W/52W/62W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Glass
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V
Power Factor:	.90
CRI:	80
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor Custom: Button Photocell (120-277V)
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:
3,600 to 7,800 lm

Lumens Per Watt (typical):
131-133 lm/W

CCT:
3000K
4000K
5000K

Lifespan:
Up to 100,000 running hours

Ratings & Certificates
UL Listed For Wet Location
Title 24 Compliant




Quick Ship Ordering Information

Part #
LL-WPM-[26][39][52][62]-3CCT-UNV-BZ




Dimension

Item	Width	Length	Height
Wallpack Medium	7.08"	11.95"	7.68"

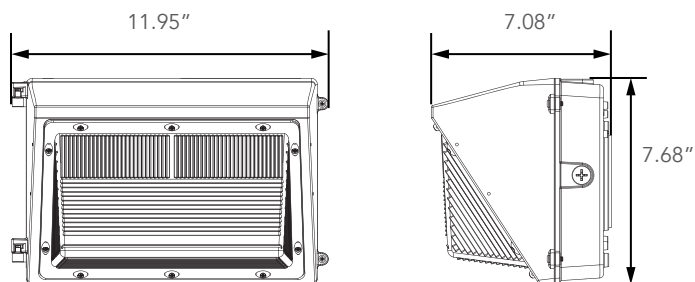

Photometrics

Luminous Intensity Distribution Curve

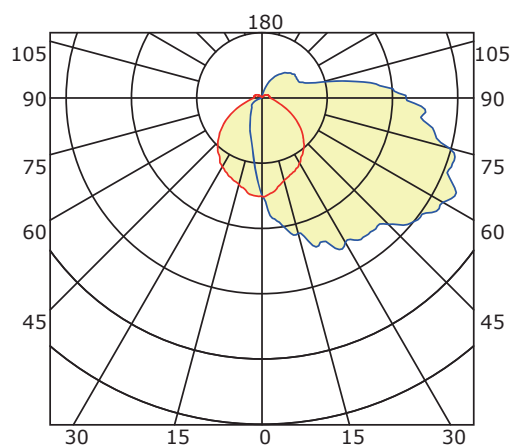

Average Diffuse Angle(50%): 103.0°

Structural Design





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-WPM-[26][39][52][62]-3CCT-UNV-BZ	26W/39W/52W/62W	3600/5200/6600/7800	3000K/4000K/5000K	120-277

Quick Ship Ordering Information

Part #
LL-WPM-[26][39][52][62]-3CCT-UNV-BZ

Accessories Ordering Information

Part #	Wattage
PC	Button Photocell, 120-277V
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
EM8	Emergency Battery Back Up 8W

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-WPM	Buy American Act Compliant for Wallpack Medium

* Please contact LITELUME for all Custom Option Requests