



Kensington Decorative Post Top - Made in USA - Delaware



LL-DE-KENS

Kensington Decorative Post Top

The LITELUME™ Kensington (LL-DE-KENS) is a high performance premium specification grade LED decorative post top fixture built with cast aluminum made in the USA with the highest quality standards.



PERFORMANCE DATA

Lumen Output	1,454 - 20,861 lm
Lumens Per Watt (typical)	120 - 140 lm/W
CCT	3000K 4000K 5000K 2700K, Amber, LPS (1800K) – <i>Offered for Some Wattages - Consult Factory</i>
Lifespan	100,000 hrs

RATINGS & CERTIFICATES

Wet location • IP65
ETL Listed to UL 1598 Standard

APPLICATIONS

Municipality • Pathway • Perimeter
Pedestrian • Walkway

FIXTURE INFORMATION

Size	Housing	Finish	Mounting		Color
10W - 155W	Cast Aluminum	Durable Polyester Powder Coat Finish Over a Chromate Conversion Coating. Custom Finishes Available, Including Patinas and All RAL Colors.	Post Top Slips Over 2 7/8" - 3" Pole Tenon		<ul style="list-style-type: none"> • Black • White • Dark Bronze • Dark Green • Gray • Custom
Voltage	Dimming	Electrical	PF	CRI	Warranty
120 - 277V 480V	0-10V	Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)	.90	70	10 Year Limited



Kensington Decorative Post Top - Made in USA - Delaware



PHOTOMETRIC DATA - FULL GLOBE, NO SPINNING

PERFORMANCE DATA SPECIFICATIONS

Lumen Output for Kensington with Full Globe - No Spinning

Wattage (Lumen Package)	10W (1L)	15W (2L)	20W (3L)	30W (4L)	40W (5L)	50W (7L)	60W (8L)	70W (9L)	80W (11L)	90W (12L)	105W (14L)	120W (16L)	135W (18L)	155W (21L)	
Size (Dia.)	6"	6"	6"	6"	8"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
1 = Type I Clear, Frosted, or Ribbed Lens	3K	NOT AVAILABLE							8,830	10,091	11,353	13,239	15,137	17,029	19,552
	4K	NOT AVAILABLE							9,013	10,301	11,588	13,519	15,451	17,382	19,957
	5K	NOT AVAILABLE							9,150	10,457	11,765	13,725	15,686	17,647	20,261
	BUG Rating	NOT AVAILABLE							B3-U3-G2	B3-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
2 = Type II Clear, Frosted, or Ribbed Lens	3K	1,454	1,907	2,543	3,815	5,086	6,357	7,629	8,900	10,171	11,443	13,344	15,257	17,164	19,707
	4K	1,483	1,947	2,596	3,894	5,191	6,489	7,787	9,085	10,382	11,680	13,627	15,573	17,520	20,115
	5K	1,506	1,976	2,635	3,953	5,270	6,588	7,905	9,223	10,540	11,858	13,834	15,811	17,787	20,422
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
3 = Type III Clear, Frosted, or Ribbed Lens	3K	1,451	1,904	2,539	3,808	5,077	6,346	7,617	8,886	10,155	11,424	13,322	15,232	17,136	19,675
	4K	1,481	1,944	2,592	3,887	5,183	6,478	7,774	9,070	10,365	11,661	13,604	15,548	17,491	20,082
	5K	1,504	1,973	2,631	3,946	5,262	6,577	7,892	9,208	10,523	11,838	13,812	15,785	17,758	20,388
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
4 = Type IV Clear, Frosted, or Ribbed Lens	3K	1,419	1,861	2,483	3,724	4,965	6,206	7,448	8,689	9,930	11,171	13,027	14,895	16,756	19,239
	4K	1,448	1,901	2,534	3,801	5,068	6,335	7,602	8,869	10,136	11,402	13,303	15,204	17,104	19,638
	5K	1,470	1,929	2,573	3,859	5,145	6,431	7,718	9,004	10,290	11,576	13,506	15,435	17,365	19,937
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B2-U3-G3	B2-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G4
5 = Type V Clear, Frosted, or Ribbed Lens	3K	1,485	1,948	2,598	3,897	5,195	6,494	7,793	9,092	10,390	11,689	13,631	15,585	17,533	20,131
	4K	1,515	1,989	2,652	3,977	5,303	6,628	7,955	9,280	10,606	11,931	13,920	15,908	17,897	20,548
	5K	1,539	2,019	2,692	4,038	5,384	6,729	8,075	9,421	10,767	12,113	14,132	16,151	18,170	20,861
	BUG Rating	B1-U2-G1	B2-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G2	B3-U3-G2	B3-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G3	B4-U3-G3	B5-U3-G3

Please refer to the fixture's IES file for detailed information. Subject to change.



Kensington Decorative Post Top - Made in USA - Delaware



PHOTOMETRIC DATA – GLOBE WITH TOP SPINNING

PERFORMANCE DATA SPECIFICATIONS

Lumen Output for Kensington with Clear, Frosted or Ribbed Lens

Wattage (Lumen Package)	10W (1L)	15W (2L)	20W (3L)	30W (4L)	40W (5L)	50W (7L)	60W (8L)	70W (9L)	80W (11L)	90W (12L)	105W (14L)	120W (16L)	135W (18L)	155W (21L)	
Size (Dia.)	6"	6"	6"	6"	8"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
1 = Type I Clear, Frosted, or Ribbed Lens	3K	NOT AVAILABLE							8,165	9,331	10,498	12,248	13,997	15,747	18,080
	4K	NOT AVAILABLE							8,335	9,525	10,716	12,502	14,287	16,073	18,454
	5K	NOT AVAILABLE							8,461	9,670	10,879	12,692	14,506	16,318	18,736
	BUG Rating	NOT AVAILABLE							B3-U3-G2	B3-U3-G2	B3-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
2 = Type II Clear, Frosted, or Ribbed Lens	3K	1,344	1,763	2,352	3,527	4,703	5,878	7,055	8,230	9,405	10,582	12,345	14,108	15,872	18,223
	4K	1,371	1,800	2,400	3,600	4,800	6,001	7,200	8,401	9,600	10,801	12,601	14,400	16,200	18,601
	5K	1,392	1,828	2,437	3,655	4,874	6,091	7,310	8,528	9,747	10,965	12,793	14,621	16,447	18,884
	BUG Rating	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B3-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3
3 = Type III Clear, Frosted, or Ribbed Lens	3K	1,342	1,760	2,348	3,521	4,695	5,869	7,043	8,217	9,390	10,564	12,325	14,085	15,846	18,193
	4K	1,369	1,797	2,396	3,595	4,792	5,991	7,188	8,387	9,584	10,783	12,580	14,377	16,174	18,570
	5K	1,390	1,825	2,433	3,649	4,866	6,081	7,298	8,514	9,731	10,947	12,772	14,597	16,420	18,853
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
4 = Type IV Clear, Frosted, or Ribbed Lens	3K	1,312	1,721	2,296	3,443	4,591	5,739	6,887	8,034	9,182	10,330	12,052	13,773	15,495	17,791
	4K	1,339	1,758	2,343	3,515	4,686	5,858	7,029	8,201	9,372	10,544	12,302	14,058	15,816	18,159
	5K	1,359	1,784	2,379	3,569	4,758	5,947	7,136	8,326	9,515	10,705	12,489	14,274	16,057	18,436
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
5 = Type V Clear, Frosted, or Ribbed Lens	3K	1,373	1,801	2,402	3,603	4,804	6,005	7,207	8,407	9,608	10,809	12,610	14,412	16,213	18,615
	4K	1,401	1,839	2,452	3,678	4,903	6,130	7,355	8,582	9,807	11,033	12,872	14,710	16,549	19,001
	5K	1,423	1,867	2,489	3,734	4,979	6,222	7,467	8,712	9,956	11,201	13,068	14,935	16,801	19,291
	BUG Rating	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G1	B3-U3-G2	B3-U3-G2	B3-U3-G2	B3-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G3	B4-U3-G3

Please refer to the fixture's IES file for detailed information. Subject to change.



Kensington Decorative Post Top - Made in USA - Delaware



PHOTOMETRIC DATA – OPEN FULL CUTOFF FIXTURES

PERFORMANCE DATA SPECIFICATIONS

Lumen Output for Kensington with No Secondary Lens

Wattage (Lumen Package)	10W (1L)	15W (2L)	20W (3L)	30W (4L)	40W (5L)	50W (7L)	60W (8L)	70W (9L)	80W (11L)	90W (12L)	105W (14L)	120W (16L)	135W (18L)	155W (21L)	
Size (Dia.)	6"	6"	6"	6"	8"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
1 = Type I Clear PC Lens	3K	NOT AVAILABLE							7,291	8,332	9,374	10,545	10,936	14,060	16,143
	4K	NOT AVAILABLE							7,442	8,505	9,568	10,764	11,163	14,352	16,478
	5K	NOT AVAILABLE							7,555	8,634	9,714	10,928	11,333	14,570	16,729
	BUG Rating	NOT AVAILABLE							B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
2 = Type II Clear PC Lens	3K	1,109	1,634	2,179	3,268	4,358	5,447	6,537	7,626	8,716	9,805	11,440	13,074	14,708	16,887
	4K	1,112	1,668	2,224	3,336	4,448	5,560	6,672	7,785	8,896	10,008	11,677	13,344	15,013	17,237
	5K	1,129	1,634	2,258	3,387	4,516	5,644	6,774	7,903	9,032	10,161	11,854	13,548	15,241	17,499
	BUG Rating	B0-U0-G0	B1-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2
3 = Type III Clear PC Lens	3K	1,142	1,713	2,284	3,427	4,569	5,711	6,853	7,996	9,138	10,280	11,564	11,992	15,419	17,703
	4K	1,165	1,749	2,332	3,497	4,664	5,829	6,996	8,161	9,327	10,493	11,804	12,242	15,739	18,070
	5K	1,183	1,776	2,367	3,550	4,734	5,919	7,102	8,285	9,469	10,652	11,984	12,428	15,979	18,345
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
4 = Type IV Clear PC Lens	3K	1,140	1,711	2,281	3,422	4,562	5,703	6,843	7,985	9,125	10,265	11,548	11,976	15,398	17,679
	4K	1,164	1,747	2,329	3,492	4,657	5,821	6,986	8,150	9,314	10,478	11,788	12,225	15,717	18,046
	5K	1,182	1,773	2,364	3,546	4,728	5,910	7,092	8,274	9,456	10,638	11,967	12,411	15,956	18,320
	BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B3-U0-G3	B3-U0-G4

Continued on Next Page



Kensington Decorative Post Top - Made in USA - Delaware

Lumen Output for Kensington with No Secondary Lens

Wattage (Lumen Package)	10W (1L)	15W (2L)	20W (3L)	30W (4L)	40W (5L)	50W (7L)	60W (8L)	70W (9L)	80W (11L)	90W (12L)	105W (14L)	120W (16L)	135W (18L)	155W (22L)	
Size (Dia.)	6"	6"	6"	6"	8"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
5 = Type V Clear PC Lens	3K	1,210	1,815	2,420	3,632	4,842	6,052	7,262	8,473	9,683	10,983	12,255	12,709	16,340	18,761
	4K	1,235	1,854	2,471	3,706	4,942	6,177	7,413	8,648	9,884	11,119	12,509	12,973	16,679	19,150
	5K	1,254	1,882	2,508	3,762	5,017	6,272	7,526	8,780	10,034	11,289	12,700	13,171	16,933	19,441
	BUG Rating	B1-U0-G0	B1-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G3
5 = Type V with LumaLens	3K	NOT AVAILABLE										8,562	9,785	11,008	12,639
	4K	NOT AVAILABLE										8,740	9,988	11,236	12,900
	5K	NOT AVAILABLE										8,872	10,140	11,407	13,097
	BUG Rating	NOT AVAILABLE										B2-U3-G2	B2-U3-G3	B3-U3-G3	B3-U3-G3

Please refer to the fixture's IES file for detailed information. Subject to change.

STYLES



LL-DE-KENS with RCA Globe, C9 Capital, No Cage, No Spinning, No Finial



Fitter section slips over 3" or 2 7/8" pole or tenon →

LL-DE-KENS with C1 Capital, PA Lens, A1 Cage, T3 Top Spinning and No Finial




LL-DE-KENS Open with C1 Capital, A1 Cage, T3 Spinning, No Finial & No Secondary Lens


EPA: 2.2 Weight: 32 lbs (Max.)




DIMENSIONS

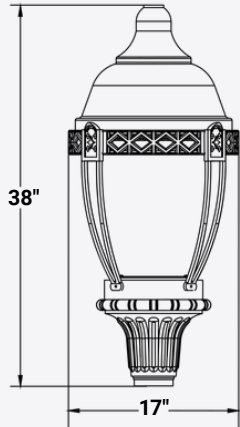

Full Cutoff, Spinning, Cage and No Secondary Lens

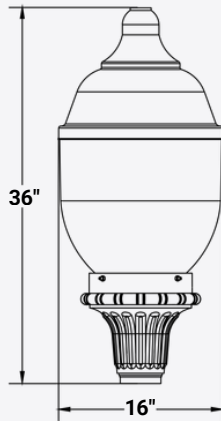

Full Globe, No Cage

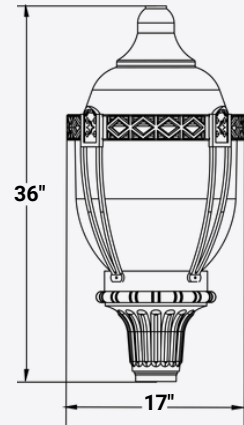

Globe with Cage and Spinning

CAPITALS

PLC1 - 8 3/4" High



PLC2 - 10 13/16" High



PLC3 - 6 7/8" High



PLC4 - 7 13/16" High



PLC5 - 9 15/16" High



PLC6 - 8 1/16" High



PLC7 - 8 3/8" High



PLC8 - 11 3/8" High



PLC9 - 14 1/4" High



PLC10 - 10 1/4" High



PLC11 - 15" High









PLC12 - 12 3/4" High









BANDS & CAGES

A1 - Cast Aluminum Perforated Cage	A2 - Cast Aluminum Band	A3 - Cast Aluminum Cage
 <p>No Secondary Lens With Secondary Lens</p>	 <p>With Secondary Lens</p>	 <p>No Secondary Lens With Secondary Lens</p>
A6 - Cast Aluminum Cage, Perforated Ban	A6M - Cage with Medallions *	A7 - Cast Aluminum Cage, Flat Band
 <p>No Secondary Lens With Secondary Lens</p>	 <p>No Secondary Lens With Secondary Lens</p>	 <p>No Secondary Lens With Secondary Lens</p>

* **Note:** A1, A6, and A7 are available with Medallions. Add M to the end of the part number.

SPINNINGS

T1 - T101 Top Spinning	T2 - T102 Top Spinning	T3 - T103 Top Spinning	T4 - T104 Top Spinning
			



Kensington Decorative Post Top - Made in USA - Delaware

FIXTURE FINIALS			
GF2 - 6"	GF3 - 6"		GF4 - 6"
GF5 (Plastic) GF6 (Cast) - 4"	GF8 - 4"	GF9 - 4.25"	GF10 - 3.5"
GF12 - 2.75"	GF17 - 4"	GF18 - 2.75"	GF24 - 4.75"



Kensington Decorative Post Top - Made in USA - Delaware

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Location	Fixture Type
LL LITELUME	DE Delaware	KENS Kensington Decorative Post Top

Globe/Lens	Capital	Lumen Package
NL No Secondary Lens * PA Prismatic Acrylic ** RCA Ribbed Clear Acrylic SA Stippled Acrylic ** RFA Ribbed Frosted Acrylic SP Stippled Polycarbonate ** <i>* Must only be ordered with Top Spinning and Cage</i> <i>** Must only be ordered with Top Spinning</i>	C1 PLC1 C7 PLC7 C2 PLC2 C8 PLC8 C3 PLC3 C9 PLC9 C4 PLC4 C10 PLC10 C5 PLC5 C11 PLC11 C6 PLC6 C12 PLC12	1L 1000 Lumens 9L 9000 Lumens 2L 2000 Lumens 11L 11000 Lumens 3L 3000 Lumens 12L 12000 Lumens 4L 4000 Lumens 14L 14000 Lumens 5L 5000 Lumens 16L 16000 Lumens 7L 7000 Lumens 18L 18000 Lumens 8L 8000 Lumens 21L 21000 Lumens

Voltage	CCT	Distribution	Bands & Cages	Spinning
UNV 120-277V 480 480V	30 3000K 40 4000K 50 5000K	T1 Type 1 * T2 Type 2 T3 Type 3 T4 Type 4 T5 Type 5 <i>* 9L and above only</i>	A1 DECA1 A2 DECA2 * A3 DECA3 A6 Perforated Band w/Cage A7 Flat Band w/Cage N None <i>* Not available with NL Globe</i>	T1 T101 T2 T102 T3 T103 T4 T104 N None

Options	Finial	Finish
PC Button Eye Photo Control PCR3 3 Pin Twist Lock Receptacle * ** PCR7 7 Pin Twist Lock Receptacle * ** N None <i>* C8, C10 & C12 Capitols Only</i> <i>** Photo Cell Not Included</i>	E GF5 * B GF2 C GF3 D GF4 F GF6 H GF8 I GF9 J GF10 K GF12 O GF17 P GF18 V GF24 N None <i>* Standard Finial</i>	BK Black Powder Coat WH White Powder Coat DBZ Dark Bronze Powder Coat DGR Dark Green Powder Coat GY Gray Powder Coat CUS Custom *