



Description

3.5" LED Trims

Features:

- Available in 3000k and 4000k color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 50,000 hours of operation.**
- Provides at least 560 nominal lumens.
- 9 nominal watts.
- Color rendering index (Ra) > 90.
- 120 AC voltage is standard.
- Dimmable down to 10% with most line voltage dimmers.
- Die-cast housing painted white.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with 3.25-3.5" ceiling cut-outs.
- Compatible with BL350 series.
- This device is not intended for use with emergency exits.

* Contact factory for other color temperatures and lumen packages.


** L70 hours are IES TM-21-11 calculated hours.

Warranty/Listing:

- cULus listed for damp locations
- Title 24 compliant
- Energy Star qualified
- Complies with RoHS (Restriction on Hazardous Substances) requirements
- 10-year warranty of all electronics and housing.



Dimensions

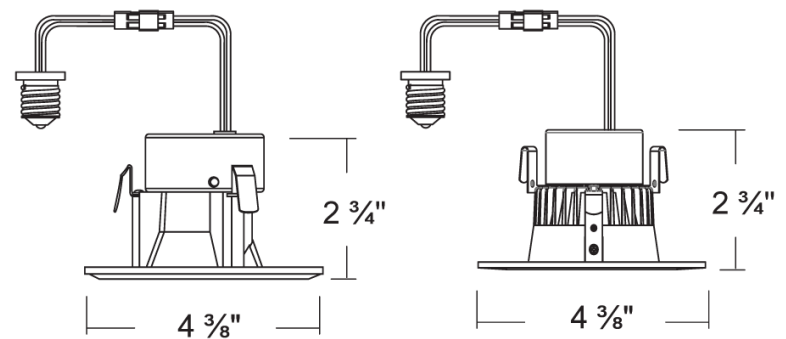



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Cans Ordering Information

Model	Description
LL-BL350ICATLEDNND-QN	3.5" Dedicated LED IC Housing For New Construction Applications
LL-BL350ICATLEDRND-Q	3.5" Dedicated LED IC Housing For Remodel Applications

Trim Ordering Information

Model	Description
LL-BRK-LED350-BW-3K	3.5" LED Round Baffle Trim, 3000K
LL-BRK-LED350-BW-4K	3.5" LED Round Baffle Trim, 4000K
LL-BRK-LED350-BWSQ-3K	3.5" LED Square Baffle Trim, 3000K