



Post Top Round Premium Small



LL-PTRPS

Post Top Round Premium Small

The LITELUME™ Post Top Round Premium Small (LL-PTRPS) combines style and performance with its seamless appearance. Featuring a die-cast aluminum housing with outstanding corrosion protection. Round and smooth in design with soft light. Suitable for mounting heights of 8-20'.



PERFORMANCE DATA

Lumen Output	2750 - 8250 lm
Lumens Per Watt (typical)	138 lm/W
CCT - Field Selectable	3000K 4000K 5000K
Lifespan	Features Ultra Efficient Driver with up to 100,000 running hours

RATINGS & CERTIFICATES

UL & cULus for Wet Location
3G Vibration Rated • IP65

APPLICATIONS

Pathway • Walkway • Municipality
General Lighting Applications

FIXTURE INFORMATION

Size	Housing	Finish	Lens		Mounting		Color	Distribution
20W - 60W	Die-Cast Aluminum	Protective Powder Coat	UV Polycarbonate		Tenon fits 2 3/8" - 3" Standard OD		Standard: Bronze with Color Options	Type 5
Voltage		Dimming		PF	THD	CRI	Controls	
Standard: 120-277V Optional: 480V		Standard: 0-10V 100% - 10%		.90	<20%	80	Photocell with On/Off Dip-Switch Included	
Warranty								
10 Year Limited								

Operating Temperature: -40°F to 140°F




Post Top Round Premium Small

SPECIFICATION


Model	Nominal Watts	Lumen *	Efficacy *
LL-PTRPS	20W / 40W / 60W	8243 lm *	135.6 lm/W *

* Lumen and Efficacy are based on the highest wattage at 5000K

DIMENSIONS

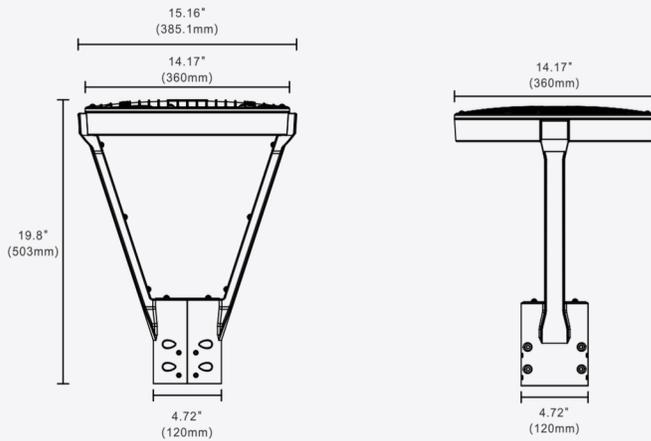

Line Drawing






SELECTABLE WATTAGE & CCT


60W



40W



20W



5000K




4000K



3000K



TYPE 5 OPTICAL DISTRIBUTION

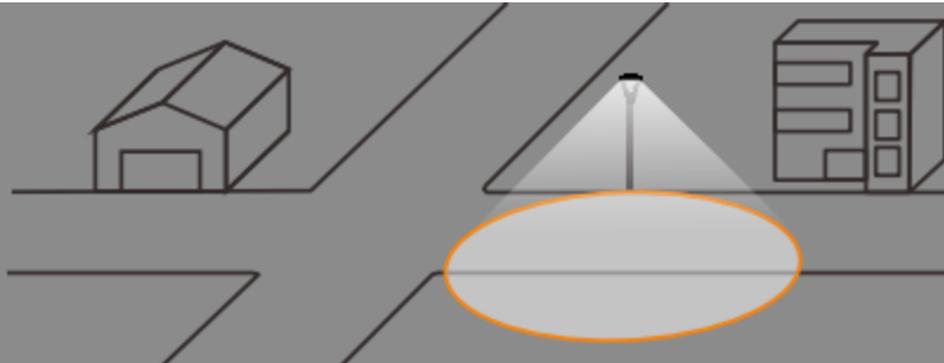



Post Top Round Premium Small

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Lumen Package	Voltage	CCT
LL LITELUME	PTRPS Post Top Round Premium Small	8L 8250 Lumens	UNV 120-277V 480 480V	SCT Selectable Color Temperature
Power	Distribution	Finish	Photocell	Accessories
SP Selectable Power	T5 Type 5	BZ Bronze BK Black WH White GY Gray DGR Dark Green CUS Custom	PC Photocell with On/Off Dip Switch	OS Occupancy Sensor with Dimming

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage	Distribution
LL-PTRPS-8L-UNV-SCT-SP-BZ-PC	20W/40W/60W	2750/5500/8250	3000K/4000K/5000K	120-277V	Type 5
LL-PTRPS-8L-UNV-SCT-SP-BK-PC	20W/40W/60W	2750/5500/8250	3000K/4000K/5000K	120-277V	Type 5

ACCESSORIES ORDERING INFORMATION

Part #	Description
Sub "UNV" with "480"	480V
OS	Occupancy Sensor with Dimming