



Wallpack Contour



Description

The LITELUME™ LED Wallpack Contour (LL-WPCTR) Specification grade luminaire incorporates an aesthetically pleasing appearance with elegant edges and modern symmetry. Die-cast aluminum construction and shatter-resistant high impact polycarbonate acrylic optical lens with UV stabilizers.

Applications: Entryways, Pathway, Perimeter and Security lighting.

Fixture Information

Size:	20W/30W/40W
Housing:	Die-cast Aluminum
Finish:	Protective powdercoat
Color:	Standard: Bronze (BZ) Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall mount
Lens:	Polycarbonate
Voltage:	Standard: 120-277V
CRI:	80
THD:	<20%
Surge Protector:	Optional 10kVA
Dimming:	Standard 0-10V continous
Sensor:	Standard: Photocell
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

2,914 to 5,828 lm

Lumens Per Watt (typical):

146 lm/W

CCT:

3000K
4000K
5000K

Lifespan:

70,000 Hours based on IES LM80 results & TM21 calculations

Ratings & Certificates


UL Listed For Wet Location
IP66





Dimension

Item	Width	Length	Height
LL-WPCTR	8.65"	5.37"	7.56"

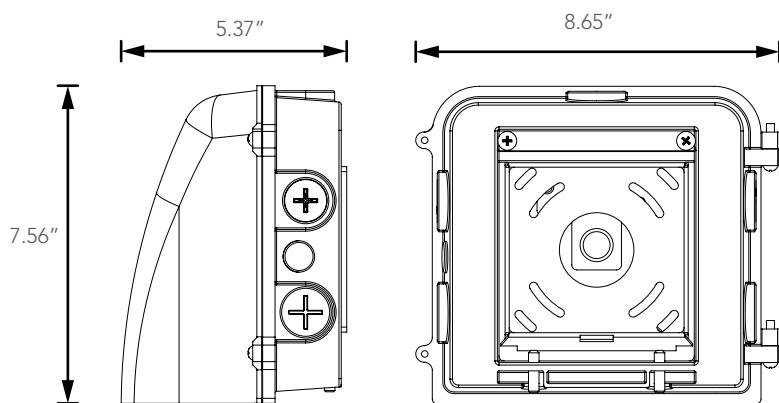


Features:







User-friendly Installation Instructions

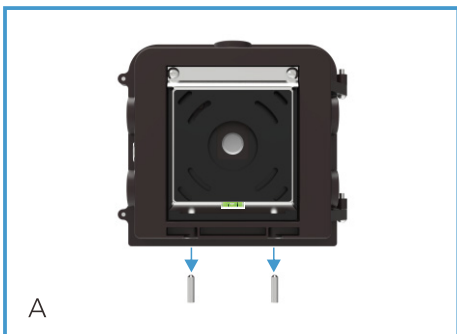

A
Uninstall the mounting bracket from fixture base plate by unscrewing the 2 hex socket studs.

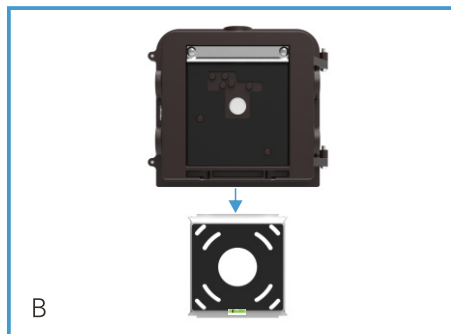

B
Remove the mounting bracket.

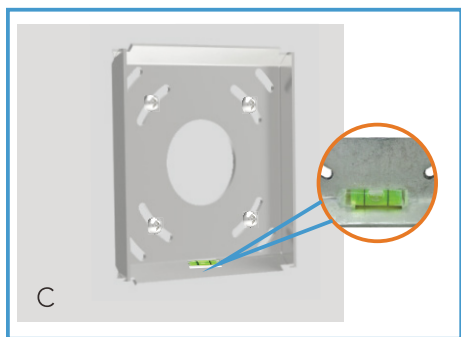

C
Using the level bubbler to level the bracket to the intended altitude. Install the bracket on the wall.



D
Lift the fixture up and tilt it slightly towards the wall bracket as figure D shows. Hook the fixture base plate to the mounting bracket.



E
Tightly screw and secure the fixture to the bracket.



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Lumen Package		Voltage		CCT		Power		Finish	
LL	LITELUME	WPCTR	Wallpack Contour	6L	6000 Lumens	UNV	120-277V	SCT	Selectable color temperature *	SP	Selectable Power	BZ	Bronze
												BK	Black
												WH	White
												GY	Gray
												CUS	Custom

Photocell		Emergency Battery	
PC	Photocell	EM4	Emergency battery backup 4w title 20 compliant

* SCT Selectable color temperature 3000K/4000K/5000K

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution
LL-WPCTR-6L-UNV-SCT-SP-BZ-PC	20W/30W/40W	2914/4371/5828	3000K 4000K 5000K	120-277	Type 5

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
EM4	Emergency Battery Back Up 4W *Title 20 Compliant
EM8	Emergency Battery Back Up 8W **8L & 11L Models Only**
HD401V	Haisen 120-277V Dimming Microwave Motion Sensor
HD05R	Haisen Universal Smart Remote Control
SP10KVA	Surge Protector 10kVA