



# Pendant Series B



## LL-PSB

### Pendant Series B

The LITELUME™ LED Pendant Series B (LL-PSB) features a die-formed cold rolled steel housing in satin nickel, black or oil rubbed bronze with a opal glass shade for an elegant soft appearance.



#### PERFORMANCE DATA

Lumen Output	800 - 2400 lm
Lumens Per Watt (typical)	89 lm/W
CCT	3000K 4000K
Lifespan	30,000 hrs

#### RATINGS & CERTIFICATES

Energy Star • cULus Listed

#### APPLICATIONS


Dining • Vanity • Bathrooms • Hospitals  
Schools • Restaurants • Offices • Hallways  
Commercial, Residential & Hospitality

#### FIXTURE INFORMATION

Size	Housing	Shade	Lamp	Mounting	Color	
9W - 27W	Die-Formed Cold-Rolled Steel	Opal Glass	Omni Directional Dimmable E26 LED Bulb	Ceiling	<ul style="list-style-type: none"> <li>Black</li> <li>Satin Nickel</li> <li>Oil Rubbed Bronze</li> </ul>	
Voltage	Dimming Range	Dimming Protocol	PF	THD	CRI	Warranty
120V	1%	Triac (Leading Edge)	.98	<10%	80	10 Year

## DIMENSIONS


1 Lamp

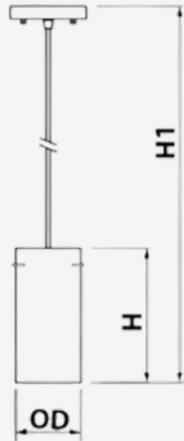

(OD x H x H1)  
4.8" x 9.8" x 42.0"

**Note:** H1- Total Height

3 Lamp

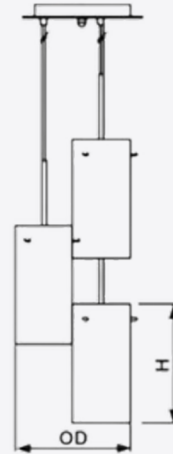

(OD x H x H1)  
11.0" x 9.8" x 6'

**Note:** H1- Hanging Cord Length



# Pendant Series B

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

## ORDERING GUIDE

Brand	Fixture Type	Lamps	
LL LITELUME	PSB Pendant Series B	1 1 Lamp 3 3 Lamp	
Watts	CCT	Voltage	Color
9 9W 27 27W	40 4000K 30 3000K	120 120V	SN Satin Nickel ORB Oil Rubbed Bronze BK Black

## FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-PSB-1-9-40-120-SN	9	800	4000	120
LL-PSB-1-9-40-120-BK	9	800	4000	120
LL-PSB-1-9-40-120-ORB	9	800	4000	120
LL-PSB-1-9-30-120-SN	9	800	3000	120
LL-PSB-1-9-30-120-BK	9	800	3000	120
LL-PSB-1-9-30-120-ORB	9	800	3000	120
LL-PSB-3-27-40-120-SN	27	2400	4000	120
LL-PSB-3-27-40-120-BK	27	2400	4000	120
LL-PSB-3-27-40-120-ORB	27	2400	4000	120
LL-PSB-3-27-30-120-SN	27	2400	3000	120
LL-PSB-3-27-30-120-BK	27	2400	3000	120
LL-PSB-3-27-30-120-ORB	27	2400	3000	120