



Wallpack Large – Semi Cutoff



Description

The LITELUME™ Wallpack Large – Semi Cutoff (LL-WPLSC) is a Wall mounted LED fixture with a durable polycarbonate optical lens.

Applications: Entryways, Pathway, Perimeter and Security lighting.

Fixture Information

Size:	28W/42W/48W/56W/70W/72W/ 96W/120W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powder coat
Color:	Standard: Bronze Custom Options: Black (BK) White (WH) Grey (GY)
Mounting:	Standard: Wall Mount
Lens:	Polycarbonate
CRI:	80
Power Factor:	.90
Operating Temperature:	-22°F to 113°F
Sensor:	Standard: Button Photocell (120- 277V) & Photocell Plug
Dimming:	Standard: 0-10V continuous
Voltage:	Standard:120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

4,483 to 17,226 lm

Lumens Per Watt (typical):

140 lm/W

CCT:

3000K

4000K

5000K

Distribution:

96.3 X 71°

95.3 X 62.9°

Lifespan:

Up to 100,000 running hours

Ratings & Certificates


UL Listed For Wet Location






Dimension

Item	Wide	Depth	Height	Weight
28W-70W	14.03"	7.82"	6.26"	6.99 lbs
48-120W	13.98"	6.08"	6.18"	9.1 lbs

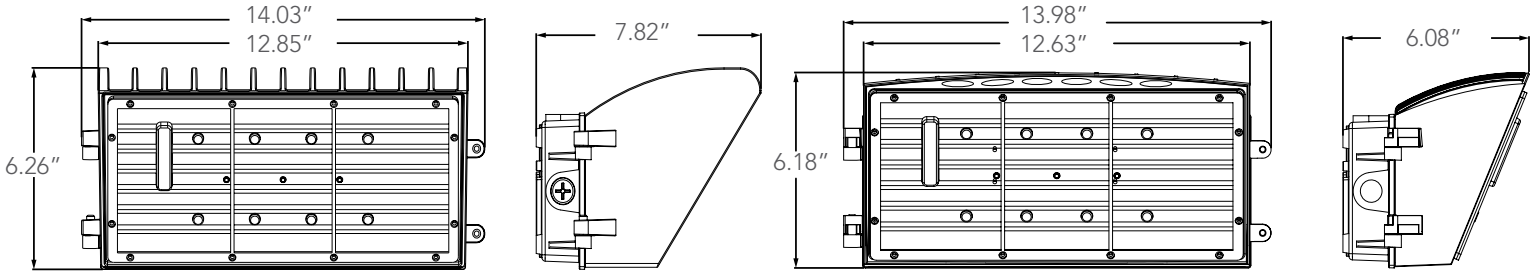


Photometrics

28W-4000K

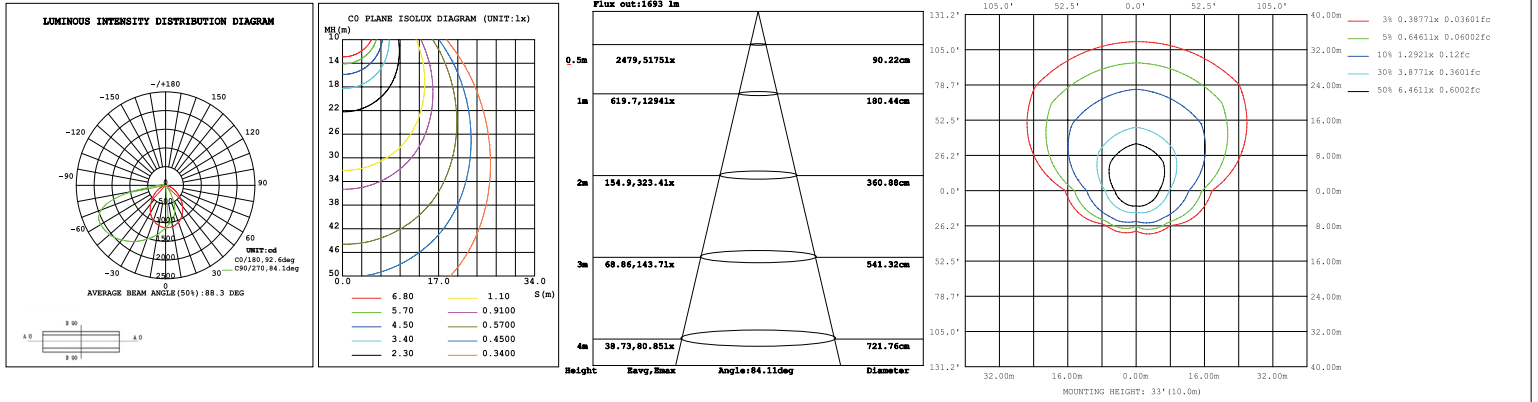


42W-4000K

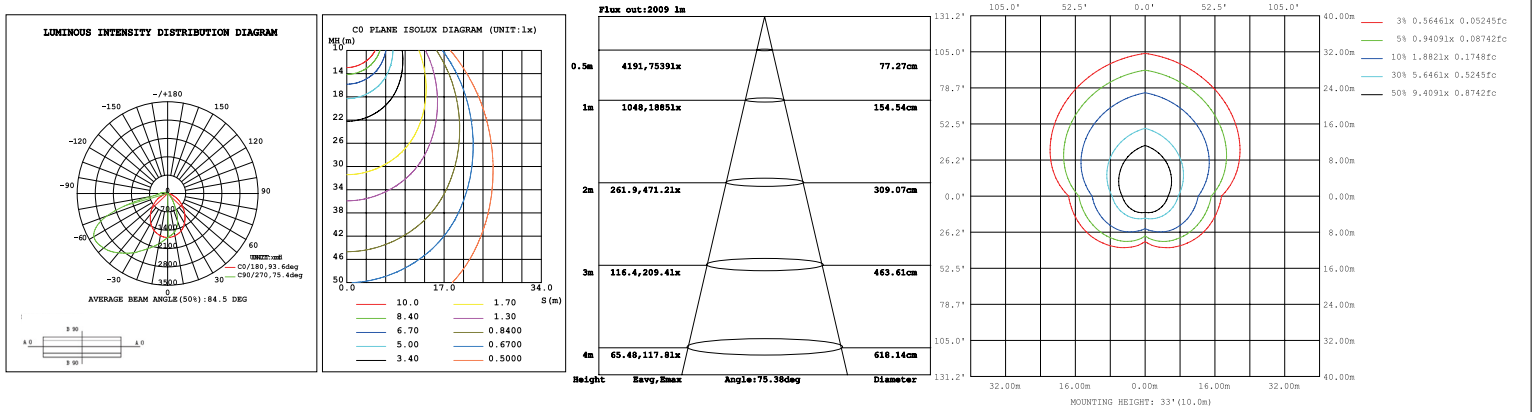





56W-4000K

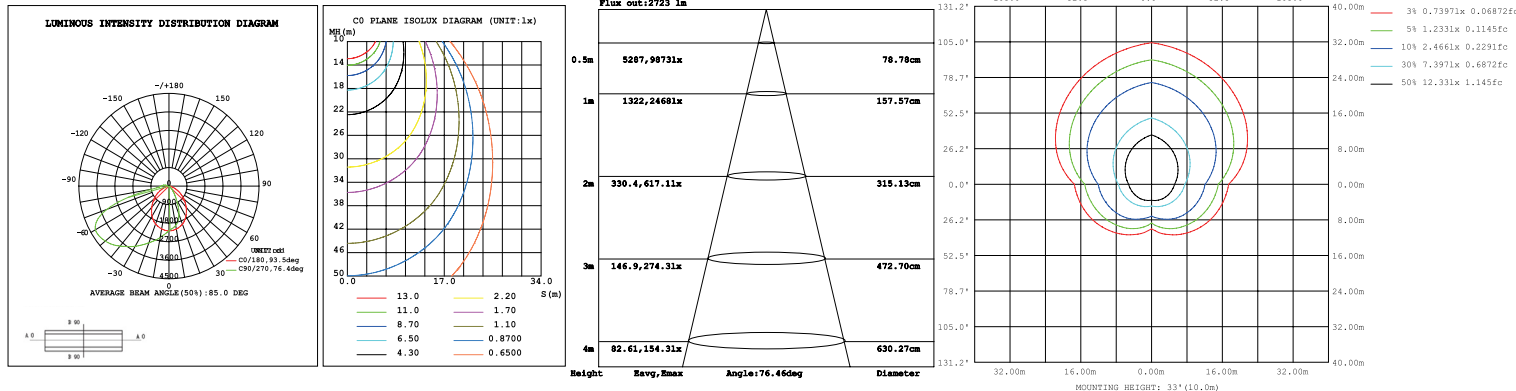


70W-4000K

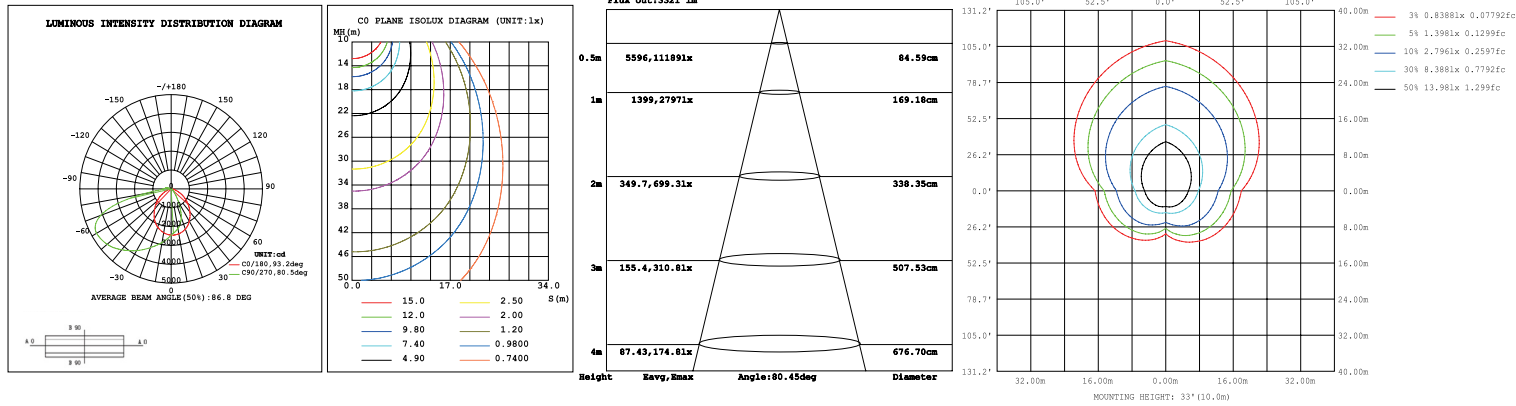

48W-4000K




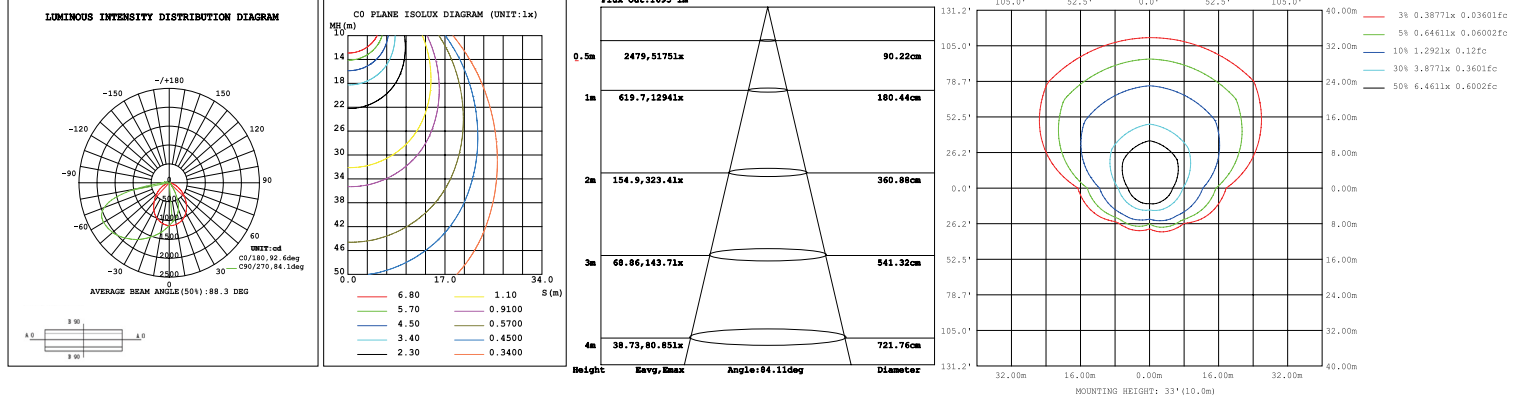


72W-4000K




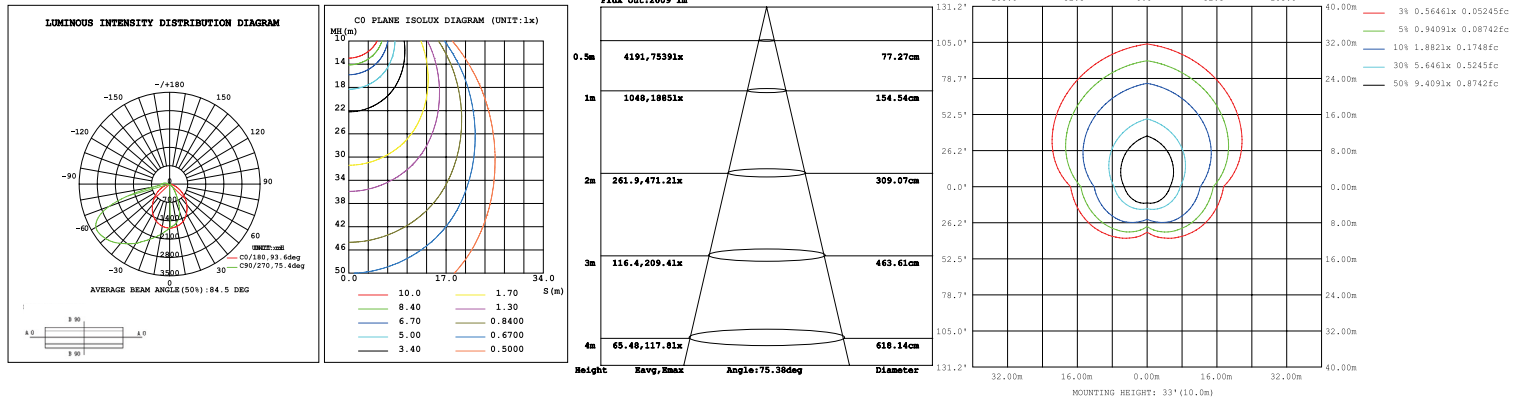




966W-4000K

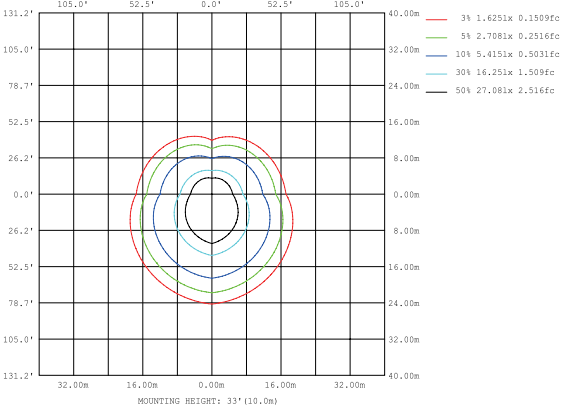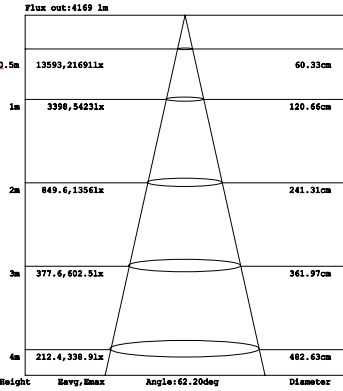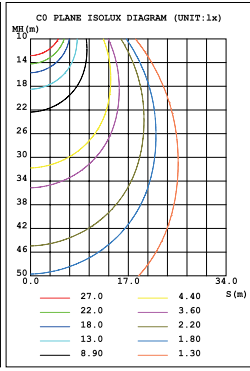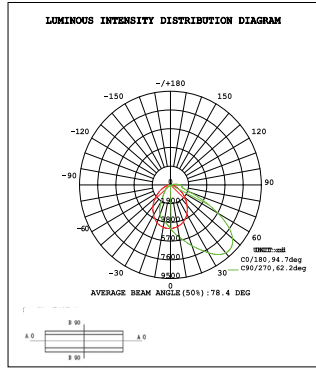

120W-4000K

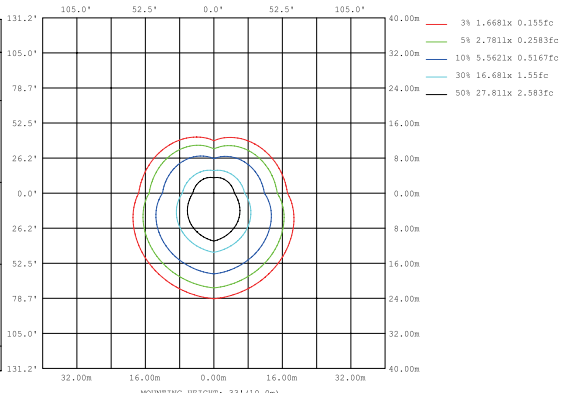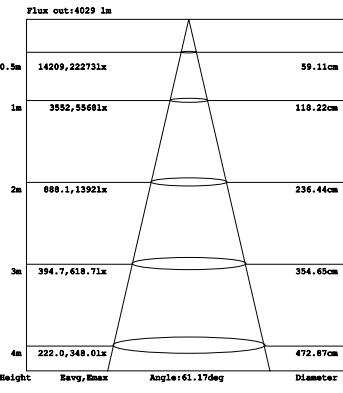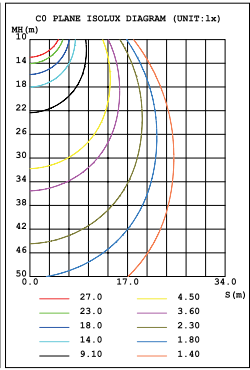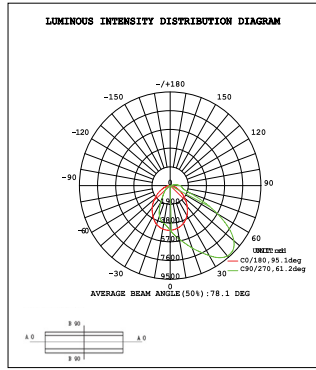



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution
LL-WPLSC-[28][42][56][70]-3CCT-UNV-BZ-PC	28W/42W/56W/70W	4483/5896/7740/9753	3000K 4000K 5000K	120-277	96.3 X 71°
LL-WPLSC-[48][72][96][120]-2CCT-UNV-BZ-PC	48W/72W/96W/120W	7496/10985/14162/17226	4000K 5000K	120-277	95.3 X 62.9°

* Please contact LITELUME for all Custom Option Requests