







Description

The LITELUME™ LED Stairwell Luminaire (LL-SW) is a surface mounted luminaire specifically optimized for use in stairwells, corridors & hallways. Designed for retrofit or new construction, with vandal resistant housing. Equipped with an integrated pir sensor and multiple emergency battery backup options. Featuring 3 level lumen output and 3 color adjustable CCT, allowing for customized energy savings and comfortability.

Fixture Information

Size: 35W/45W/55W

Housing: Aluminum
Lens: Frosted PC

Colors: Standard: White

Mountings: Standard: Wall Mount

Accessories: Emergency Back-up Battery
Sensors Standard: 0-10v PIR sensor

Dimming: Standard: 0-10v continuous, 12Vdc

Operating temperature: -40° F to 104° F

Power factor: .90 CRI: 83

Voltage: Standard: 120-277V
Warranty: 10-Year Limited Warranty

Performance Data

Lumen Output:

4,200 to 6,600 lm

Lumens Per Watt (typical):

120 lm/W

CCT:

3500K

4000K 5000K

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed for Damp Locations









Dimension

Item	Length	Height	Width	Weight	
LL-SW	47.9"	3.9"	3.4"	4.85 lbs	





Control




Emergency Back-up




EM8 - Emergency Battery Back Up, 8W, 90 min EM15 - Emergency Battery Back Up, 15W, 90 min EM20 - Emergency Battery Back Up, 20W, 90 min

Photometrics

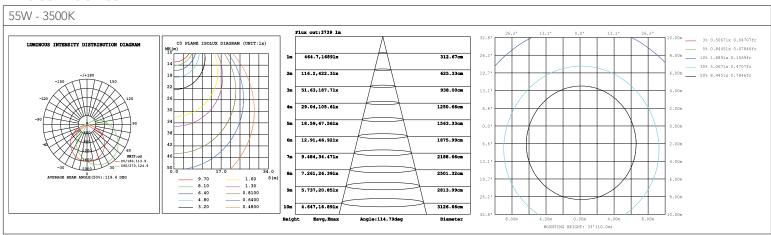



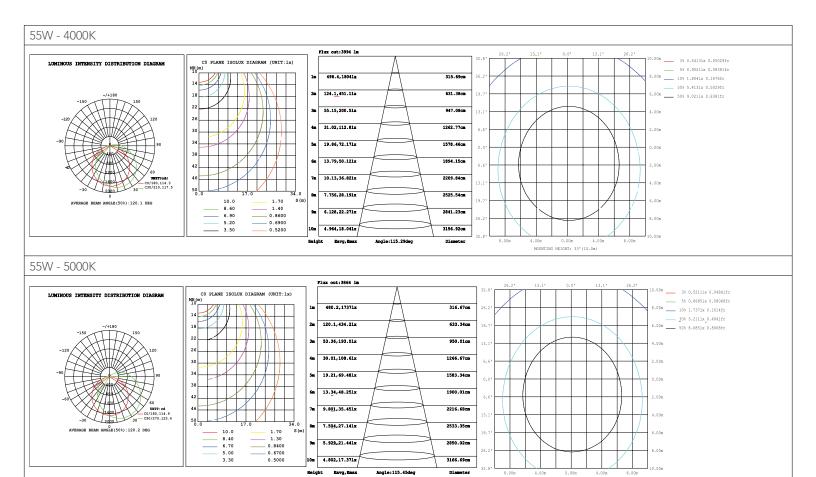



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SW-[35][45][55]-3CCT-UNV	35W 45W 55W	4200/5400/6600	3500K/4000K/5000K	120-277

Accessories Ordering Information

Part #	Description
RC100	Remote Control 100
EM8	Emergency Battery Back Up, 8W, 90 min
EM15	Emergency Battery Back Up, 15W, 90 min
EM20	Emergency Battery Back Up, 20W, 90 min

^{*} Please contact LITELUME for all Custom Option Requests