



Ceiling Now Premium



Description

Description The LITELUME™ Ceiling Now Premium (LL-CNP) Features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic lens for a soft appearance. Available in 3000k, JA8, high power factor and low THD. Applications: commercial, residential, hospitality and entertainment.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	11W/18W/24W/30W/35W
Housing:	Die-formed cold rolled steel Protective powder coat
Finish:	
Color:	Standard: Satin Nickel (SN) Standard: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Ceiling Mount
Lens:	High Transmission Acrylic
CRI:	90
THD:	<10%
Dimming:	Standard: 120V Triac (120 only) Standard: 0-10v Dimming level minimum 3% flicker free (120-277v only)
Power Factor:	.90
Voltage:	Standard: 120V /120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

850 to 3000 lm

Lumens Per Watt (typical):

77 to 85 lm/W

CCT:

3000K

Ratings & Certificates


ETL/cETL Listed
Damp Location Listed
CEC Listed, Meets Title24 JA8 Requirements





Dimension

Item	Diameter (a)	Height (b)
11W	10.4"	4.2"
18W	11.8"	4.2"
24W	14.5"	4.6"
30W	16.0"	4.9"
35W	17.8"	4.9"

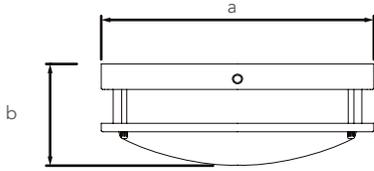



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CNP-11-30-120-SN	11	850	3000	120	Satin Nickel
LL-CNP-11-30-120-ORB	11	850	3000	120	Oil Rubbed Bronze
LL-CNP-18-30-120-SN	18	1200	3000	120	Satin Nickel
LL-CNP-18-30-120-ORB	18	1200	3000	120	Oil Rubbed Bronze
LL-CNP-24-30-UNV-SN	24	2000	3000	120-277	Satin Nickel
LL-CNP-24-30-UNV-ORB	24	2000	3000	120-277	Oil Rubbed Bronze
LL-CNP-30-30-UNV-SN	30	2300	3000	120-277	Satin Nickel
LL-CNP-30-30-UNV-ORB	30	2300	3000	120-277	Oil Rubbed Bronze
LL-CNP-35-30-UNV-SN	35	3000	3000	120-277	Satin Nickel
LL-CNP-35-30-UNV-ORB	35	3000	3000	120-277	Oil Rubbed Bronze