



Pendant Series C



LL-PSC

Pendant Series C

The LITELUME™ LED Pendant Series C (LL-PSC) features a die-formed cold rolled steel housing in satin nickel, black or oil rubbed bronze with a clear glass shade for an elegant soft appearance.



PERFORMANCE DATA

Lumen Output	800 - 2400 lm
Lumens Per Watt (typical)	100 lm/W
CCT	2700k
Lifespan	30,000 hrs

RATINGS & CERTIFICATES

Energy Star • cULus Listed

APPLICATIONS


Dining • Vanity • Bathrooms • Hospitals
Schools • Restaurants • Offices • Hallways
Commercial, Residential & Hospitality

FIXTURE INFORMATION

Size	Housing	Shade	Lamp	Mounting	Color	
8W - 24W	Die-Formed Cold-Rolled Steel	Clear Glass	Omni Directional Filament Dimmable E26 LED Bulb	Ceiling	<ul style="list-style-type: none"> • Black • Satin Nickel • Oil Rubbed Bronze 	
Voltage	Dimming Range	Dimming Protocol	PF	THD	CRI	Warranty
120V	1%	Triac (Leading Edge)	.98	<10%	80	10 Year

DIMENSIONS


1 Lamp

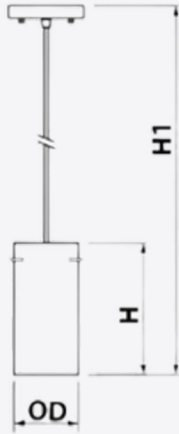

(OD x H x H1)
4.8" x 9.8" x 42.0"

Note: H1- Total Height

3 Lamp

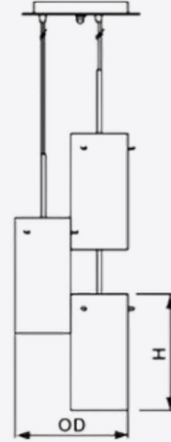

(OD x H x H1)
11.0" x 9.8" x 6'

Note: H1-Hanging Cord Length



PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Lamps	
LL LITELUME	PSC Pendant Series C	1 1 Lamp 3 3 Lamp	
Watts	CCT	Voltage	Color
8 8W 24 24W	27 2700K	120 120V	SN Satin Nickel ORB Oil Rubbed Bronze BK Black

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-PSC-1-8-27-120-SN	8	800	2700	120
LL-PSC-1-8-27-120-BK	8	800	2700	120
LL-PSC-1-8-27-120-ORB	8	800	2700	120
LL-PSC-3-24-27-120-SN	24	2400	2700	120
LL-PSC-3-24-27-120-BK	24	2400	2700	120
LL-PSC-3-24-27-120-ORB	24	2400	2700	120