



# Cylinder Wall Mount Large



## Description

The LITELUME™ LED Cylinder Wall Mount Large (LL-CWML) is a specification grade field adjustable Uplight/Downlight Wall Mounted luminaire designed for retrofit or new construction. Available in 8", and 10" diameters. Includes a photocell with on/off dip switch. Choose between uplight, downlight or up/down combination. Featuring 3 level lumen output and 3 color adjustable CCT, allowing for customized energy savings and comfortability.

Applications: Site, Hallway, Perimeter lighting, Walkway lighting, Multi-Family & Hospitality.

## Fixture Information

Size:	30W/45W/55W/75W/95W/105W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powder coat
Colors:	Standard: Black (BK) Optional: White (WH), Grey (GY)
Mountings:	Standard: Wall Mount
Lens:	Glass
CRI:	80
Power factor:	.90
THD:	<15%
Voltage:	Standard: 120-277V
Dimming:	Standard: 0-10V
Operating Temperature:	-40°F to 104°F
Sensor:	Standard: No sensor
Photocell:	Standard: Photocell with ON/OFF dip switch
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

4,289 to 14,788 lm

### Lumens Per Watt (typical):

140 to 142 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

45°  
75°

### Lifespan:

Up to 100,000 running hours

### Ratings & Certificates


UL Listed For Wet Location





### Dimension

Item	Length	Height	Width
8"	10.7"	13.46"	8"
10"	12.7"	18"	10"

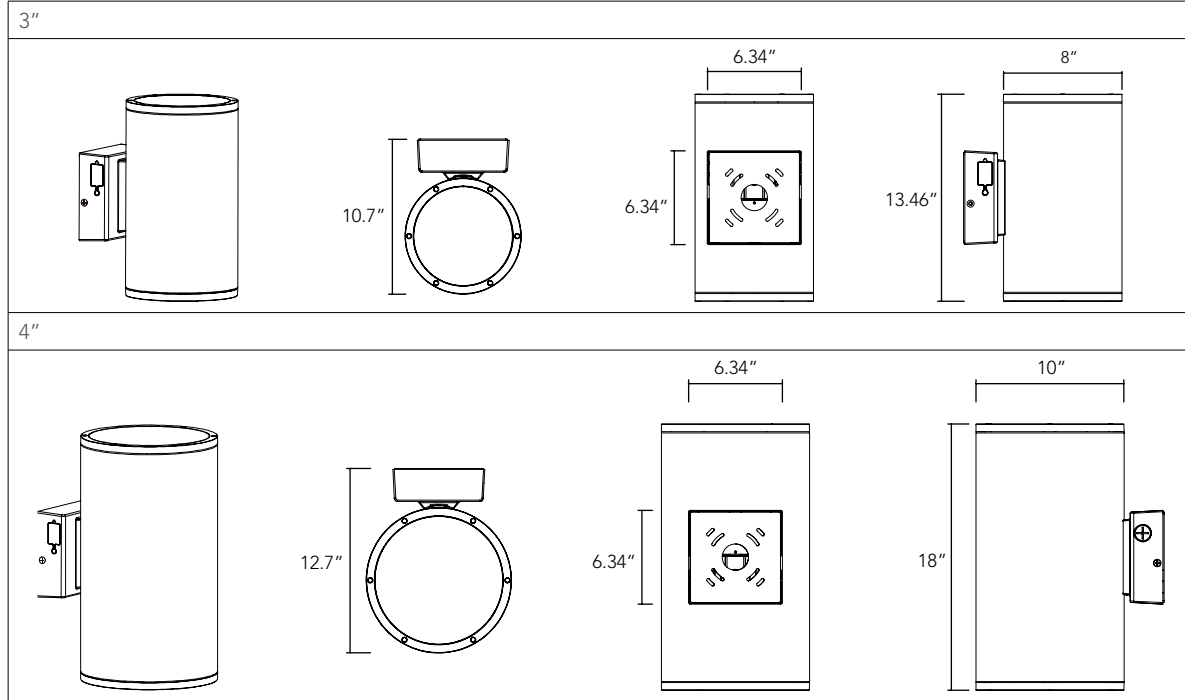




## Uplight/Downlight flux ratio adjustable



- SELECTABLE LUMENS**
- SELECTABLE CCT**
- SELECTABLE DISTRIBUTION**

### Uplight/Downlight flux ratio adjustable

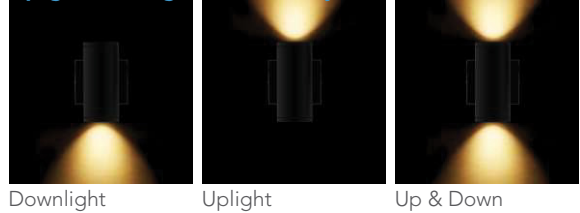



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution	Color
LL-CWML-8-[30][45][55]-3CCT-UNV-45D-BK-PC	30W/45W/55W	4289/6434/7864	3000K 4000K 5000K	120-277	45 DEGREE	Black
LL-CWML-10-[75][95][105]-3CCT-UNV-45D-BK-PC	75W/95W/105W	10562/13379/14788	3000K 4000K 5000K	120-277	45 DEGREE	Black
LL-CWML-8-[30][45][55]-3CCT-UNV-75D-BK-PC	30W/45W/55W	4289/6434/7864	3000K 4000K 5000K	120-277	75 DEGREE	Black
LL-CWML-10-[75][95][105]-3CCT-UNV-75D-BK-PC	75W/95W/105W	10562/13379/14788	3000K 4000K 5000K	120-277	75 DEGREE	Black
LL-CWML-8-[30][45][55]-3CCT-UNV-45D-WH-PC	30W/45W/55W	4289/6434/7864	3000K 4000K 5000K	120-277	45 DEGREE	Black
LL-CWML-10-[75][95][105]-3CCT-UNV-45D-WH-PC	75W/95W/105W	10562/13379/14788	3000K 4000K 5000K	120-277	45 DEGREE	White
LL-CWML-8-[30][45][55]-3CCT-UNV-75D-WH-PC	30W/45W/55W	4289/6434/7864	3000K 4000K 5000K	120-277	75 DEGREE	White
LL-CWML-10-[75][95][105]-3CCT-UNV-75D-WH-PC	75W/95W/105W	10562/13379/14788	3000K 4000K 5000K	120-277	75 DEGREE	White
LL-CWML-8-[30][45][55]-3CCT-UNV-45D-GY-PC	30W/45W/55W	4289/6434/7864	3000K 4000K 5000K	120-277	45 DEGREE	Grey
LL-CWML-10-[75][95][105]-3CCT-UNV-45D-GY-PC	75W/95W/105W	10562/13379/14788	3000K 4000K 5000K	120-277	45 DEGREE	Grey
LL-CWML-8-[30][45][55]-3CCT-UNV-75D-GY-PC	30W/45W/55W	4289/6434/7864	3000K 4000K 5000K	120-277	75 DEGREE	Grey
LL-CWML-10-[75][95][105]-3CCT-UNV-75D-GY-PC	75W/95W/105W	10562/13379/14788	3000K 4000K 5000K	120-277	75 DEGREE	Grey

## Accessories Ordering Information

Part #	Description
CWM-EM-BK	Emergency Battery Back Up For Cylinder Wall Mount Black
CWM-EM-WH	Emergency Battery Back Up For Cylinder Wall Mount White
CWM-EM-GY	Emergency Battery Back Up For Cylinder Wall Mount Gray

\* Please contact LITELUME for all Custom Option Requests