



Wall Pack Quarter Sphere



Description

The Wall Pack Quarter Sphere (LL-WPQS) provides multiple wattages of down light. Featuring high performance LEDs and a long lasting driver, this fixture provides effective lighting all around. It can be used around retail malls, restaurants, dealerships, shopping centers, and hospitality

Fixture Information

Size:	25W/45W/65 SELECTABLE
Housing:	Die cast aluminum body
Lens:	Glass
Finish:	UV Stabilized Powder coated finish
Color:	Standard: Bronze (BZ) Black (BK) White (WH) Grey (GY) Custom options available
CRI:	70+
THD:	20%
Power Factor:	.90
Voltage:	Standard: 120-277V
Operating Temperature:	-40°F to 104°F
Warranty:	10 Year Warranty

Performance Data

Lumen Output:

3362 to 8358 lm

Lumens Per Watt (typical):

120 - 145 lm/W

CCT:

3000K

4000K

5000K

Ratings & Certificates


UL & cUL Listed





Dimensions


Item	Width	Height	Depth
WPQS	18.1"	9.05"	9.05"

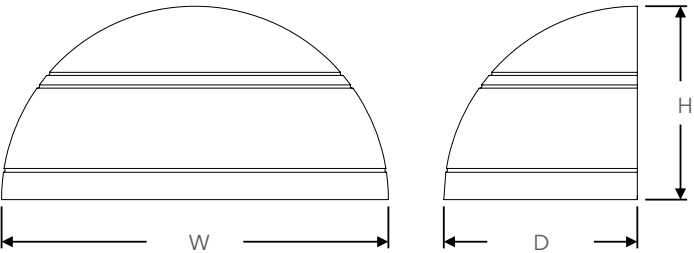

Performance Data

	25W			45W			65W		
CCT	Lumens	Watts	Efficacy	Lumens	Watts	Efficacy	Lumens	Watts	Efficacy
3000K	3362.8	26	130	5788.1	44.2	131	7886.6	64.2	122.9
4000K	3563.8	35.4	140.4	6134.1	43.2	141.9	8358.1	62.7	133.2
5000K	3412.5	26	131.1	5873.7	44.8	132.4	8003.3	64.4	124.4

Photometrics

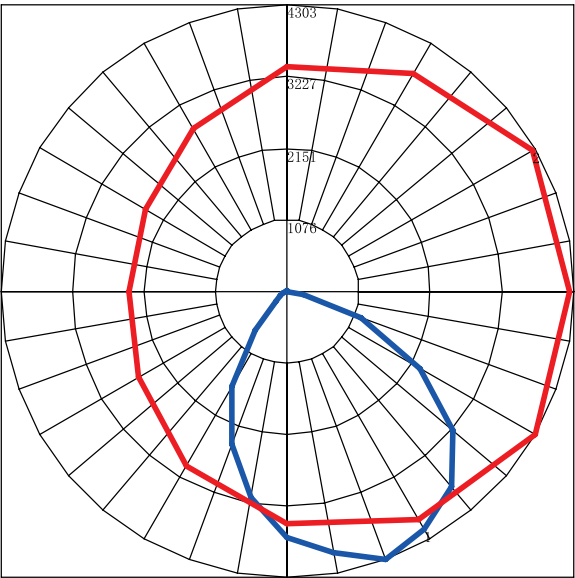



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Finish
LL-WPQS-[25][45][65]-3CCT-UNV-BZ	25W/45W/65W	3563/6134/8358	3000K 4000K 5000K	120-277	Bronze
LL-WPQS-[25][45][65]-3CCT-UNV-BK	25W/45W/65W	3563/6134/8358	3000K 4000K 5000K	120-277	Black
LL-WPQS-[25][45][65]-3CCT-UNV-WH	25W/45W/65W	3563/6134/8358	3000K 4000K 5000K	120-277	White
LL-WPQS-[25][45][65]-3CCT-UNV-GY	25W/45W/65W	3563/6134/8358	3000K 4000K 5000K	120-277	Grey

Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
OC	Occupancy Sensor With Dimming
EM	Emergency Battery Back Up 8W *Title 20 Compliant
EMC7	Emergency Battery Back Up Cold Weather 7W -4 °F To 140°F
EMC15	Emergency Battery Backup Cold Weather 15W -4 °F To 140°F
SS	10kv Surge