



# Post Top Acorn



## Description

The LITELUME™ LED POST TOP ACORN (LL-PTA) features an anti-corrosion, electrostatic polyester powder coated heavy duty die-cast aluminum housing for long-lasting durability. Glare free polycarbonate lens, radiator heat-releasing design and beautiful finished look makes this post top luminaire an excellent choice.

Applications: Municipality, Pathway, Perimeter, Pedestrian and Walkway lighting.

## Fixture Information

Size:	40W/60W/80W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, Black Custom Options: White (WH) and Gray (GY)
Mounting:	Tenon fits 3" standard OD
Power Factor:	.95
CRI:	80
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor Optional: Photocell
Warranty:	10-Year Limited Warranty

## Performance Data

### Lumen Output:

5600 to 9600 lm

### Lumens Per Watt (typical):

120 to 140 lm/W

### CCT:

3000K  
4000K  
5000K

### Distribution:

T5

### Lifespan:

Up to 100,000 running hours

### Ratings & Certificates


ETL Listed for Wet Location  
IP65 Listed






## Dimensions

Item	Diameter	Length
Post Top Acorn	18.11"	39.76"

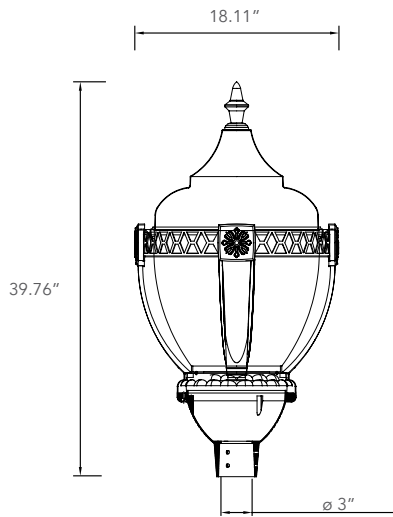

## Photometric Data

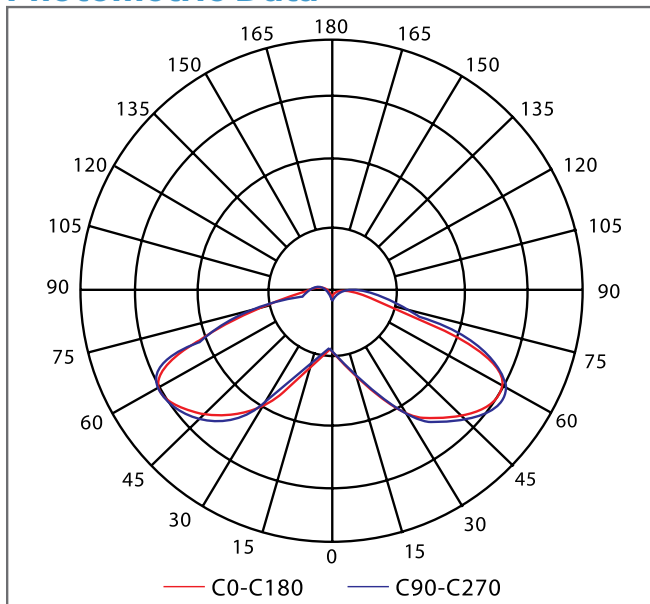



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

## Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Type Distribution
LL-PTA-40/60/80-3CCT-UNV-T5-BZ	40W/60W/ 80W	5600/7800 /9600	3000K/4000K/5000K	120-277	T5
LL-PTA-40/60/80-3CCT-UNV-T5-BK	40W/60W/ 80W	5600/7800 /9600	3000K/4000K/5000K	120-277	T5
LL-PTA-40/60/80-3CCT-UNV-T5-BZ-PC	40W/60W/ 80W	5600/7800 /9600	3000K/4000K/5000K	120-277	T5
LL-PTA-40/60/80-3CCT-UNV-T5-BK-PC	40W/60W/ 80W	5600/7800 /9600	3000K/4000K/5000K	120-277	T5

\* Please contact LITELUME for all Custom Option Requests

## Accessories Ordering Information

Part #	Wattage
SUB "UNV" WITH "480"	480 Volt

\* Please contact LITELUME for all Custom Option Requests