



Vanity Modern Round



Description

The LITELUME™ Vanity Modern Round (LL-VMR) features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic shade for an elegant soft appearance.

Applications: Hallways, Vanity lighting.

Fixture Information

Size:	17W/18W/23W/25W/35W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	90
Power Factor:	.98
THD:	<10%
Dimming:	Standard: Non-Dimming Optional: 0-10v Dimming Optional: Triac Dimming @120v
Voltage:	Standard: 120V /120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1327 to 3040 lm

Lumens Per Watt (typical):

70 to 80 lm/W

CCT:

*3000K
3500K
4000K

Lifespan:

60,000 hrs

Ratings & Certificates


ETL/cETL Listed
*CEC Listed, Meets Title24 JA8 Requirements
Meets JA10 Standard





Dimension

Item	Wide	Depth	Height
17W/18W	25.5"	4.8"	4.5"
23W/25W	37.5"	4.8"	4.5"
35W	49.3"	4.8"	4.0"

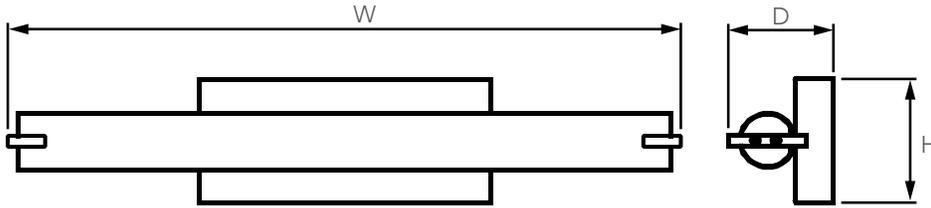



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-VMR-18-30-120-SN	18	1491	3000K	120V	Satin Nickel
LL-VMR-25-30-120-SN	25	1890	3000K	120V	Satin Nickel
LL-VMR-17-3CCT-UNV-SN	17	1520	3000K 4000K 5000K	120-277V	Satin Nickel
LL-VMR-23-3CCT-UNV-SN	23	2110	3000K 4000K 5000K	120-277V	Satin Nickel
LL-VMR-35-3CCT-UNV-SN	35	3220	3000K 4000K 5000K	120-277V	Satin Nickel
LL-VMR-18-30-120-ORB	18	1491	3000K	120V	Oil Rubbed Bronze
LL-VMR-25-30-120-ORB	25	1890	3000K	120V	Oil Rubbed Bronze
LL-VMR-17-3CCT-UNV-ORB	17	1520	3000K 4000K 5000K	120-277V	Oil Rubbed Bronze
LL-VMR-23-3CCT-UNV-ORB	23	2110	3000K 4000K 5000K	120-277V	Oil Rubbed Bronze
LL-VMR-35-3CCT-UNV-ORB	35	3220	3000K 4000K 5000K	120-277V	Oil Rubbed Bronze

* CEC Listed, Meets Title24 JA8 Requirements

Accessories Ordering Information

Part #	Description
DIM	0-10V Dimming
DIMTRIAC	Triac Dimming @ 120V