



Description

High-Power LED Outdoor Polycarbonate Remote Head

Illumination:

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with all inclusive lamp, reflector and lens assembly

Electrical:

- Powered from low voltage (5-15VDC) power source with low voltage wiring (not provided).

Mounting:

- Universal mounting adapter plate included. Mounts to single gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

Housing:


- Available in engineering grade, Impact-resistant polycarbonate housing
- Sealed and gasketed in standard gray or black finish.

Warranty/Listing:

- Seven year warranty.
- UL Listed for damp locations (0°C – 50°C).
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



Dimensions:

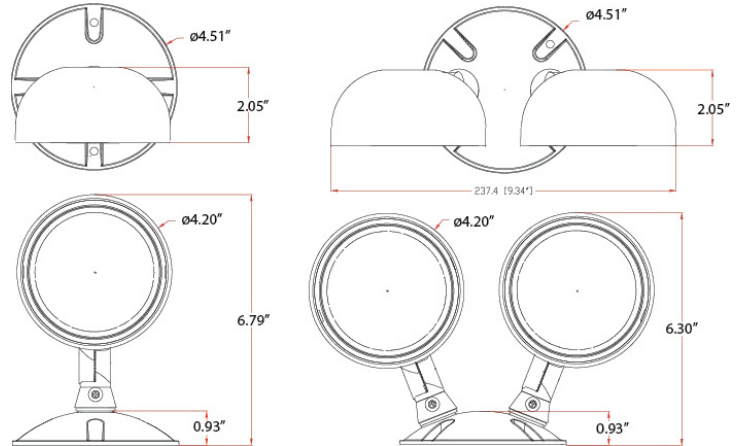

Fixture Compatibility Chart:

Reference individual unit equipment specification sheets for remote load capacity availability.

LL-CALEDXCXTE-RC	LL-CWLEZXTE-RC	LL-INDCWLEZ
LL-HLCWLEZ	LL-LESDXR627	LL-HLEMR
LL-INDEMRR	LL-NYDXR	LL-RMR-16-65/125
LL-LEDXR		



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	Heads		Color		Housing	
LL-HPRL-WP	1 2	Single Double	(blank) B	Gray Black	WP	Polycarbonate (standard)