



Vanity Modern Open



Description

The LITELUME™ Vanity Modern Open (LL-VMO) features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic shade for an elegant soft appearance.

Applications: Hallways, Vanity lighting

Fixture Information

Size:	15W/22W/32W
Housing:	Die-formed cold rolled steel
Finish:	Protective powdercoat
Color:	Standard: Satin Nickel (SN) Optional: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	90
Power Factor:	.98
Dimming:	Standard: Non-Dimming Optional: 0-10v Dimming Optional: Triac Dimming @120V
THD:	<10%
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1500 to 3000 lm

Lumens Per Watt (typical):

100 lm/W

CCT:

3000K
3500K
4000K

Lifespan:

60,000 running hours

Ratings & Certificates


ETL/cETL Listed
CEC Listed, Meets Title24 JA8 Requirements





Dimension

Item	Depth	Width	Height
15W	3.7"	24"	4.3"
22W	3.7"	36"	4.3"
32W	3.7"	48"	4.3"

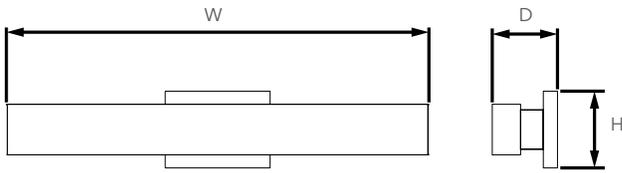



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-VMO-15-3CCT-UNV-SN	15	1500	3000K/3500K/4000K	120-277V
LL-VMO-15-3CCT-UNV-ORB	15	1500	3000K/3500K/4000K	120-277V
LL-VMO-22-3CCT-UNV-SN	22	1900	3000K/3500K/4000K	120-277V
LL-VMO-22-3CCT-UNV-ORB	22	1900	3000K/3500K/4000K	120-277V
LL-VMO-32-3CCT-UNV-SN	32	3000	3000K/3500K/4000K	120-277V
LL-VMO-32-3CCT-UNV-ORB	32	3000	3000K/3500K/4000K	120-277V

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
DIM	0-10V Dimming
DIMTRIAC	Triac Dimming @ 120V