




LED Linear Wall Wash

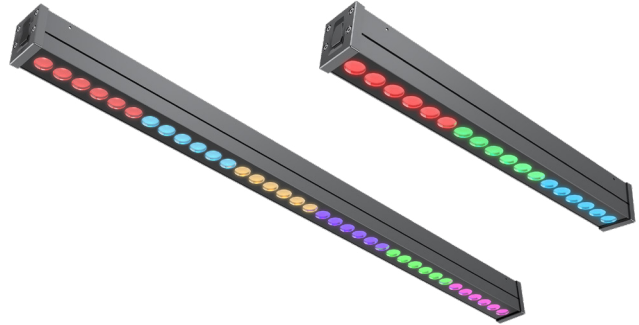

Description

The LITELUME™ LED Linear Wall Wash (LL-FL56) is used for landscape lighting, building facade, billboards, bridges and custom designs. The fixture provides single white, RGB and RGBW, as well as DALI dimming and DMX control functions to ensure normal use in various situations. Multiple beam angles, wattages and mounting options available.

Fixture Information

Size:	18W/36W
Housing:	Aluminum Alloy
Finish:	Powder Coating
Color:	Black
Mounting:	Bracket Mount Ceiling Mount Suspended Mount
Lens:	Polycarbonate Optical Lens, Glass
Voltage:	Standard: 120-277V
Operating Temperature:	-20°C to + 45°C(-4°F to 113°F)
Power Factor:	>.9
CRI:	80
Surge Protector:	1kV line-line, 2kV line-earth
Dimming:	0-10V DMX
Warranty:	10-Years Warranty

Performance Data

Lumen Output:

1,800 to 3,600 lm

Lumens Per Watt (typical):

100 lm/W

CCT:

4000K (2200K, 3000K, 5000K optional)

RGB (R:620-630nm, G:520-530nm, B:470-480nm)

RGBW (R:620-630nm, G:520-530nm, B:470-480nm,
W:4000K)

Ratings & Certificates

ETL Listed

IP66




Intertek




Dimensions

Item	Width	Length	Height
18W	4.76"	20.00"	3.11"
36W	4.76"	39.29"	3.11"

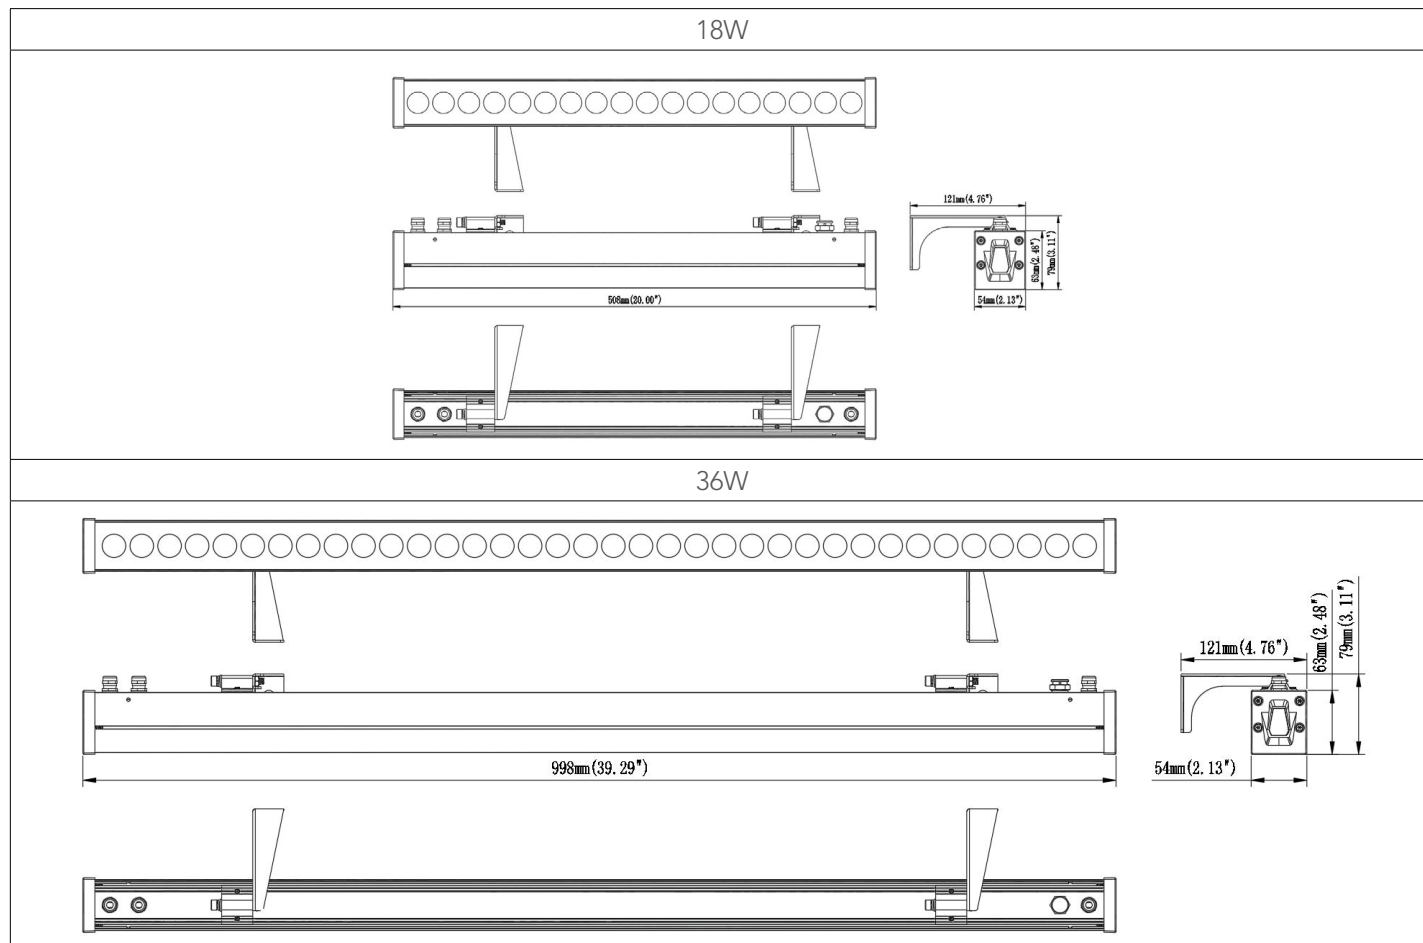


Photometrics

For Single White

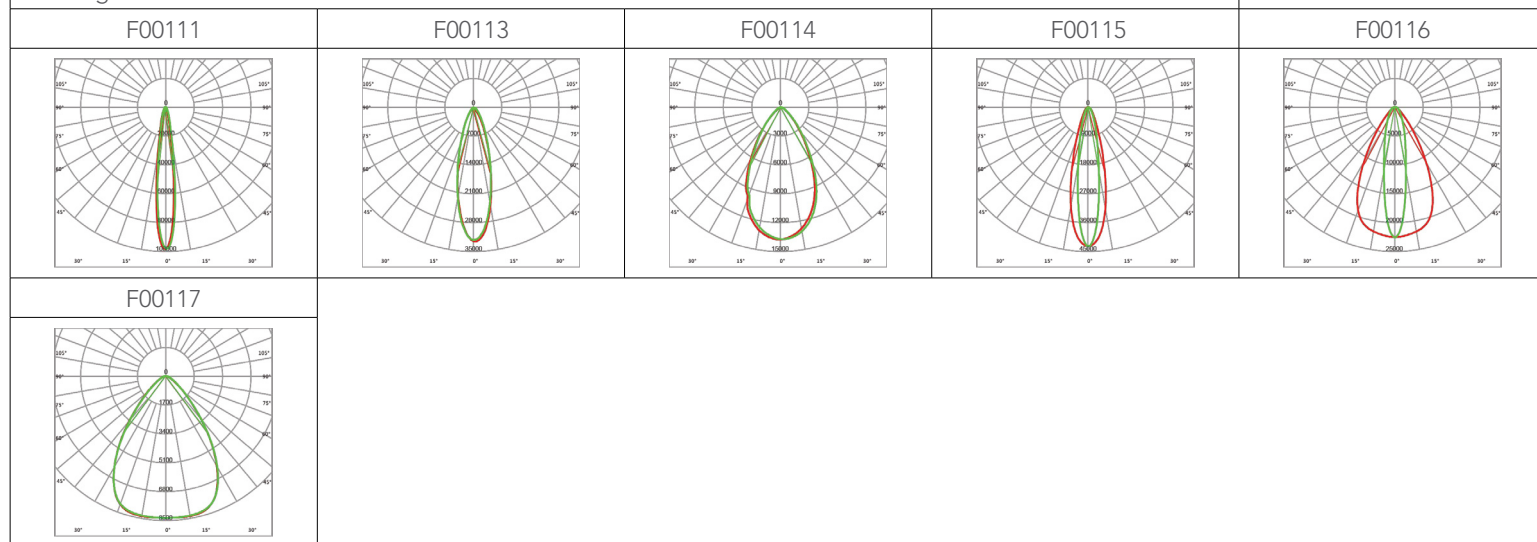



For RGB/RGBW

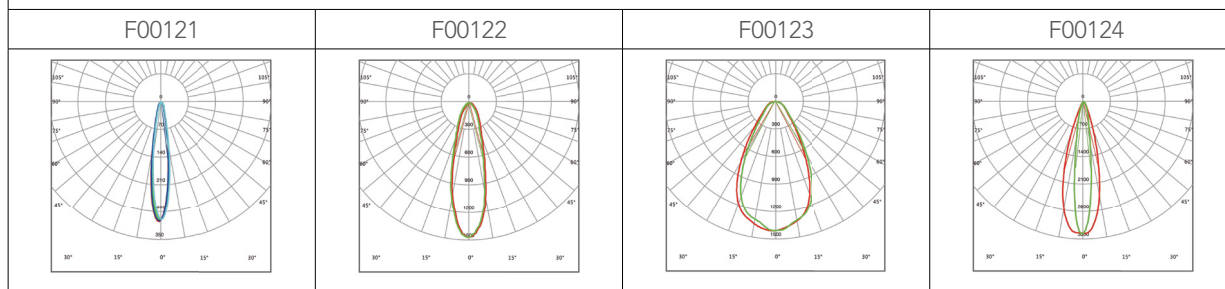


Mounting

L-Bracket		
LL-BC-F56-03	LL-BC-F56-04	LL-BC-F56-05
Ceiling Mount		
LL-BC-F56-06	LL-BC-F56-07	LL-BC-F56-08
Suspended Mount		
LL-BC-F56-10	LL-BC-F56-11	

Accessories

Visor		Anti-Glare Film
LL-BC-F56-01	LL-BC-F56-02	LL-AG-F56-02

Image shown with LL-DMXcas-JB installed

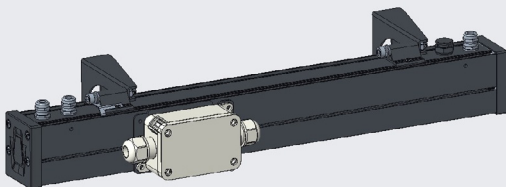



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Dimming
LL-FL56-18-40-UNV-010	18	1800	4000	120-277	0-10V
LL-FL56-36-40-UNV-010	36	3600	4000	120-277	0-10V
LL-FL56-18-40-UNV-DMX	18	1800	4000	120-277	DMX
LL-FL56-36-40-UNV-DMX	36	3600	4000	120-277	DMX
LL-FL56-18-RGB-UNV-DMX	18	NA	RGB	120-277	DMX
LL-FL56-36-RGB-UNV-DMX	36	NA	RGB	120-277	DMX
LL-FL56-18-RGBW-UNV-DMX	18	NA	RGBW	120-277	DMX
LL-FL56-36-RGBW-UNV-DMX	36	NA	RGBW	120-277	DMX

* Please contact LITELUME for all Custom Option Requests

Beam Angle

Part #	Degrees
F00111	12°
F00113	30°
F00114	60°
F00115	15x30°
F00116	20x60°
F00117	75°
F00118	8°
F00121	15° for RGB/RGBW
F00122	25° for RGB/RGBW
F00123	15x30° for RGB/RGBW
F00124	60° for RGB/RGBW

Mounting Option

Part #	Description
LL-BC-F56-03	L Bracket (3.93")
LL-BC-F56-04	L Bracket (5.51")
LL-BC-F56-05	L Bracket (7.08")
LL-BC-F56-06	Ceiling Mount Bracket (2.36")
LL-BC-F56-07	Ceiling Mount Bracket (4.72")
LL-BC-F56-08	Ceiling Mount Bracket (7.08")
LL-BC-F56-10	Suspension Kit
LL-BC-F56-11	Suspension Kit
LL-DMXcas-JB	DMX-to-Casambi 8-Channel DMX Dimmer with Casambi CBM003 Long Range Radio in Evolution Mode installed in externally mounted IP66 junction box
LL-CK-F39-01	DMX Termination Resistor
LL-04-05-02000-300	Male Connector For RGB(W)



Accessories

Part #	Description
LL-BC-F56-01	Visor for 18W
LL-BC-F56-02	Visor for 36W
LL-AG-F56-02	Anti-Glare film