



Canopy Slim Premium



Description

The LITELUME™ LED Canopy Slim premium (LL-CSLP) Specification grade luminaire incorporates a low profile design with aesthetically pleasing appearance. Die-cast aluminum construction and shatter-resistant high impact polycarbonate acrylic optical lens with UV stabilizers. Modern symmetry making this luminaire ideal for walkways, parking garages, entrance ways, and overall canopy applications.

Fixture Information

Size:	14W/18W/26W/35W/38W/43W/ 49W/52W/60W/73W/83W
Housing:	Die-cast Aluminum
Finish:	Protective powdercoat
Color:	Standard: Bronze (BZ)
Mounting:	Standard: Ceiling
Lens:	Polycarbonate
Voltage:	Standard: 120-277V
CRI:	80
THD:	<20%
Surge Protector:	Optional 10kVA
Dimming:	Standard 0-10v continous
Sensor:	Standard: No sensor Optional: Internal Dimming Microwave Sensor Optional: Photocell
Operating Temperature:	-40°F-104°F
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3,800 to 16,000 lm

Lumens Per Watt (typical):

136 lm/W

CCT:

3000K
4000K
5000K

Lifespan:

70,000 Hours based on IES LM80 results & TM21 calculations

Ratings & Certificates


UL Listed For Wet Location
IP66






Dimension

Item	Width	Length	Height 1	Height 2
LL-CSLP-6L	8.8"	8.8"	3.3"	3.8"
LL-CSLP-8L	10.6"	10.6"	3.7"	4.2"
LL-CSLP-11L	12.8"	12.8"	3.85"	4.4"

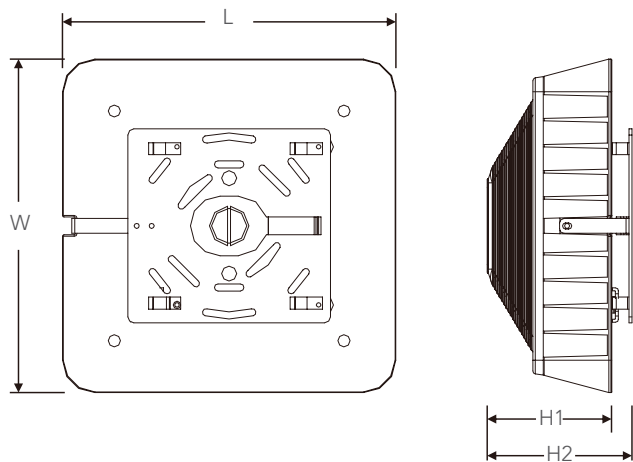

Features:

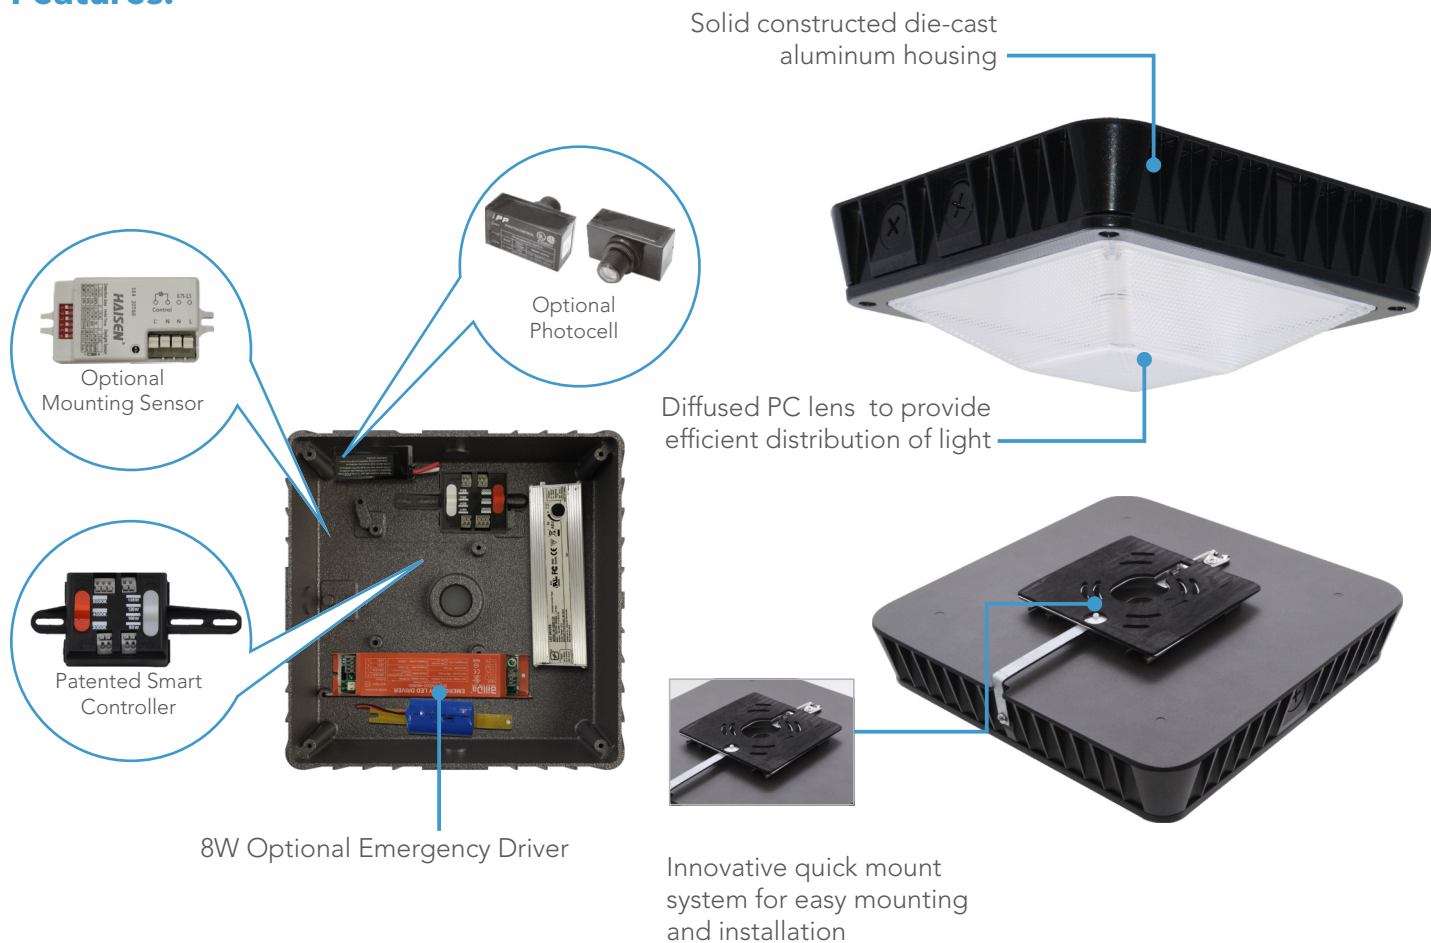



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Lumen Package		Voltage		CCT		Power		Finish	
LL	LITELUME	CSLP	Canopy Slim Premium	6L	5848 Lumens	UNV	120-277V	SCT	Selectable color temperature *	SP	Selectable Power	BZ	Bronze
				8L	8160 Lumens								
				11L	11288 Lumens								

Photocell		Emergency Battery		Accessories	
PC	Photocell	EM8	Emergency battery backup 8W **	HD401V	Haisen 120-277V Dimming Microwave Motion Sensor
				HD05R	Haisen Universal smart remote control
				SP10KVA	Surge protector 10kVA

* SCT Selectable color temperature 3000k/4000k/5000k

** 8L & 11L models only

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-CSLP-6L-UNV-SCT-SP-BZ	14W/26W/38W/43W	1904/3536/5168/5848	3000K 4000K 5000K	120-277
LL-CSLP-8L-UNV-SCT-SP-BZ	18W/35W/52W/60W	2448/4760/7072/8160	3000K 4000K 5000K	120-277
LL-CSLP-11L-UNV-SCT-SP-BZ	26W/49W/73W/83W	3536/6664/9928/11288	3000K 4000K 5000K	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
PC	Button Photocell, 120-277V
EM8	Emergency Battery Back Up 8W **8L & 11L Models Only**
HD401V	Haisen 120-277V Dimming Microwave Motion Sensor
HD05R	Haisen Universal Smart Remote Control
SP10KVA	Surge Protector 10kVA