

Wall Pack Half Round Up/Down













Description

The Wall Pack Half Round Up/Down (LL-WPHRUD) is elegant as it is functional. Providing 40W of total light up and down. Featuring high performance LEDs and a long lasting driver, this fixture provides effective lighting all around. It can be used around retail malls, restaurants, dealerships, shopping centers, and hospitality.

Fixture Information

Size: 25W/45W/65W

Distribution: 33% Uplight / 66% Downlight
Housing: Die cast aluminum body

Lens Glass

Finish: UV Stabilized Powder coated finish

Color: Standard: Bronze (BZ)

Black (BK) White (WH) Grey (GY)

Custom options available

CRI: 80
THD: <20%
Power Factor: .90

Dimming: Standard 0-10V

Voltage: Standard: 120-277V

Operating Temperature: -40°F to 104°F

Warranty: 10 Year Warranty

Performance Data

Lumen Output:

3,945 to 10,258 lm

Lumens Per Watt (typical):

157 lm/W

3000K 4000K 5000K

Ratings & Certificates


UL & cUL Listed






Dimensions

| Item | Depth | Height | Width |
|-------------|-------|--------|-------|
| 25W/45W/65W | 9.25" | 7.1" | 18.1" |



Photometrics

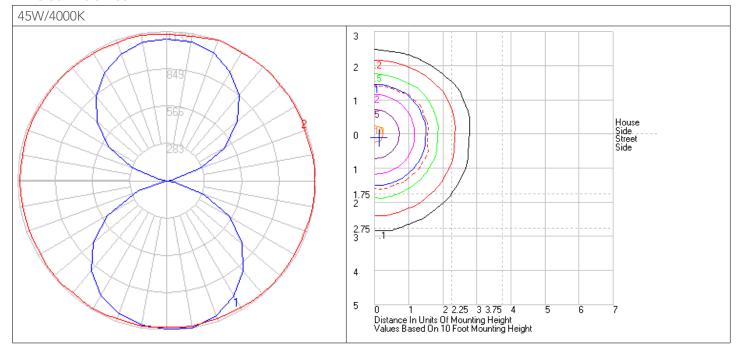



| Project Name | |
|--------------|--|
| Catalog # | |
| Job Type | |
| Prepared By | |
| Notes | |

Fixture Ordering Information

| Part # | Wattage | Lumens | Kelvin | Voltage | Finish |
|------------------------------------|-------------|-----------------|-------------------|---------|--------|
| LL-WPHRUD-[25][45][65]-3CCT-UNV-BZ | 25W/45W/65W | 3945/7101/10258 | 3000K 4000K 5000K | 120-277 | Bronze |
| LL-WPHRUD-[25][45][65]-3CCT-UNV-BK | 25W/45W/65W | 3945/7101/10258 | 3000K 4000K 5000K | 120-277 | Black |
| LL-WPHRUD-[25][45][65]-3CCT-UNV-WH | 25W/45W/65W | 3945/7101/10258 | 3000K 4000K 5000K | 120-277 | White |
| LL-WPHRUD-[25][45][65]-3CCT-UNV-GY | 25W/45W/65W | 3945/7101/10258 | 3000K 4000K 5000K | 120-277 | Gray |

Accessories Ordering Information

| Accessories of doring information | | |
|-----------------------------------|--|--|
| Part # | Description | |
| PC | Button Photocell, 120-277V | |
| OC | Occupancy Sensor | |
| EM | Emergency Battery Back Up 8W *Title 20 Compliant | |
| EMC7 | Emergency Battery Back Up Cold Weather 7W -4 °F To 140°F | |
| EMC15 | Emergency Battery Backup Cold Weather 15W -4 °F To 140°F | |
| SS | 10KV Surge | |