



Wallpack Trapazoid Full Cutoff



Description

The LITELUME™ Wallpack Trapazoid Full Cutoff (LL-WPTFC) is an aesthetically pleasing spec grade design featuring a die-cast aluminum housing with a clear PC lens for long-lasting durability. Field adjustable light engine, CCT and Wattage Selectable.

Applications: Entryways, Pathway, Perimeter and Security lighting.

Fixture Information

Size:	28W/42W/50W/56W/70W/76W/ 100W/125W
Housing:	Die-cast Aluminum
Finish:	Protective powdercoat
Color:	Standard: Bronze (BZ) Custom Options: Black (BK) White (WH) Gray (GY)
Mounting:	Standard: Wall mount
Lens:	UV resistant polycarbonate
Power Factor:	.90
CRI:	80
THD:	<20%
Operating Temperature:	-40°F to 113°F
Voltage:	Standard: 120-277V
Dimming:	Standard 0-10V
Sensor:	Standard: Photocell with cap Optional: Sharkward 0-10v PIR sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

4,400 to 19,000 lm

Lumens Per Watt (typical):

137-157 lm/W

CCT:

3000K
4000K
5000K

Lifespan:

70,000 Hours based on IES LM80 results & TM21
calculations

Ratings & Certificates


UL Listed For Wet Location
TAA Compliant/BAA Optional





Dimension

Item	Width	Depth	Height	Weight
11L	14.2"	8.7"	9.2"	7.21 lbs
19L	14.2"	8.7"	9.2"	7.68 lbs

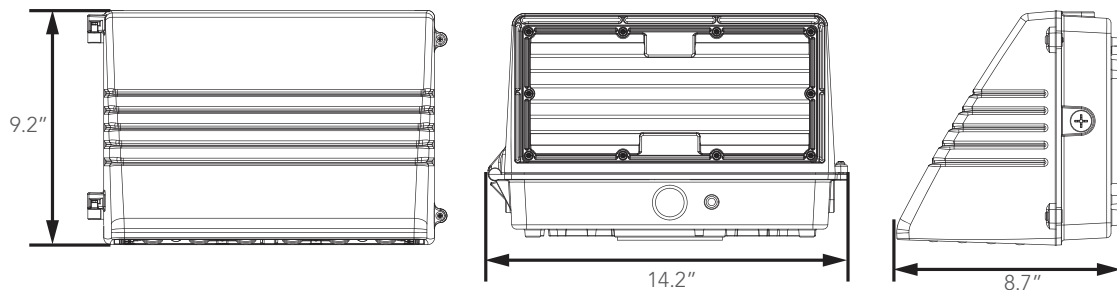


Features:





Photometrics

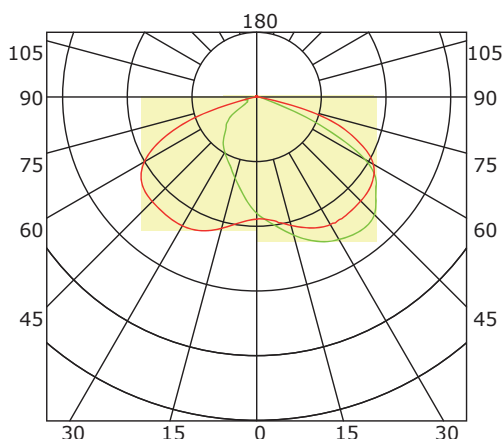

CCT and Wattage Adjustable

LL-WPTFC-11L

Switch Setting	System Watts	CRI	3000K		4000K		5000K	
			Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	70W	70	9800 lms	140 lm/W	11000 lms	157 lm/W	10200 lms	146 lm/W
80%	56W	70	8200 lms	146 lm/W	9100 lms	163 lm/W	8700 lms	155 lm/W
60%	42W	70	6400 lms	152 lm/W	7000 lms	167 lm/W	6800 lms	162 lm/W
40%	28W	70	4400 lms	157 lm/W	4800 lms	171 lm/W	4700 lms	168 lm/W

LL-WPTFC-19L

Switch Setting	System Watts	CRI	3000K		4000K		5000K	
			Lumens	LPW	Lumens	LPW	Lumens	LPW
100%	125W	70	17100 lms	137 lm/W	19000 lms	152 lm/W	18000 lms	144 lm/W
80%	100W	70	14200 lms	142 lm/W	15700 lms	157 lm/W	15000 lms	150 lm/W
60%	75W	70	11000 lms	147 lm/W	12100 lms	161 lm/W	11700 lms	156 lm/W
40%	50W	70	7600 lms	152 lm/W	8200 lms	164 lm/W	8100 lms	162 lm/W



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Lumen Package		Voltage		CCT		Power		Finish	
LL	LITELUME	WPTFC	Wallpack Trapazoid Full Cutoff	11L	11000 Lumens	UNV	120-277V	SCT	Selectable color temperature *	SP	Selectable Power	BZ	Bronze
				19L	19000 Lumens							BK	Black
												WH	White
												GY	Gray
												CUS	Custom

Photocell		Emergency Battery		Accessories	
PC	Photocell with cap	EM8	Emergency battery backup 8w **	BRI823-B-D	Sharkward 120-277v 0-10v PIR sensor
				RC100	Remote control 100
				BAAWPTFC	Buy American act compliant

* SCT Selectable color temperature 3000K/4000K/5000K

** 11L model only

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution
LL-WPTFC-11L-UNV-SCT-SP-BZ-PC	28W/42W/56W/70W	4800/7000/9000/11000	3000K 4000K 5000K	120-277	Type 3 Wide
LL-WPTFC-19L-UNV-SCT-SP-BZ-PC	50W/75W/100W/125W	8200/12100/15700/19000	3000K 4000K 5000K	120-277	Type 3 Wide

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
EM8	Emergency Battery Backup 8W **11L MODEL ONLY**
BAA-WPTFC	Buy American Act Compliant For Wallpack Trapazoid Full Cutoff