



## Description

LED NEMA4X/NSF Remote Head

## Illumination:

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

## Electrical:

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

## Mounting:

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Distane of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

## Housing:

- Housing is reinforced polycarbonate construction in white, gray or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.

## Options:



- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

## Warranty/Listing:

- Seven year warranty.
- UL listed with approved Litelume products
- IP66 rated for Ingress protection.
- NEMA4X rated.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL certified for use in food service operations.



## Dimensions:

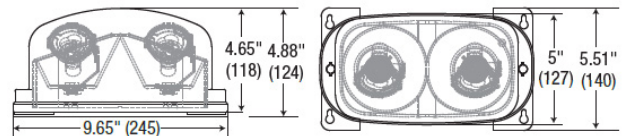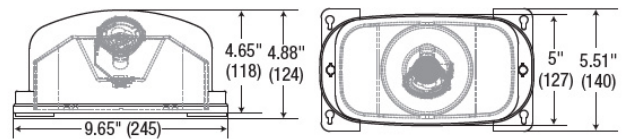

## Fixture Compatibility Chart:

Reference individual unit equipment specification sheets for remote load capacity availability.

LL-CADXR	LL-CALEDXCXTE	LL-CAR
LL-CWLEDZXTE-RC	LL-DXR	LL-LEDSDXR
LL-LEDTFX-2	LL-NYDXR	LL-RMR-16-65/125



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Model	Heads		Housing Color		Options	
LL-INDRHLED15	1 2	Single Twin	W B G	White Black Grey	TP	Tamper-Proof