



Highbay Linear Full Body



LL-HBLFB

Highbay Linear Full Body

The LITELUME™ High Bay Linear Full Body (LL-HBLFB) features a one-piece rugged die-cast aluminum housing to enable a sturdy structure and superior thermal performance. Full body premium design and polycarbonate prismatic lens.



PERFORMANCE DATA

Lumen Output	12,000 - 60,000 lm
Lumens Per Watt (typical)	160 lm/W
CCT - Field Selectable	4000K 5000K
Lifespan	135,000 hrs (L70) 41,000 hrs (L90)

RATINGS & CERTIFICATES

cULus Listed • Damp Location
FCC Part 15, Class A

APPLICATIONS

High Lumen Applications • Supermarkets
Gymnasiums • Sports Facilities • Factories
Stadiums • Exhibition Halls • Warehouses

FIXTURE INFORMATION


Size	Housing	Finish	Optics	Mounting
82W - 398W	Die Cast Aluminum	Premium White Powder Coat	- CRI > 80% - Polycarbonate Prismatic Lens	- Standard: Chain Mount Kit (v-hooks and 1m chain included) - Optional: Surface Mount Kit for Solid Surfaces * - Optional: Pendant Mount Kit for 1/2" Rigid Conduit * - Optional: Cable Suspension Kit
Electrical			Voltage	Operating Temperature
- Standard: 0-10V Dimming - Optional: Emergency Driver			- Standard: 120 - 277V - Optional: 347 - 480V (via step-down transformer)	-40°F to 131°F for LL-HBLFB-18L/24L -40°F to 122°F for LL-HBLFB-36L/60L

* Surface Mount Kit and Pendant Mount Kit are not compatible with the 480V StepDown Transformer option, or the on-board, factory installed EM driver option.



Highbay Linear Full Body

DIMENSIONS

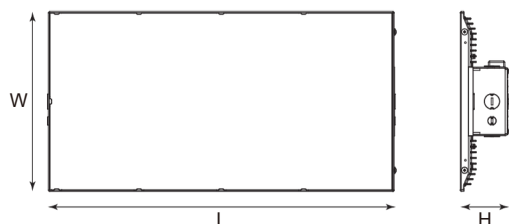

Model	L (in)	W (in)	H (in)	Weight (lbs)
LL-HBLFB-18L	13.0	9.5	2.2	3.7
LL-HBLFB-24L	14.2	10.25	2.4	4.5
LL-HBLFB-36L	19.7	10.25	2.6	6.5
LL-HBLFB-60L	30.7	11.0	2.6	9.25

LUMEN TABLES

Model	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
LL-HBLFB-18L	Lumens	12,454	12,245	15,387	14,987	18,260	17,662
	Watt	81.57	82.68	103.79	105.72	127.33	130.36
	Efficacy	153	148	148	142	143	135
Model	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
LL-HBLFB-24L	Lumens	15,480	15,446	18,164	17,944	23,772	23,381
	Watt	97.5	98.69	116.37	117.96	158.16	161.41
	Efficacy	159	157	156	152	150	145
Model	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
LL-HBLFB-36L	Lumens	24,204	24,004	29,825	29,339	35,415	34,727
	Watt	151.23	154.24	192.09	196.72	235.36	242.2
	Efficacy	160	156	155	149	150	143
Model	Measurements	Low Lumens		Mid Lumens		High Lumens	
		4000K	5000K	4000K	5000K	4000K	5000K
LL-HBLFB-60L	Lumens	36,167	36,380	47,698	47,582	59,177	58,715
	Watt	224.7	228	305.1	309.5	389.6	397.7
	Efficacy	161	160	156	154	152	148



Highbay Linear Full Body

ELECTRICAL DATA

Model	CCT	Input Amps (A)								
		Low Lumens			Mid Lumens			High Lumens		
		120V	240V	277V	120V	240V	277V	120V	240V	277V
LL-HBLFB-18L	4000K	0.68	0.34	0.29	0.86	0.43	0.37	1.06	0.53	0.46
	5000K	0.69	0.34	0.30	0.88	0.44	0.38	1.09	0.54	0.47
Model	CCT	Input Amps (A)								
		Low Lumens			Mid Lumens			High Lumens		
		120V	240V	277V	120V	240V	277V	120V	240V	277V
LL-HBLFB-24L	4000K	0.81	0.41	0.35	0.97	0.48	0.42	1.32	0.66	0.57
	5000K	0.82	0.41	0.36	0.98	0.49	0.43	1.35	0.67	0.58
Model	CCT	Input Amps (A)								
		Low Lumens			Mid Lumens			High Lumens		
		120V	240V	277V	120V	240V	277V	120V	240V	277V
LL-HBLFB-36L	4000K	1.26	0.63	0.55	1.60	0.80	0.69	1.96	0.98	0.85
	5000K	1.29	0.64	0.56	1.64	0.82	0.71	2.02	1.01	0.87
Model	CCT	Input Amps (A)								
		Low Lumens			Mid Lumens			High Lumens		
		120V	240V	277V	120V	240V	277V	120V	240V	277V
LL-HBLFB-60L	4000K	1.87	0.94	0.81	2.54	1.27	1.10	3.25	1.62	1.41
	5000K	1.90	0.95	0.82	2.58	1.29	1.12	3.31	1.66	1.44




Highbay Linear Full Body

PHOTOMETRICS (LL-HBLFB-18L)

Luminaire Data	
Description	LL-HBLFB-18L
Total Lumens	17,662
Input Wattage	130
Efficacy (lm/W)	135
Spacing Criterion (0-180°)	1.26
Spacing Criterion (90-270°)	1.24

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	3,042	17.2%
0-30°	6,475	36.7%
0-40°	10,520	59.6%
20-50°	10,813	61.2%
40-70°	6,271	35.5%
0-60°	15,726	89.0%
0-80°	17,425	98.7%
0-90°	17,638	99.9%
90-180°	24	0.1%
0-180°	17,662	100.0%

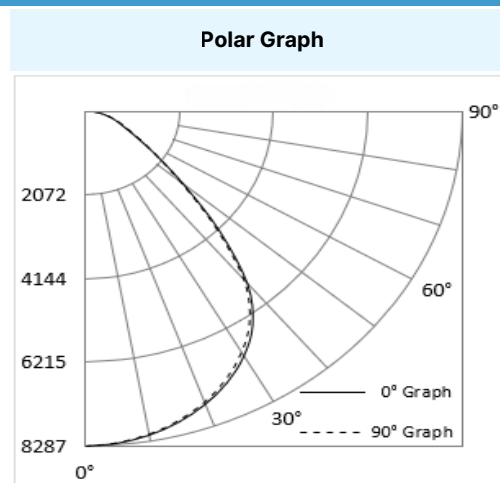


Photometric calculated at 5000K & highest lumen setting.

PHOTOMETRICS (LL-HBLFB-24L)

Luminaire Data	
Description	LL-HBLFB-24L
Total Lumens	23,381
Input Wattage	161
Efficacy (lm/W)	145
Spacing Criterion (0-180°)	1.26
Spacing Criterion (90-270°)	1.28

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	4,016	17.2%
0-30°	8,550	36.6%
0-40°	13,901	59.5%
20-50°	14,322	61.3%
40-70°	8,341	35.7%
0-60°	20,833	89.1%
0-80°	23,074	98.7%
0-90°	23,350	99.9%
90-180°	31	0.1%
0-180°	23,381	100.0%

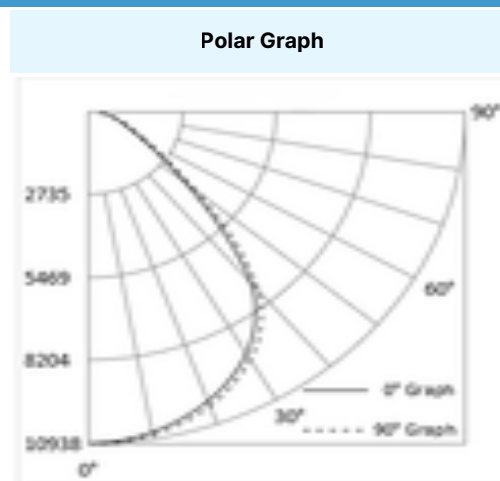

Photometric calculated at 5000K & highest lumen setting.




Highbay Linear Full Body

PHOTOMETRICS (LL-HBLFB-36L)

Luminaire Data	
Description	LL-HBLFB-36L
Total Lumens	34,727
Input Wattage	242
Efficacy (lm/W)	143
Spacing Criterion (0-180°)	1.26
Spacing Criterion (90-270°)	1.28

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	5,902	17.0%
0-30°	12,592	36.3%
0-40°	20,536	59.1%
20-50°	21,267	61.2%
40-70°	12,472	35.9%
0-60°	30,906	89.0%
0-80°	34,256	98.6%
0-90°	34,682	99.9%
90-180°	45	0.1%
0-180°	34,727	100.0%

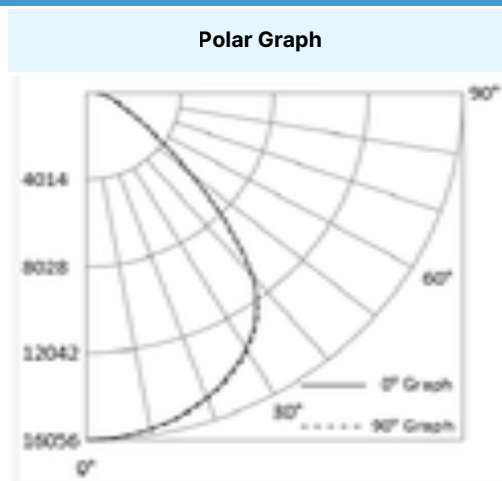


Photometric calculated at 5000K & highest lumen setting.

PHOTOMETRICS (LL-HBLFB-60L)

Luminaire Data	
Description	LL-HBLFB-60L
Total Lumens	58,715
Input Wattage	398
Efficacy (lm/W)	148
Spacing Criterion (0-180°)	1.28
Spacing Criterion (90-270°)	1.26

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20°	9,998	17.0%
0-30°	21,317	36.3%
0-40°	34,727	59.1%
20-50°	35,995	61.3%
40-70°	21,199	36.1%
0-60°	52,364	89.2%
0-80°	58,000	98.8%
0-90°	58,644	99.9%
90-180°	71	0.1%
0-180°	58,715	100.0%

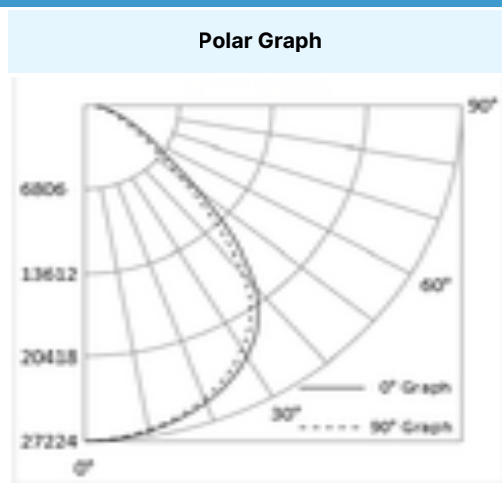

Photometric calculated at 5000K & highest lumen setting.



Highbay Linear Full Body

COMPATIBLE EMERGENCY DRIVERS-INSTALLED

Emergency Driver Part Number	EM10		EM13		EM25	
Model	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens
LL-HBLFB-18L	10	1400	13	1820	25	3500
LL-HBLFB-24L	10	1500	13	1950	25	3750
LL-HBLFB-36L	10	1400	13	1820	25	3500
LL-HBLFB-60L	10	1500	13	1950	25	3750

* **NOTE** 480V option not compatible with EM.

PLUGS AND CORDS

Part # Suffix	Description	For Use With
6C3	6' cord - 3 conductor (black/white/green)	Standard & 480V
6C4	6' cord - 4 conductor (black/white/green/red)	EM driver
6C5	6' cord - 5 conductor (black/white/green/purple/pink)	Dimming (standard & 480V)
6C6	6' cord - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
10C3	10' cord - 3 conductor (black/white/green)	Standard & 480V
10C4	10' cord - 4 conductor (black/white/green/red)	EM driver
10C5	10' cord - 5 conductor (black/white/green/purple/pink)	Dimming (standard & 480V)
10C6	10' cord - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
15C3	15' cord - 3 conductor (black/white/green)	Standard & 480V
15C4	15' cord - 4 conductor (black/white/green/red)	EM driver
15C5	15' cord - 5 conductor (black/white/green/purple/pink)	Dimming (standard & 480V)
15C6	15' cord - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver
6W3	6' whip - 3 conductor (black/white/green)	Standard & 480V
6W4	6' whip - 4 conductor (black/white/green/red)	EM driver
6W5	6' whip - 5 conductor (black/white/green/purple/pink)	Dimming (standard & 480V)
6W6	6' whip - 6 conductor (black/white/green/red/purple/pink)	Dimming & EM driver



Highbay Linear Full Body

PLUGS AND CORDS

Part # Suffix	Description	For Use With
6P515	6' cord - 3 conductor (black/white/green) - NEMA 5-15 plug (120V/15A)	Standard luminaire
6P615	6' cord - 3 conductor (black/white/green) - NEMA 6-15 plug (240V/15A)	Standard luminaire
6P715	6' cord - 3 conductor (black/white/green) - NEMA 7-15 plug (277V/15A)	Standard luminaire
6P520	6' cord - 3 conductor (black/white/green) - NEMA 5-20 plug (120V/20A)	Standard luminaire
6P620	6' cord - 3 conductor (black/white/green) - NEMA 6-20 plug (277V/20A)	Standard luminaire
6P515L	6' cord - 3 conductor (black/white/green) - NEMA L5-15 plug (120V/15A locking)	Standard luminaire
6P615L	6' cord - 3 conductor (black/white/green) - NEMA L6-15 plug (240V/15A locking)	Standard luminaire
6P715L	6' cord - 3 conductor (black/white/green) - NEMA L7-15 plug (277V/15A locking)	Standard luminaire
6P520L	6' cord - 3 conductor (black/white/green) - NEMA L5-20 plug (120V/20A locking)	Standard luminaire
6P620L	6' cord - 3 conductor (black/white/green) - NEMA L6-20 plug (240V/20A locking)	Standard luminaire
6P720L	6' cord - 3 conductor (black/white/green) - NEMA L7-20 plug (277V/20A locking)	Standard luminaire
6P2420L	6' cord - 3 conductor (black/white/green) - NEMA L24-20 plug (347V/20A locking)	480V luminaire
6P820L	6' cord - 3 conductor (black/white/green) - NEMA L8-20 plug (480V/20A locking)	480V luminaire
10P515	10' cord - 3 conductor (black/white/green) - NEMA 5-15 plug (120V/15A)	Standard luminaire
10P615	10' cord - 3 conductor (black/white/green) - NEMA 6-15 plug (240V/15A)	Standard luminaire
10P715	10' cord - 3 conductor (black/white/green) - NEMA 7-15 plug (277V/15A)	Standard luminaire
10P520	10' cord - 3 conductor (black/white/green) - NEMA 5-20 plug (120V/20A)	Standard luminaire
10P620	10' cord - 3 conductor (black/white/green) - NEMA 6-20 plug (277V/20A)	Standard luminaire
10P515L	10' cord - 3 conductor (black/white/green) - NEMA L5-15 plug (120V/15A locking)	Standard luminaire
10P615L	10' cord - 3 conductor (black/white/green) - NEMA L6-15 plug (240V/15A locking)	Standard luminaire
10P715L	10' cord - 3 conductor (black/white/green) - NEMA L7-15 plug (277V/15A locking)	Standard luminaire
10P520L	10' cord - 3 conductor (black/white/green) - NEMA L5-20 plug (120V/20A locking)	Standard luminaire
10P620L	10' cord - 3 conductor (black/white/green) - NEMA L6-20 plug (240V/20A locking)	Standard luminaire
10P720L	10' cord - 3 conductor (black/white/green) - NEMA L7-20 plug (277V/20A locking)	Standard luminaire
10P2420L	10' cord - 3 conductor (black/white/green) - NEMA L24-20 plug (347V/20A locking)	480V luminaire
10P820L	10' cord - 3 conductor (black/white/green) - NEMA L8-20 plug (480V/20A locking)	480V luminaire



PLUGS AND CORDS

Part # Suffix	Description	For Use With
15P515	15' cord - 3 conductor (black/white/green) - NEMA 5-15 plug (120V/15A)	Standard luminaire
15P615	15' cord - 3 conductor (black/white/green) - NEMA 6-15 plug (240V/15A)	Standard luminaire
15P715	15' cord - 3 conductor (black/white/green) - NEMA 7-15 plug (277V/15A)	Standard luminaire
15P520	15' cord - 3 conductor (black/white/green) - NEMA 5-20 plug (120V/20A)	Standard luminaire
15P620	15' cord - 3 conductor (black/white/green) - NEMA 6-20 plug (277V/20A)	Standard luminaire
15P515L	15' cord - 3 conductor (black/white/green) - NEMA L5-15 plug (120V/15A locking)	Standard luminaire
15P615L	15' cord - 3 conductor (black/white/green) - NEMA L6-15 plug (240V/15A locking)	Standard luminaire
15P715L	15' cord - 3 conductor (black/white/green) - NEMA L7-15 plug (277V/15A locking)	Standard luminaire
15P520L	15' cord - 3 conductor (black/white/green) - NEMA L5-20 plug (120V/20A locking)	Standard luminaire
15P620L	15' cord - 3 conductor (black/white/green) - NEMA L6-20 plug (240V/20A locking)	Standard luminaire
15P720L	15' cord - 3 conductor (black/white/green) - NEMA L7-20 plug (277V/20A locking)	Standard luminaire
15P2420L	15' cord - 3 conductor (black/white/green) - NEMA L24-20 plug (347V/20A locking)	480V luminaire
15P820L	15' cord - 3 conductor (black/white/green) - NEMA L8-20 plug (480V/20A locking)	480V luminaire



Highbay Linear Full Body

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

ORDERING GUIDE

Brand	Fixture Type	Lumen Package	Voltage
LL LITELUME	HBLFB Highbay Linear Full Body	18L 18000 Lumens 24L 24000 Lumens 36L 36000 Lumens 60L 60000 Lumens	UNV 120-277V 480 480V
CCT	Power	Finish	Accessories
SCT Selectable Color Temperature	SP Selectable Power	WH White	* See Accessories Ordering Information on Page 10

FIXTURE ORDERING INFORMATION

Part #	Watts	Lumens	Kelvin	Voltage
LL-HBLFB-18L-UNV-SCT-SP-WH	82W/105W/130W	12000/15000/18000	4000K 5000K	120-277
LL-HBLFB-24L-UNV-SCT-SP-WH	98W/117W/161W	15000/18000/24000	4000K 5000K	120-277
LL-HBLFB-36L-UNV-SCT-SP-WH	154W/196W/242W	24000/30000/36000	4000K 5000K	120-277
LL-HBLFB-60L-UNV-SCT-SP-WH	228W/309W/397W	36000/48000/60000	4000K 5000K	120-277
LL-HBLFB-18L-480-SCT-SP-WH	82W/105W/130W	12000/15000/18000	4000K 5000K	480
LL-HBLFB-24L-480-SCT-SP-WH	98W/117W/161W	15000/18000/24000	4000K 5000K	480
LL-HBLFB-36L-480-SCT-SP-WH	154W/196W/242W	24000/30000/36000	4000K 5000K	480
LL-HBLFB-60L-480-SCT-SP-WH	228W/309W/397W	36000/48000/60000	4000K 5000K	480



Highbay Linear Full Body

ACCESSORIES ORDERING INFORMATION

Part #	Description
FI-EM10	Factory Installed Emergency Battery Backup 10W
FI-EM13	Factory Installed Emergency Battery Backup 13W
FI-EM25	Factory Installed Emergency Battery Backup 25W
HD07VR-PH-1-90	Haisen DC Powered Bi-Level Dim Dusk/Dawn
HD07VR-MH-B-1-90	PIR Bi-Level-Dimming Sensor with 90 Degree Elbow Adapter *Maximum Mounting Height 39'
HD05R	Haisen DC Powered Bi-Level Dim Dusk/Dawn
HBLFB-WG-18L	Microwave Bi-Level-Dimming Sensor with 90 Degree Elbow Adapter *Maximum Mounting Height 49'
HBLFB-WG-24L	Haisen Universal Smart Remote Control
HBLFB-WG-36L	Wireguard for 18L
HBLFB-WG-60L	Wireguard for 24L
HBLFB-SMK	Wireguard for 36L
HBLFB-PMK	Wireguard for 60L
HBLFB-CMK-3	Surface Mount Kit for LL-HBLFB - All Models **Not Compatible with 480V or Emergency Battery Backup
HBLFB-CMK-5	Pendant Mount Kit for LL-HBLFB - All Models **Not Compatible with 480V or Emergency Battery Backup
LL-BLEM-CP-10C	Cable Mount Kit 3 Meter - All Models
LL-BLEM-CP-13C	Cable Mount Kit 5 Meter - All Models
6C3	Constant Power Emergency LED Driver 10.7 Watts, 2 Ft Conduit on Each End, Field Installed
6C4	Constant Power Emergency LED Driver 13.7 Watts, 2 Ft Conduit on Each End, Field Installed
6C5	6 Ft Cord - 3 Conductor (Black/White/Green) For Use With: Standard and 480V
6C6	6 Ft Cord - 4 Conductor (Black/White/Green/Red) For Use With: EM Driver
10C3	6 Ft Cord - 5 Conductor (Black/White/Green/Purple/Pink) For Use With: Dimming (Standard and 480V)
10C4	6 Ft Cord - 6 Conductor (Black/White/Green/Red/Purple/Pink) For Use With: Dimming and EM Driver
10C5	10 Ft Cord - 3 Conductor (Black/White/Green) For Use With: Standard and 480V
10C6	10 Ft Cord - 4 Conductor (Black/White/Green/Red) For Use With: EM Driver
15C3	10 Ft Cord - 5 Conductor (Black/White/Green/Purple/Pink) For Use With: Dimming (Standard and 480V)



Highbay Linear Full Body

ACCESSORIES ORDERING INFORMATION

Part #	Description
15C4	15 ft Cord - 4 Conductor (Black/White/Green/Red) For Use With: EM Driver
15C5	15 ft Cord - 5 Conductor (Black/White/Green/Purple/Pink) For Use With: Dimming (Standard and 480V)
15C6	15 ft Cord - 6 Conductor (Black/White/Green/Red/Purple/Pink) For Use With: Dimming and EM Driver
6W3	6 ft Whip - 3 Conductor (Black/White/Green) For Use With: Standard and 480V
6W4	6 ft Whip - 4 Conductor (Black/White/Green/Red) For Use With: EM Driver
6W5	6 ft Whip - 5 Conductor (Black/White/Green/Purple/Pink) For Use With: Dimming (Standard and 480V)
6W6	6 ft Whip - 6 Conductor (Black/White/Green/Red/Purple/Pink) For Use With: Dimming and EM Driver
6P515	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA 5-15 Plug (120V/15A) For Use With: Standard Luminaire
6P615	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA 6-15 Plug (240V/15A) For Use With: Standard Luminaire
6P715	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA 7-15 Plug (277V/15A) For Use With: Standard Luminaire
6P520	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA 5-20 Plug (120V/20A) For Use With: Standard Luminaire
6P620	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA 6-20 Plug (277V/20A) For Use With: Standard Luminaire
6P515L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L5-15 Plug (120V/15A Locking) For Use With: Standard Luminaire
6P615L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L6-15 Plug (240V/15A Locking) For Use With: Standard Luminaire
6P715L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L7-15 Plug (277V/15A Locking) For Use With: Standard Luminaire
6P520L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L5-20 Plug (120V/20A Locking) For Use With: Standard Luminaire
6P620L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L6-20 Plug (240V/20A Locking) For Use With: Standard Luminaire
6P720L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L7-20 Plug (277V/20A Locking) For Use With: Standard Luminaire
6P2420L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L24-20 Plug (347V/20A Locking) For Use With: 480V Luminaire
6P820L	6 ft Cord - 3 Conductor (Black/White/Green) - NEMA L8-20 Plug (480V/20A Locking) For Use With: 480V Luminaire
10P515	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA 5-15 Plug (120V/15A) For Use With: Standard Luminaire
10P615	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA 6-15 Plug (240V/15A) For Use With: Standard Luminaire
10P715	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA 7-15 Plug (277V/15A) For Use With: Standard Luminaire
10P520	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA 5-20 Plug (120V/20A) For Use With: Standard Luminaire
10P620	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA 6-20 Plug (277V/20A) For Use With: Standard Luminaire



Highbay Linear Full Body

ACCESSORIES ORDERING INFORMATION

Part #	Description
10P515L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L5-15 Plug (120V/15A Locking) For Use With: Standard Luminaire
10P615L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L6-15 Plug (240V/15A Locking) For Use With: Standard Luminaire
10P715L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L7-15 Plug (277V/15A Locking) For Use With: Standard Luminaire
10P520L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L5-20 Plug (120V/20A Locking) For Use With: Standard Luminaire
10P620L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L6-20 Plug (240V/20A Locking) For Use With: Standard Luminaire
10P720L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L7-20 Plug (277V/20A Locking) For Use With: Standard Luminaire
10P2420L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L24-20 Plug (347V/20A Locking) For Use With: 480V Luminaire
10P820L	10 ft Cord - 3 Conductor (Black/White/Green) - NEMA L8-20 Plug (480V/20A Locking) For Use With: 480V Luminaire
15P515	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA 5-15 Plug (120V/15A) For Use With: Standard Luminaire
15P615	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA 6-15 Plug (240V/15A) For Use With: Standard Luminaire
15P715	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA 7-15 Plug (277V/15A) For Use With: Standard Luminaire
15P520	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA 5-20 Plug (120V/20A) For Use With: Standard Luminaire
-15P620	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA 6-20 Plug (277V/20A) For Use With: Standard Luminaire
-15P515L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L5-15 Plug (120V/15A Locking) For Use With: Standard Luminaire
15P615L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L6-15 Plug (240V/15A Locking) For Use With: Standard Luminaire
15P715L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L7-15 Plug (277V/15A Locking) For Use With: Standard Luminaire
15P520L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L5-20 Plug (120V/20A Locking) For Use With: Standard Luminaire
15P620L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L6-20 Plug (240V/20A Locking) For Use With: Standard Luminaire
15P720L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L7-20 Plug (277V/20A Locking) For Use With: Standard Luminaire
15P2420L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L24-20 Plug (347V/20A Locking) For Use With: 480V Luminaire
15P820L	15 ft Cord - 3 Conductor (Black/White/Green) - NEMA L8-20 Plug (480V/20A Locking) For Use With: 480V Luminaire