



## Description

LED Indoor Thermoplastic Remote Head

## Illumination:

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125 watt) per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Optional high lumen heads are 1.5 watts (12 LEDs x 0.125 watt per head) and provide increased center-to-center spacing.

## Electrical:

- Powered from low voltage power source with low voltage wiring (not provided).

## Mounting:

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

## Housing:


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

## Warranty/Listing:

- Seven year warranty.
- UL Listed or damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes



## Dimensions:

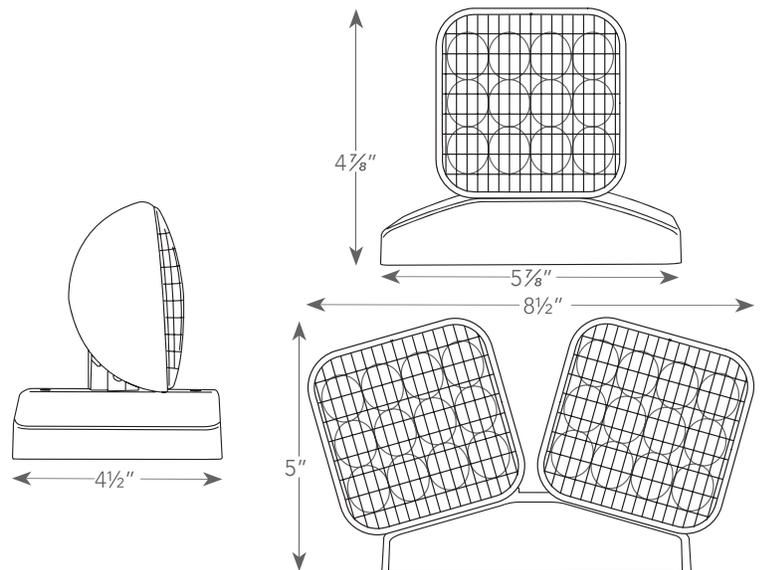

## Fixture Compatibility Chart:

Reference individual unit equipment specification sheets for remote load capacity availability.

LL-CADXR	LL-CALEDCXTE-RC	LL-CAR
LL-CEM-RC	LL-CEU-RC	LL-CKXTEU-RC
LL-CLPU	LL-CWLEZXTE-RC	LL-DXR
LL-E-1-RC	LL-EM-RC	LL-LESDXR627
LL-LEDTFX-2	LL-NYDXR	LL-RMCLPU-RC
LL-RMLEDCXTE-RC	LL-RMR-16-65/125	



<b>Project Name</b>	
<b>Catalog #</b>	
<b>Job Type</b>	
<b>Prepared By</b>	
<b>Notes</b>	

### Fixture Ordering Information

Model	No. of Heads		Option		Voltage		Housing Color		Lamp Type <sup>1</sup>	
	LL-RHLED	1 2	Single Head Double Head	(blank) SDT	For Standard Non Self-Diagnostic Fixtures Self Diagnostics	MV	For Use With 3.6V, 6V, 9.6V & 12V DC Power Source	W B	White Black	(blank) HL

<sup>1</sup>Wattage rating stated per head.