



Garage Canopy Equalizer



Description

The LITELUME™ LED Garage Canopy Equalizer (LL-GCE) is a low profile luminaire constructed with a IP66 rated one piece die cast housing suitable for both indoor and outdoor applications. Subtle equal illumination with 15% uplight to provide enhance uniformity. Featuring a proprietary optical system with anti-glare lens making this fixture ideal for parking garages, storage areas, walkways and low or high security areas.

Fixture Information

Size:	45W/70W
Housing:	High performance Die-cast Aluminum
Finish:	Protective powder coat
Colors:	Standard: White (WH) Bronze (BZ)
Mountings:	Surface Mount or Pendant
Lens:	Polycarbonate
Uplight:	15%
CRI:	80
Power Factor:	.90
Dimmable:	Standard: 0-10v continuous
Voltage	120-277V / 277-480V
Operating Temperature:	-22F - 113F
Sensor:	Standard: No sensor Optional: Microwave Motion Sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

5,625 to 8,750 lm

Lumens Per Watt (typical):

125 lm/W

CCT:

4000K

5000K

CCT:

Type V

Lifespan:

Features High performance LED's with up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location

IP66 rated



Title 24 Compliant





Dimension


Item	Width	Width	Height	Weight
GCE	13.8"	13.8"	2.6"	9.32"

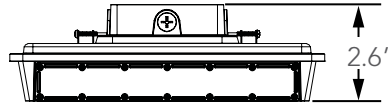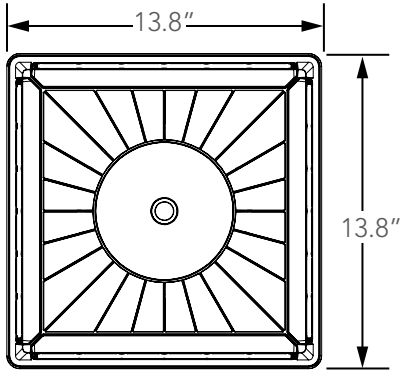

Photometric Data


45W 4000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

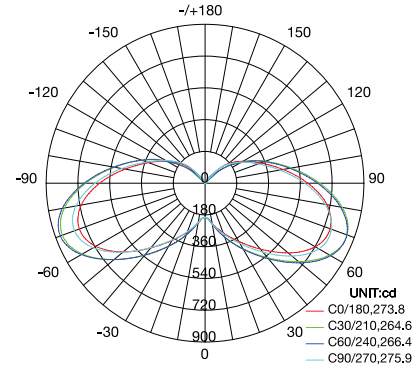


AVERAGE BEAM ANGLE(50%):270.2 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

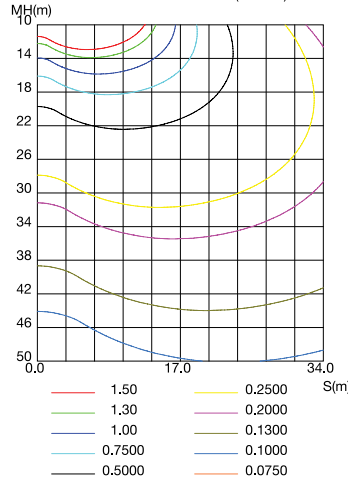


ISOLUX DIAGRAM

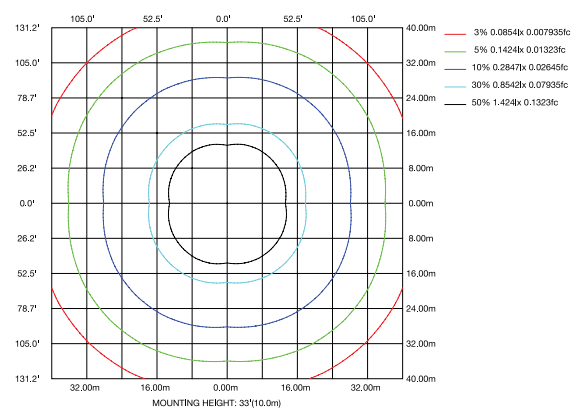


75W 5000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

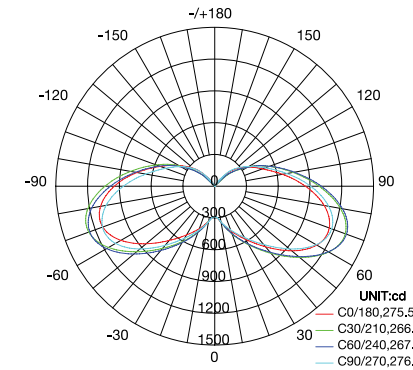


AVERAGE BEAM ANGLE(50%):271.4 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

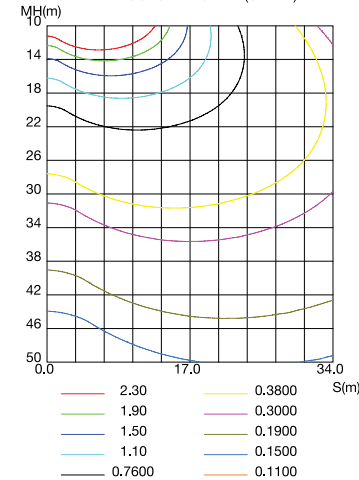

ISOLUX DIAGRAM

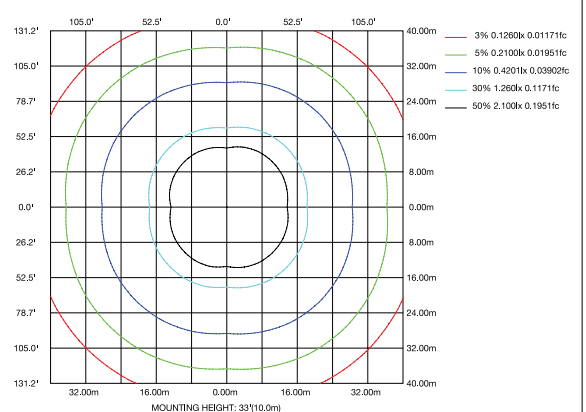



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-GCE-45-50-UNV-WH	45	5625	5000	120-277
LL-GCE-45-40-UNV-WH	45	5625	4000	120-277
LL-GCE-70-50-UNV-WH	70	8750	5000	120-277
LL-GCE-70-40-UNV-WH	70	8750	4000	120-277
LL-GCE-45-50-UNV-BZ	45	5625	5000	120-277
LL-GCE-45-40-UNV-BZ	45	5625	4000	120-277
LL-GCE-70-50-UNV-BZ	70	8750	5000	120-277
LL-GCE-70-40-UNV-BZ	70	8750	4000	120-277
LL-GCE-45-50-HV-WH	45	5625	5000	277-480
LL-GCE-45-40-HV-WH	45	5625	4000	277-480
LL-GCE-70-50-HV-WH	70	8750	5000	277-480
LL-GCE-70-40-HV-WH	70	8750	4000	277-480
LL-GCE-45-50-HV-BZ	45	5625	5000	277-480
LL-GCE-45-40-HV-BZ	45	5625	4000	277-480
LL-GCE-70-50-HV-BZ	70	8750	5000	277-480
LL-GCE-70-40-HV-BZ	70	8750	4000	277-480

Accessories Ordering Information

Part #	Description
BRI823-B-D	Sharkward 120-277V 0-10V PIR Sensor
RC-100	Remote Control 100
BRI823-B-D-BLE-GE	HOMEWELL GEBC 12-24V DC 0-10V 120-277V Bluetooth PIR Sensor
EM8	Emergency Battery Back Up 8W
EM15	Emergency Battery Back Up 15W

* Please contact LITELUME for all Custom Option Requests