



Description

The LITELUME™ LED Eldorado Sconce (LL-ELDOSC) luminaire incorporates a traditional fresh design. Features a die-formed cold rolled steel housing with frosted lens for a subtle approach. Offering light models in Field Selectable CCT with high power factor and low THD. Applications: commercial, residential, hospitality, entertainment and Hallways lighting.

Fixture Information

Size:	15W/23W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Black (BK) Optional: White (WH) Oil Rubbed Bronze (ORB) Gray (GY) Custom (CUS)
Mounting:	Standard: Wall Mount
Lens:	High transmission acrylic
CRI:	80
THD:	<10%
Power Factor:	.98
Voltage:	Standard: 120-277V
Dimming:	Standard: No
Sensor	Standard: None
Warranty:	10 Year Warranty

Performance Data

Lumen Output:

890 to 1,700 lm

Lumens Per Watt (typical):

74 lm/W

CCT:

3000K
3500K
4000K

Lifespan:

60,000 hrs

Ratings & Certificates


ETL/cETL Listed
Wet Location Listed





Dimensions

Item	Width	Height	Depth
LL-ELDOSC-1L	9.1"	14.6"	3.9"
LL-ELDOSC-2L	9.1"	24"	3.9"

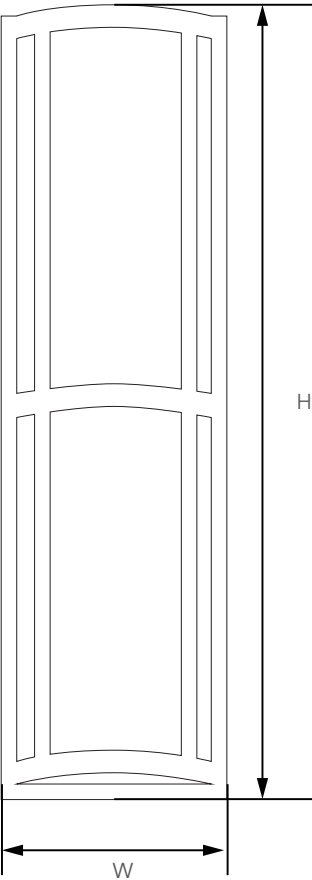



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand	Fixture Type	Lumen Package	Voltage	CCT	Finish
LL	LITELUME	ELDOSC Eldorado Sconce	1L 890 Lumens	UNV 120-277V	SCT Selectable color temperature *
		2L 1700 Lumens			BK Black
					ORB Oil Rubbed Bronze
					WH White
					GY Gray
					CUS Custom

* SCT Selectable color temperature 3000K/3500K/4000K

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Finish
LL-ELDOSC-1L-UNV-SCT-BK	15	890	3000K 3500K 4000K	120-277	Black
LL-ELDOSC-2L-UNV-SCT-BK	23	1700	3000K 3500K 4000K	120-277	Black
LL-ELDOSC-1L-UNV-SCT-ORB	15	890	3000K 3500K 4000K	120-277	Oil Rubbed Bronze
LL-ELDOSC-2L-UNV-SCT-ORB	23	1700	3000K 3500K 4000K	120-277	Oil Rubbed Bronze
LL-ELDOSC-1L-UNV-SCT-WH	15	890	3000K 3500K 4000K	120-277	White
LL-ELDOSC-2L-UNV-SCT-WH	23	1700	3000K 3500K 4000K	120-277	White
LL-ELDOSC-1L-UNV-SCT-GY	15	890	3000K 3500K 4000K	120-277	Gray
LL-ELDOSC-2L-UNV-SCT-GY	23	1700	3000K 3500K 4000K	120-277	Gray
LL-ELDOSC-1L-UNV-SCT-CUS	15	890	3000K 3500K 4000K	120-277	Custom
LL-ELDOSC-2L-UNV-SCT-CUS	23	1700	3000K 3500K 4000K	120-277	Custom