

Wallpack Large - Semi Cutoff





Description

The LITELUME™ Wallpack Large – Semi Cutoff (LL-WPLSC) is a Wall mounted LED fixture with a durable polycarbonate optical lens.

Applications: Entryways, Pathway, Perimeter and Security lighting.

Fixture Information

Size: 28W/42W/48W/56W/70W/72W/

96W/120W

Housing: Die-cast Aluminum Housing
Finish: Protective powder coat

Color: Standard: Bronze

Custom Options: Black (BK) White

(WH) Grey (GY)

Mounting: Standard: Wall Mount

Lens: Polycarbonate

CRI: 80
Power Factor: .90

Operating Temperature: -22°F to 113°F

Sensor: Standard: Button Photocell (120-

277V) & Photocell Plug Optional: PIR Motion Sensor

Standard: 0-10V continuous

Voltage: Standard:120-277V

Warranty: 10-Year Limited Warranty

Performance Data

Lumen Output:

4,483 to 17,226 lm

Lumens Per Watt (typical):

140 lm/W

3000K 4000K 5000K

Distribution:

96.3 X 71° 95.3 X 62.9°

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location







Dimming:





Dimension

Item	Wide	Depth	Height	Weight
28W-70W	14.03"	7.82"	6.26"	6.99 lbs
48-120W	13.98"	6.08"	6.18"	9.1 lbs











Photometrics




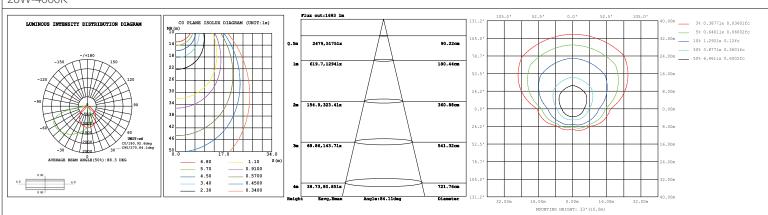



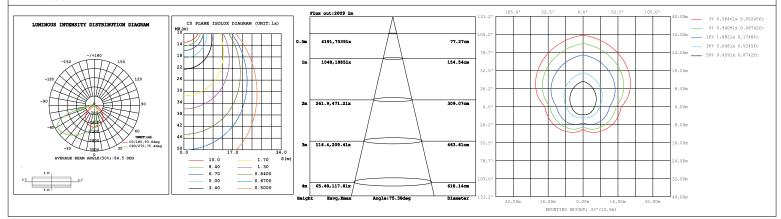



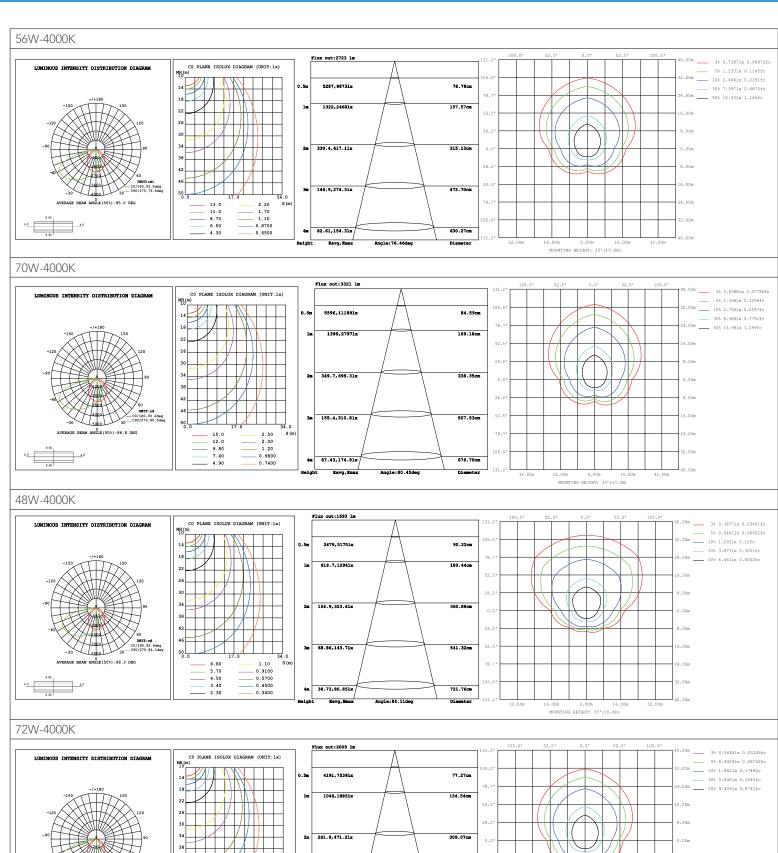

10.0 8.40 6.70 5.00 3.40 1.70 1.30


MOUNTING HEIGHT: 33'(10.0m)

Angle:75.38deg

116.4,209.41x

65.48,117.81x



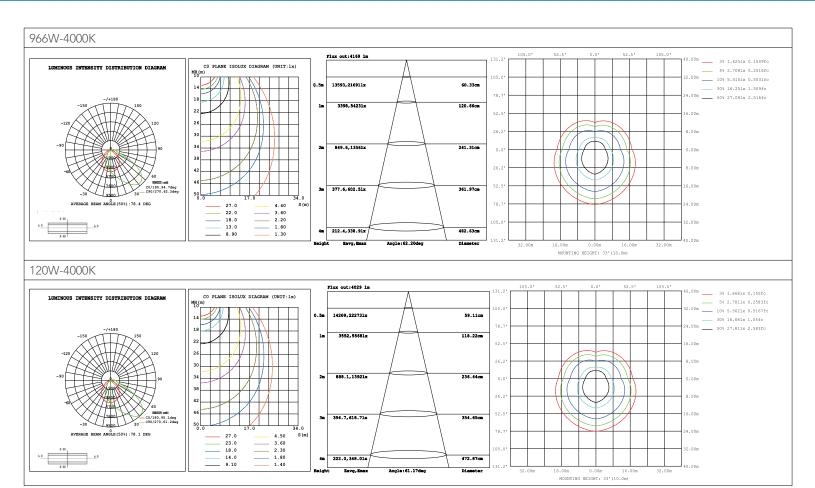



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution
LL-WPLSC-[28][42][56][70]-3CCT-UNV-BZ-PC	28W/42W/56W/70W	4483/5896/7740/9753	3000K 4000K 5000K	120-277	96.3 X 71°
LL-WPLSC-[48][72][96][120]-2CCT-UNV-BZ-PC	48W/72W/96W/120W	7496/10985/14162/17226	4000K 5000K	120-277	95.3 X 62.9°

^{*} Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
BRI823-X-D	Shardward 0-10V PIR Sensor
RC-100	Remote Control 100