




NOTE: BASE COVER, ANCHOR BOLT KIT & TEMPLATE INCLUDED



Dimension Data


Catalog	Height	Gauge	Size	Subsurface Depth	Weight (lbs)	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120	EPA 130	EPA 140
LL-CS-DBRSS-10-4-11-FT-BZ	10ft	11	4" dia.	3'	74.8	28.2	23.5	20.3	19.4	17.3	15.6	12.3	9.8
LL-CS-DBRSS-15-4-11-FT-BZ	15ft				99	18.2	15.5	13.1	11.5	9.9	7.4	5.2	3.8
LL-CS-DBRSS-20-4-11-FT-BZ	20ft			5'	132	12.2	10.3	8.8	7.2	6.1	4.6	2.2	1.0

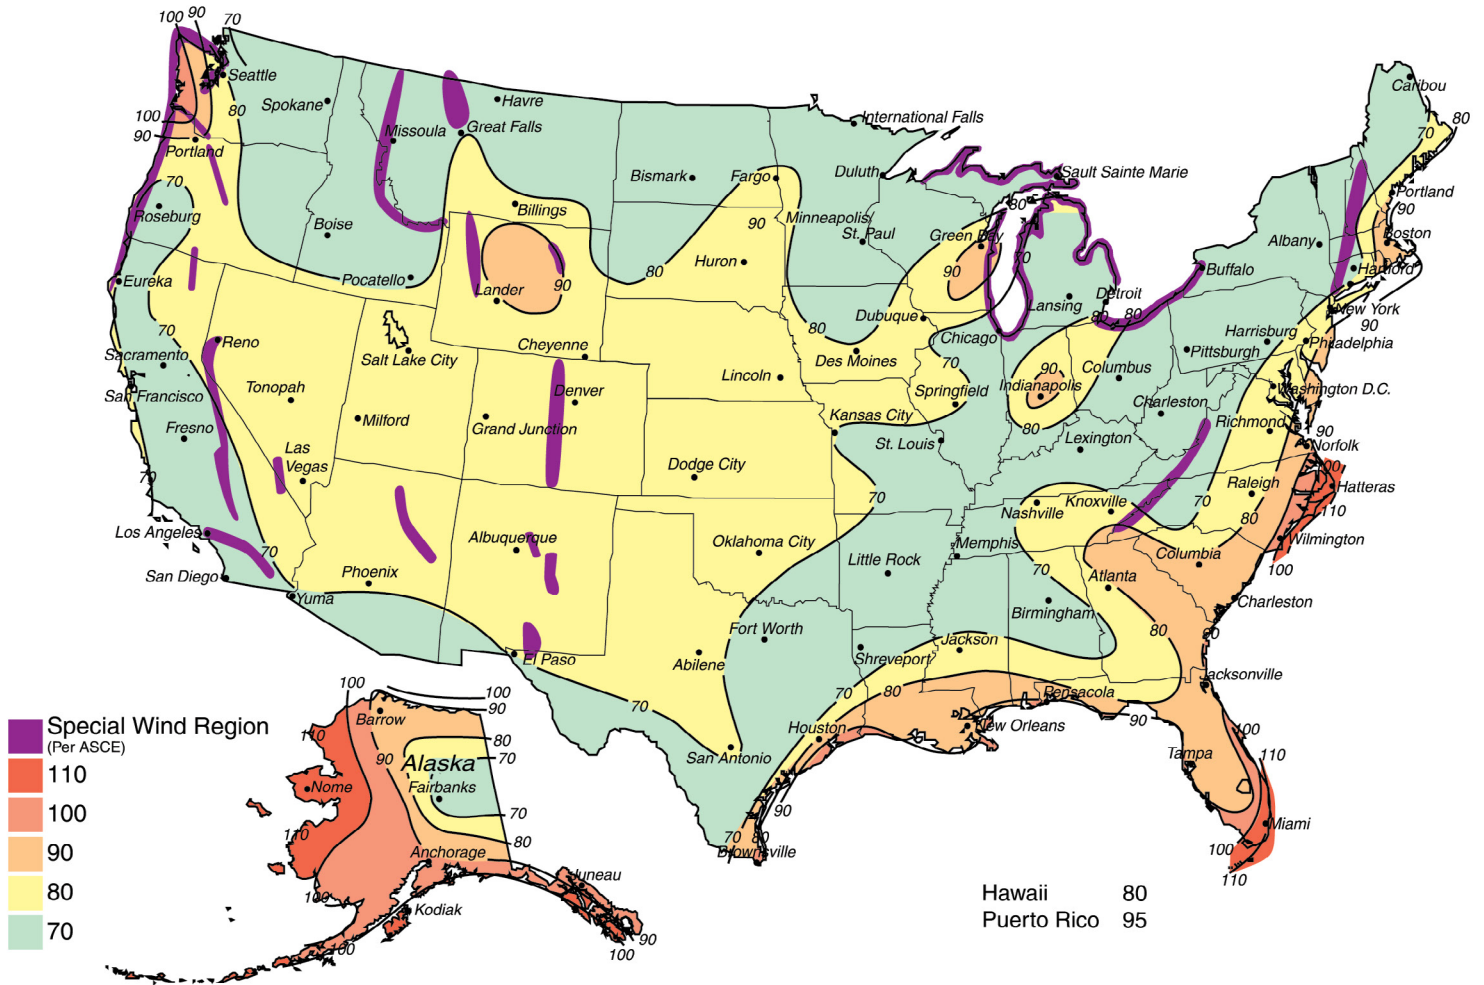



Features

Mounting: Standard length poles are predrilled (2@180°), with a polycarbonate top cover and hole plugs for unused predrilled locations.

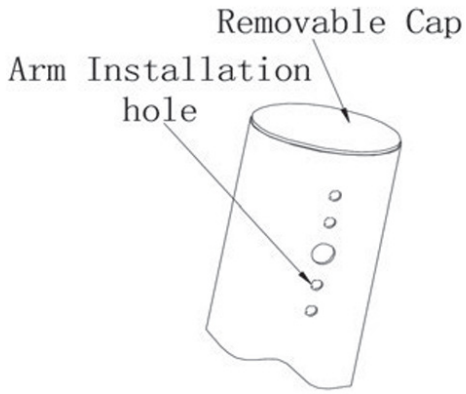

DIRECT UNDERGROUND BURIAL:



BLACK ASPHALTUM: Black Asphaltum is an economical, highly protective, acid and alkali-resistant coating designed for Direct burial Light Pole use.

This protective coating is applied on either galvanized or powder-coated products to add a supplemental layer of corrosion protection. This combination of galvanizing and/or powder coating coupled with black Asphaltum provides the best below-grade corrosion resistance in the Light Pole industry.



ADVANTAGE:

- Rust proofing properties
- Superior resistance to acids and alkali
- Outstanding adhesion and wear resistance

Installation

Installation Instructions

1. Excavate the foundation hole according to the specified dimensions.
2. Compact and level the bottom of the hole using a compaction machine.
3. Place the embedded end of the light pole into the hole, align and pull the power cable through the bottom handhole, and ensure the pole is perpendicular to the ground.
4. Temporarily brace or fix the pole to maintain vertical alignment.
5. Pour concrete around the pole and allow it to cure completely before removing the bracing.

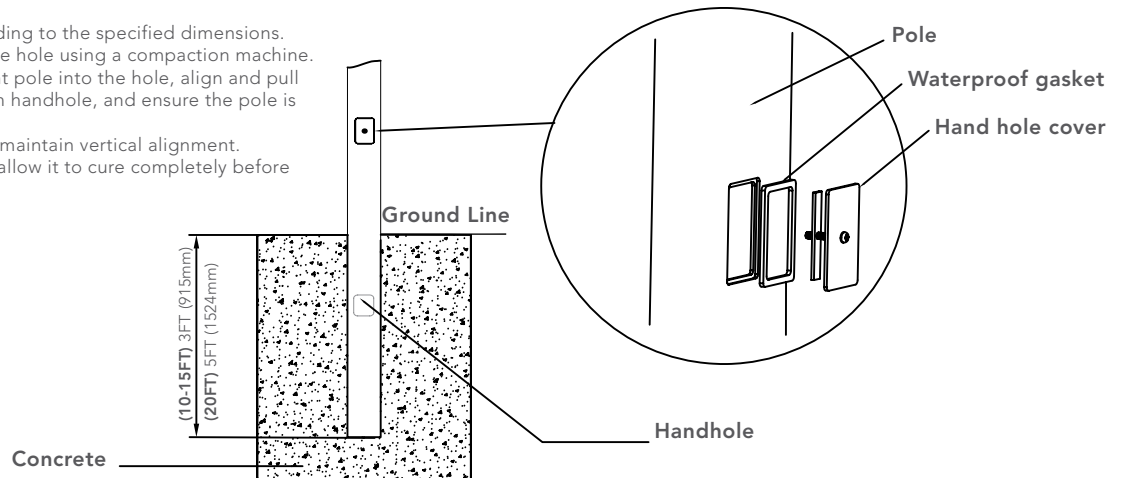

Recommended Concrete design size *		
Specification	Ø	Depth
10-15FT	26 - 32"	48 - 60"
20FT	30 - 36"	72 - 84"

*Guideline only, make adjustments based on local soil conditions