



Square Canopy Low Profile



*Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification



(shown with Emergency Battery)

Description

The LITELUME™ LED Square Canopy Low Profile Pack (LL-SCLP) boasts up to 170 lumens per watt. Featuring a sealed die-cast construction and shatter-resistant polycarbonate acrylic optical lens with UV stabilizers. Compact in design and symmetry making this luminaire ideal for walkways, parking garages, entrance ways, and over-all canopy applications.

Fixture Information

Size:	27W/40W/60W/110W
Housing:	Die-cast Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, White
Mounting:	Ceiling
Lens:	Polycarbonate
CRI:	80
THD:	<20%
Surge Protector:	Optional: 10 kVA
Voltage:	Standard: 120-277V Custom Option: 347-480V
Sensor:	Standard: No sensor Optional: Internal Dimming Microwave Sensor or External Bi-level PIR motion sensor Remote battery back-up kit
Operating Temperature:	50°F - 104°F
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

3,800 to 16,000 lm

Lumens Per Watt (typical):

130 to 170 lm/W

CCT:

3000K
4000K
5000K

Distribution

Type V

Lifespan:

Up to 100,000 running hours

Ratings & Certificates

UL Listed For Wet Location
DLC Premium Qualified*
IP66 rated
TAA Compliant/BAA Optional




QuickShip Ordering Information

Part #
LL-SCLP-27-50-UNV-BZ
LL-SCLP-27-40-UNV-BZ
LL-SCLP-40-50-UNV-WH
LL-SCLP-40-50-UNV-BZ
LL-SCLP-40-40-UNV-BZ
LL-SCLP-60-50-UNV-WH
LL-SCLP-60-50-UNV-BZ
LL-SCLP-60-40-UNV-BZ
LL-SCLP-[27][40][50][60]-3CCT-UNV-BZ



Dimension


Item	Length	Height	Width
27W	9.52"	9.52"	3.19"
40W	9.52"	9.52"	3.19"
60W	9.52"	9.52"	3.19"
110W	11.52"	11.52"	3.80"

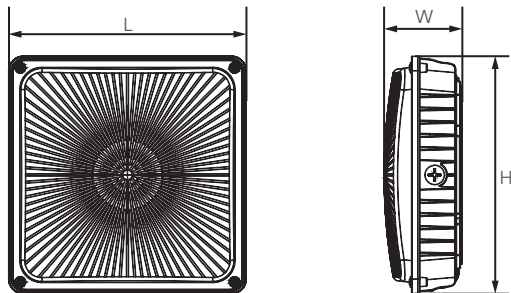

Mounting

Standard mounting includes Pendant Mount or Direct Surface Mount.

Photometrics

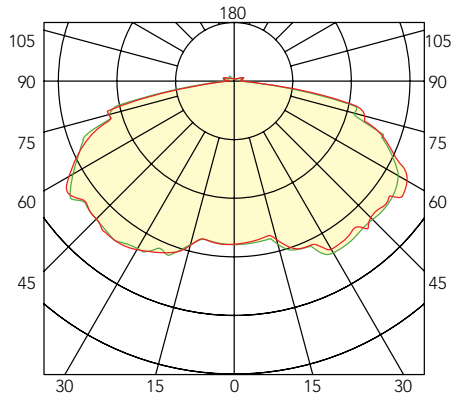



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-SCLP-27-50-UNV-BZ	27	3800	5000	120-277
LL-SCLP-27-40-UNV-BZ	27	3750	4000	120-277
LL-SCLP-40-50-UNV-BZ	40	5450	5000	120-277
LL-SCLP-40-40-UNV-BZ	40	5350	4000	120-277
LL-SCLP-60-50-UNV-BZ	60	8000	5000	120-277
LL-SCLP-60-40-UNV-BZ	60	7800	4000	120-277
LL-SCLP-[27][40][50][60]-3CCT-UNV-BZ	27/40/50/60	3800/5400/6700/8000	3000K 4000K 5000K	120-277
LL-SCLP-[27][40][50][60]-3CCT-UNV-WH	27W/40W/50W/60W	3800/5400/6700/8000	3000K 4000K 5000K	120-277
LL-SCLP-[40][60][85][110]-3CCT-UNV-BZ	40W/60W/85W/110W	7000/10000/13000/16000	3000K 4000K 5000K	120-277

QuickShip Ordering Information

Part #
LL-SCLP-27-50-UNV-BZ
LL-SCLP-27-40-UNV-BZ
LL-SCLP-40-50-UNV-WH
LL-SCLP-40-50-UNV-BZ
LL-SCLP-40-40-UNV-BZ
LL-SCLP-60-50-UNV-WH
LL-SCLP-60-50-UNV-BZ
LL-SCLP-60-40-UNV-BZ
LL-SCLP-[27][40][50][60]-3CCT-UNV-BZ

Accessories Ordering Information

Part #	Description
US002-01VR-2	Haisen 10.5 - 15V DC 0-10V Dimming Microwave Motion Sensor
HD05R	Haisen Universal Smart Remote Control
BRI819P-B-D	Sharkward 120-277V 0-10V Microwave Motion Sensor
RC-100	Remote Control 100
C-EM-R-BZ	Remote Emergency Batter Back-Up Kit for Canopy 8W Bronze

* Please contact LITELUME for all Custom Option Requests

Buy American Act Compliant Ordering Information

Part #	Description
BAA-SCLP	Buy American Act Compliant for Square Canopy Low Profile

* Please contact LITELUME for all Custom Option Requests