



Jelly Jar Elite



Description

The LITELUME™ Jelly Jar Elite (LL-JJE) is an aesthetically pleasing specification grade wall mount fixture designed for new construction or retrofit to replace older style jelly jars, porch style and wall mounted luminaires. Featuring a die-cast aluminum housing with a frosted impact resistant PC lens for long-lasting durability. Available in 3 styles, dome, cylinder or flat lens. Selectable color temperature and selectable power.

Applications: Office buildings, condos, apartments, town homes, storage facilities, general homes and a broad spectrum of overall multi-family, service, residential and industrial applications.

Fixture Information

Size:	10W/15W/20W
Housing:	Die-cast Aluminum
Finish:	Protective powdercoat
Color:	Standard: Bronze (BZ)
Mounting:	Standard: Wall mount
Lens:	Impact resistant polycarbonate
Power Factor:	.90
CRI:	80
THD:	<20%
Operating Temperature:	-40°F to 113°F
Voltage:	Standard: 120-277V
Dimming:	Standard: 0-10V
Sensor:	Standard: Photocell
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1,350 to 2,800 lm

Lumens Per Watt (typical):

135-140 lm/W

CCT:

3000K

4000K

5000K

Lifespan:

70,000 Hours based on IES LM80 results & TM21 calculations

Ratings & Certificates


UL Listed For Wet Location






Dimension

Item	Width	Length	Height
LL-DL	5.2"	7.3"	5.9"
LL-CL	5.2"	7.3"	5.9"
LL-FL	5.2"	7.3"	5.9"

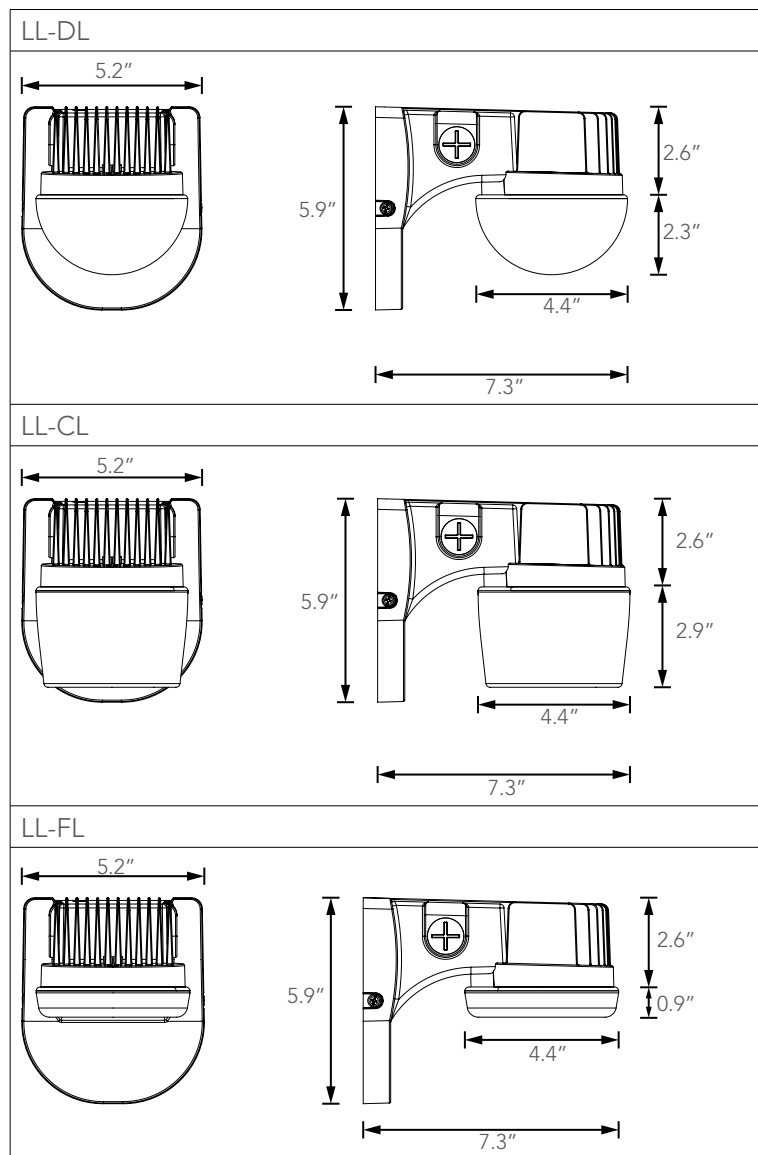



Features:

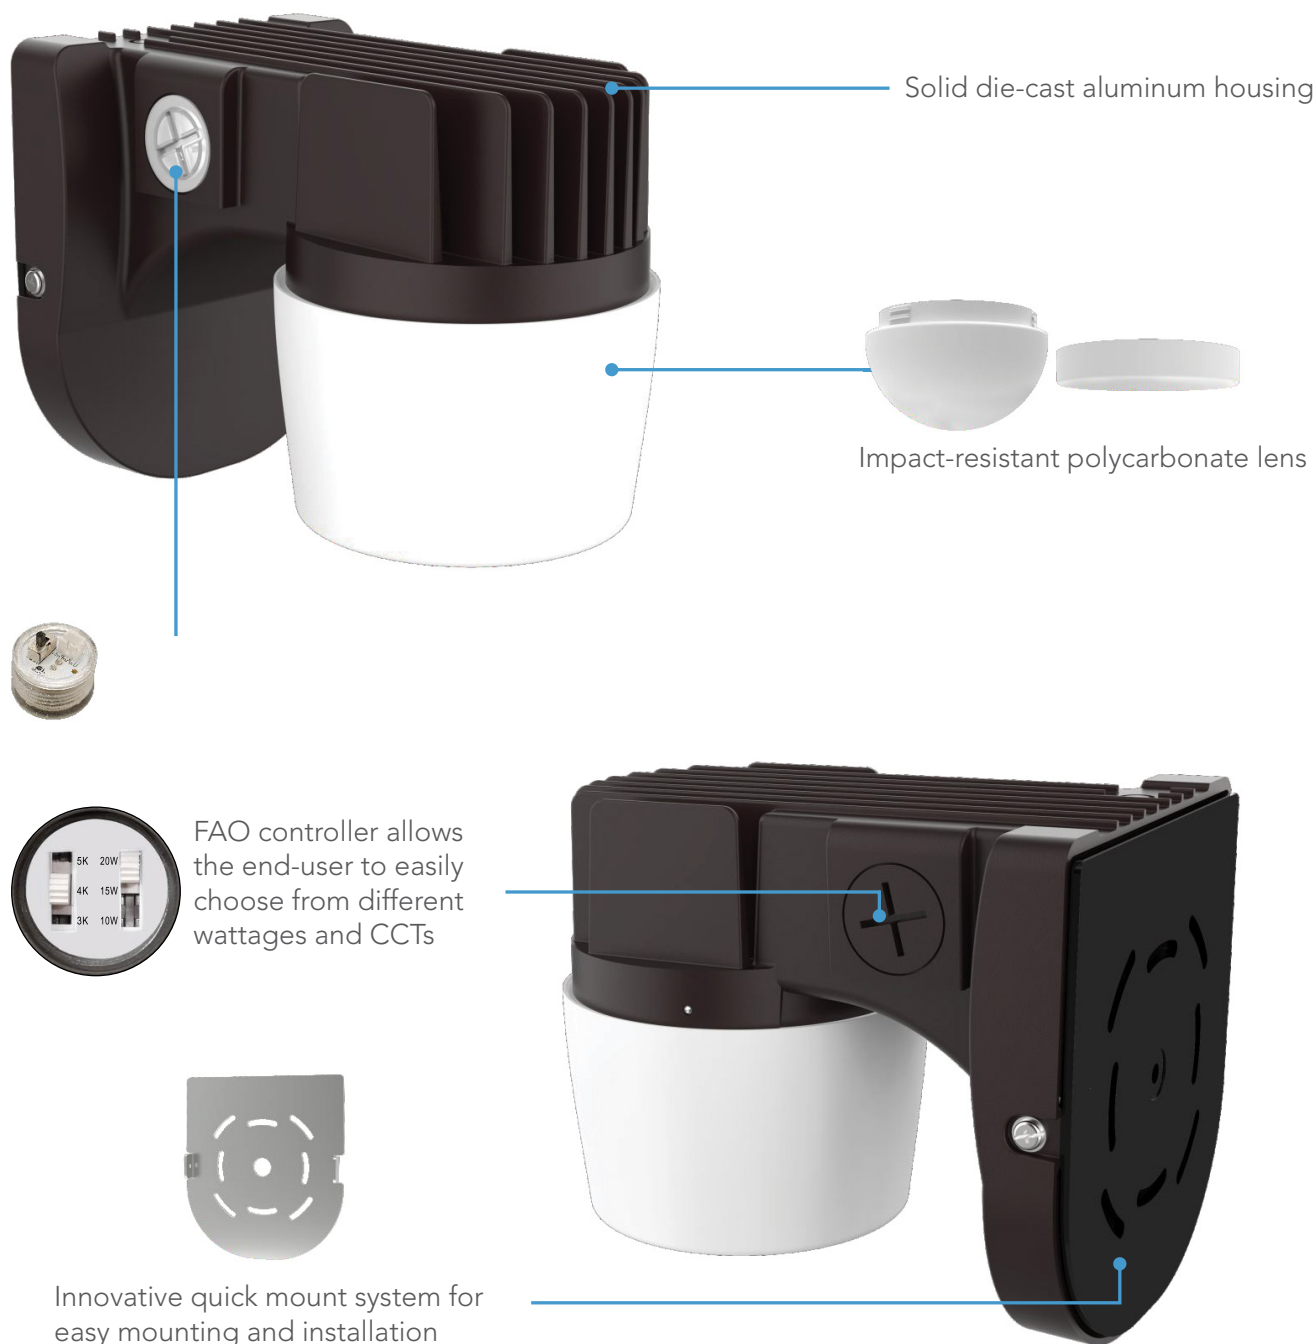



Operating Temperature



20/15/10W



5000K/4000K/3000K



20W



15W



10W



5000K



4000K



3000K





Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Ordering Guide

Brand		Fixture Type		Lumen Package		Lumen Package		Voltage		CCT		Power	
LL	LITELUME	JJE	Jelly Jar Elite	DL	Dome Lens	3L	2800 Lumens	UNV	120-277V	SCT	Selectable color temperature *	SP	Selectable Power
				CL	Cylinder Lens								
				FL	Flat Lens								

Finish		Photocell	
BZ	Bronze	PC	Photocell

* SCT Selectable color temperature 3000K/4000K/5000K

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Distribution
LL-JJE-DL-3L-UNV-SCT-SP-BZ-PC	10W/15W/20W	1400/2100/2800	3000K 4000K 5000K	120-277	General
LL-JJE-CL-3L-UNV-SCT-SP-BZ-PC	10W/15W/20W	1370/2055/2740	3000K 4000K 5000K	120-277	General
LL-JJE-FL-3L-UNV-SCT-SP-BZ-PC	10W/15W/20W	1350/2025/2700	3000K 4000K 5000K	120-277	General

* Please contact LITELUME for all Custom Option Requests