



Description

The LITELUME™ Crosspack (LL-CP) features a die-formed cold rolled steel housing with a high transmission UV-resistant acrylic lens for excellent uniformity. The 3 different size housings allows for multiple different architectural options.

Applications: Security, Pathway, Perimeter, Hallway and Walkway lighting.

Fixture Information

Size:	15W/23W/34W
Housing:	Die-formed cold rolled steel
Finish:	Protective powdercoat
Color:	Standard: Black (BK)
Mounting:	Standard: Wall Mount
Lens:	Acrylic
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

665 to 2200 lm

Lumens Per Watt (typical):

44 to 65 lm/W

CCT:

3000K
4000K

Lifespan:

50,000 running hours

Ratings & Certificates

ETL/cETL Listed
UL Wet Location Listed




Intertek



Dimension

Item	Depth	Width	Height
15W	3.8"	8.3"	13.3"
23W	3.8"	8.3"	21.7"
34W	3.8"	8.3"	30"

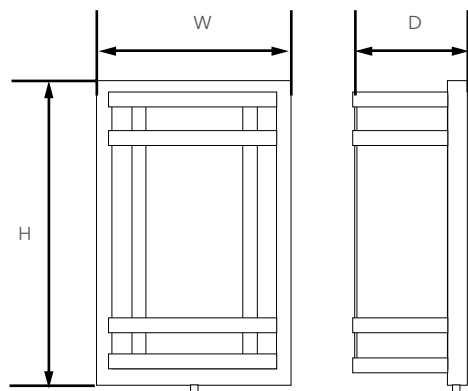



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage
LL-CP-15-40-UNV-BK	15	725	4000	120-277
LL-CP-15-30-UNV-BK	15	665	3000	120-277
LL-CP-23-40-UNV-BK	23	1350	4000	120-277
LL-CP-23-30-UNV-BK	23	1290	3000	120-277
LL-CP-34-40-UNV-BK	34	2200	4000	120-277
LL-CP-34-30-UNV-BK	34	2110	3000	120-277

* Please contact LITELUME for all Custom Option Requests

Accessories Ordering Information

Part #	Description
PC	Photocell
EM	Emergency Battery Back Up