



# Imperious Decorative Pendant - Made in USA - Delaware

## LL-DE-IMP

### Imperious Decorative Pendant

The LITELUME™ Imperious 1 & 2 (LL-DE-IMP1 & LL-DE-IMP2) is a high performance premium specification grade LED decorative pendant fixture built with cast & spun aluminum made in the USA with the highest quality standards.



#### PERFORMANCE DATA

Lumen Output	1203 - 21600 lm
Lumens Per Watt (typical)	120 - 140 lm/W
CCT	3000K 4000K 5000K 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
Lifespan	100,000 hrs

#### RATINGS & CERTIFICATES

ETL Listed to UL 1598 Standard  
Wet location • IP66

#### APPLICATIONS

Municipality • Pathway • Perimeter  
Pedestrian • Walkway

#### FIXTURE INFORMATION

Size	Housing	Finish	Mounting	Color	
10W - 155W	Cast Aluminum Upper Dome Spun Aluminum Lower Shade	Durable Polyester Powder Coat Finish Over a Chromate Conversion Coating. Custom Finishes Available, Including Patinas and All RAL Colors.	Pendant	Black Powder Coat (BK) White Powder Coat (WH) Dark Bronze Powder Coat (DBZ) Dark Green Powder Coat (DGR) Gray Powder Coat (GY) Custom (CUS)	
Voltage	Dimming	Electrical	Power Factor	CRI	Warranty
120 - 277V 480V	0-10V	Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)	.90	70	10 Year Limited



# Imperious Decorative Pendant - Made in USA - Delaware



## PERFORMANCE DATA SPECIFICATIONS

### Lumen Output for Imperious 1 & 2

Wattage (Lumen Package)	10W (1L)	15W (2L)	20W (3L)	30W (4L)	40W (5L)	50W (7L)	60W (8L)	70W (9L)	80W (11L)	90W (12L)	105W (14L)	120W (16L)	135W (18L)	155W (21L)	
Size (Dia.)	6"	6"	6"	6"	6"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
1 = Type I Clear PC Lens	3K	NOT AVAILABLE						8,830	10,091	11,353	13,239	15,137	17,029	19,552	
	4K	NOT AVAILABLE						9,013	10,301	11,588	13,519	15,451	17,382	19,957	
	5K	NOT AVAILABLE						9,150	10,457	11,765	13,725	15,686	17,647	20,261	
	BUG Rating	NOT AVAILABLE						B3-U3-G2	B3-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	
2 = Type II Clear PC Lens	3K	1,454	1,907	2,543	3,815	5,086	6,357	7,629	8,900	10,171	11,443	13,344	15,257	17,164	19,707
	4K	1,483	1,947	2,596	3,894	5,191	6,489	7,787	9,085	10,382	11,680	13,627	15,573	17,520	20,115
	5K	1,506	1,976	2,635	3,953	5,270	6,588	7,905	9,223	10,540	11,858	13,834	15,811	17,787	20,422
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
3 = Type III Clear PC Lens	3K	1,451	1,904	2,539	3,808	5,077	6,346	7,617	8,886	10,155	11,424	13,322	15,232	17,136	19,675
	4K	1,481	1,944	2,592	3,887	5,183	6,478	7,774	9,070	10,365	11,661	13,604	15,548	17,491	20,082
	5K	1,504	1,973	2,631	3,946	5,262	6,577	7,892	9,208	10,523	11,838	13,812	15,785	17,758	20,388
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
4 = Type IV Clear PC Lens	3K	1,419	1,861	2,483	3,724	4,965	6,206	7,448	8,689	9,930	11,171	13,027	14,895	16,756	19,239
	4K	1,448	1,901	2,534	3,801	5,068	6,335	7,602	8,869	10,136	11,402	13,303	15,204	17,104	19,638
	5K	1,470	1,929	2,573	3,859	5,145	6,431	7,718	9,004	10,290	11,576	13,506	15,435	17,365	19,937
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B2-U3-G3	B2-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G4

Please refer to the fixture's IES file for detailed information. Subject to change.

Continued on Next Page



# Imperious Decorative Pendant - Made in USA - Delaware

## PERFORMANCE DATA SPECIFICATIONS

### Lumen Output for Imperious 1 & 2

Wattage (Lumen Package)	10W (1L)	15W (2L)	20W (3L)	30W (4L)	40W (5L)	50W (7L)	60W (8L)	70W (9L)	80W (11L)	90W (12L)	105W (14L)	120W (16L)	135W (18L)	155W (21L)	
Size (Dia.)	6"	6"	6"	6"	6"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
F = Type V Clear PC Lens	3K	1,485	1,948	2,598	3,897	5,195	6,494	7,793	9,092	10,390	11,689	13,631	15,585	17,533	20,131
	4K	1,515	1,989	2,652	3,977	5,303	6,628	7,955	9,280	10,606	11,931	13,920	15,908	17,897	20,548
	5K	1,539	2,019	2,692	4,038	5,384	6,729	8,075	9,421	10,767	12,113	14,132	16,151	18,170	20,861
	BUG Rating	B1-U2-G1	B2-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G2	B3-U3-G2	B3-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G3	B4-U3-G3	B5-U3-G3

Please refer to the fixture's IES file for detailed information. Subject to change.

## STYLES


IMP1 - Short Globe, No Skirt	IMP1 - Deep Globe, No Skirt	IMP1 - Short Globe with Skirt	IMP1 - Deep Globe with Skirt
			
IMP2 - Short Globe, No Skirt	IMP2 - Deep Globe, No Skirt	IMP2 - Short Globe with Skirt	IMP2 - Deep Globe with Skirt
			




# Imperious Decorative Pendant - Made in USA - Delaware

## IMP1 DIMENSIONS


IMP1 - Short Globe, No Skirt

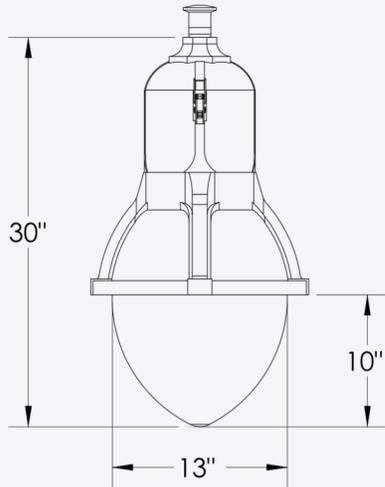


IMP1 - Deep Globe, No Skirt

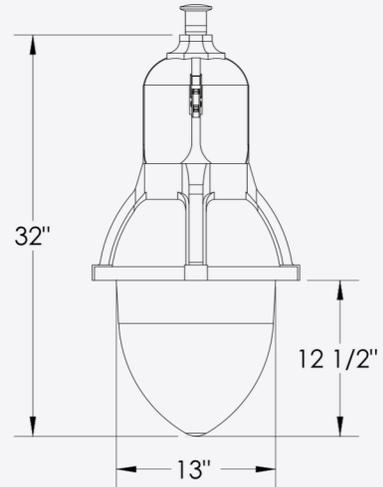

IMP1 - Short Globe with Skirt

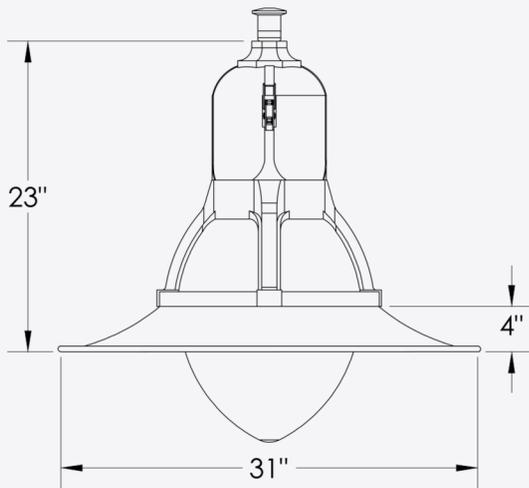

IMP1 - Deep Globe with Skirt

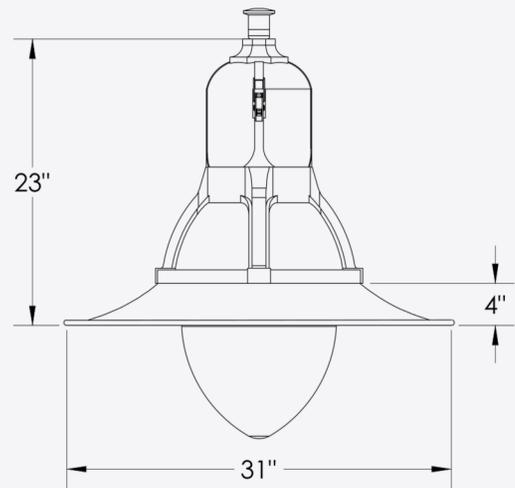





# Imperious Decorative Pendant - Made in USA - Delaware

## IMP2 DIMENSIONS


IMP2 - Short Globe, No Skirt

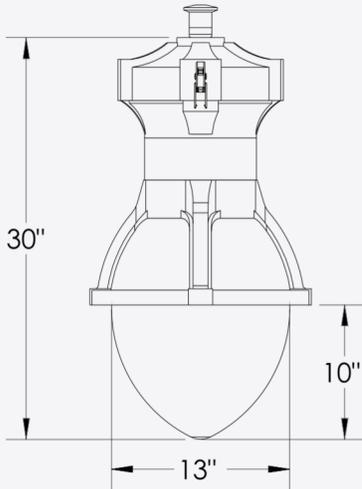


IMP2 - Deep Globe, No Skirt

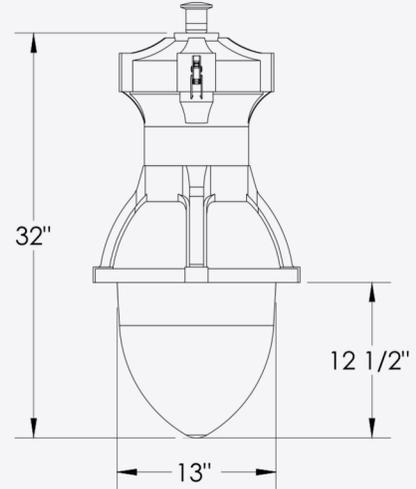

IMP2 - Short Globe with Skirt

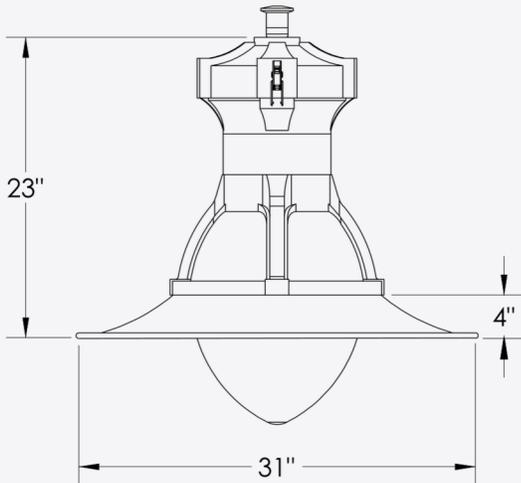

IMP2 - Deep Globe with Skirt

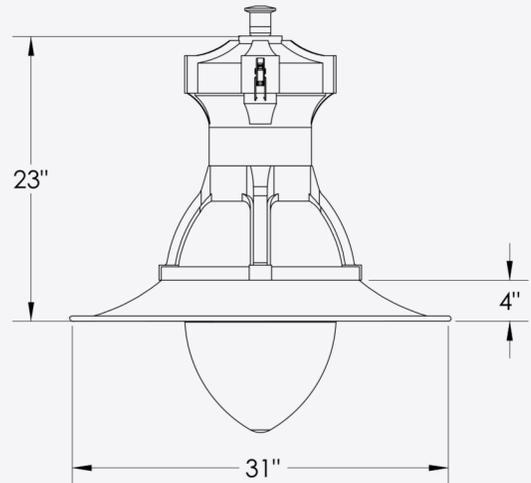



# Imperious Decorative Pendant - Made in USA - Delaware

PROJECT NAME	
CATALOG #	
JOB TYPE	
PREPARED BY	
NOTES	

## ORDERING GUIDE

Brand	Location	Fixture Type		Spinning	
LL LITELUME	DE Delaware	IMP1 Imperious Pendant 1	IMP2 Imperious Pendant 2	BLANK None	SKT Spun Short Skirt
Shades		Lumen Package		CCT	Voltage
<b>ADG</b> Clear Acrylic Deep Globe <b>ASG</b> Clear Acrylic Short Globe <b>PDG</b> Polycarbonate Deep Globe <b>PSG</b> Polycarbonate Short Globe <b>D5</b> Narrow Tapered <b>DPG</b> Deep Borosilicate Glass *  * Up to 11L only		<b>1L</b> 1000 Lumens <b>2L</b> 2000 Lumens <b>3L</b> 3000 Lumens <b>4L</b> 4000 Lumens <b>5L</b> 5000 Lumens <b>7L</b> 7000 Lumens <b>8L</b> 8000 Lumens	<b>9L</b> 9000 Lumens <b>11L</b> 11000 Lumens <b>12L</b> 12000 Lumens <b>14L</b> 14000 Lumens <b>16L</b> 16000 Lumens <b>18L</b> 18000 Lumens <b>21L</b> 21000 Lumens	<b>30</b> 3000K <b>40</b> 4000K <b>50</b> 5000K	<b>UNV</b> 120-277V <b>480</b> 480V
Distribution	Mounting		Options	Finish	
<b>T1</b> Type 1 ** <b>T2</b> Type 2 <b>T3</b> Type 3 <b>T4</b> Type 4 <b>T5</b> Type 5  ** 9L and Above Only	<b>PEN</b> 2.5" Round Plumbizer Pendant Mount		<b>BLANK</b> None <b>PC</b> Button Photocell	<b>BK</b> Black Powder Coat <b>WH</b> White Powder Coat <b>DBZ</b> Dark Bronze Powder Coat <b>DGR</b> Dark Green Powder Coat <b>GY</b> Gray Powder Coat <b>CUS</b> Custom *	