



Description

New York Compliant Recessed Edgelit Aluminum Exit Signs

Illumination:

- Ultra bright, energy efficient, long life Red LEDs.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City compliant 8" EXIT letters.

Electrical:

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting:

- Compatible with drywall or drop-thru ceiling mount installations. Bar hangers included.
- Wall mount capability optional.

Housing:

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable, providing accessibility for service or maintenance. Available in optional black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.

Options:


- WM: Allows for the unit to be wall recessed mounted.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- SPV: UL Listed for 208/220/240 Volt, 50/60Hz.

Warranty/Listing:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



Dimensions:

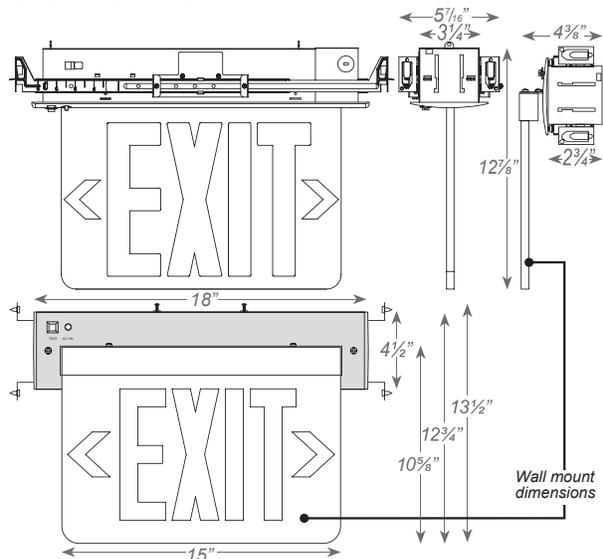



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	No. of Faces		Letter		Panel		Trim Plate		Battery		Options	
LL-NYRELZXTE	1	Single Face	R	Red	C	Clear ¹	W	White	(blank) EM	AC-Only Battery Backup	WM SDT SPV	Wall Mount ¹ Self-Diagnostics ² 208/220/240 Volt, 50/60Hz ³
	2	Double Face			M	Mirror	B	Black				
					W	White						

¹ With single face only.

² Available only with EM units.

³ Not available with SDT.