



LL-CAR



Description

Chicago Approved Steel Recessed Emergency Unit

Illumination:

- Two, 6V/12V 12W adjustable bi-pin halogen lamp heads.

Electrical:

- Dual 120/277 voltage standard
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 26W standard on 50W models.

Mounting:

- Conveniently designed for use with T-bar grid ceilings.
- Holes provided on enclosure for wire-suspension mount.

Housing:

- Durable 20-gauge steel construction.
- White or black finish.


Warranty/Listing:

- Seven year warranty on all electronics and housing. Battery prorated for two years.
- UL Listed for damp locations (20°C – 50°C standard).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Meets city of Chicago requirements.



Dimensions:

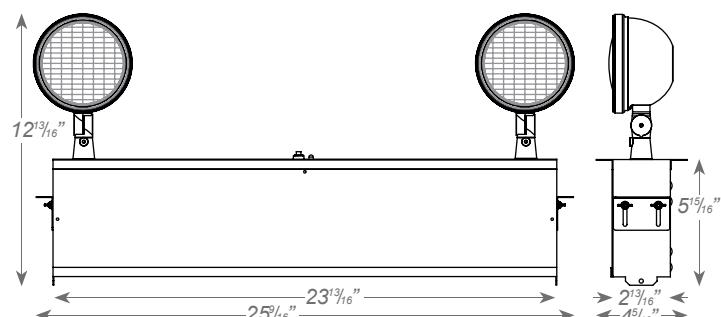



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Model	Voltage	Watts (for 120mins)	Housing Color
LL-CAR	6 12	6V 12V	27 50

¹Available in 6V only.