



Ceiling Now



Standard Model



Emergency Battery Back Up
High Frequency Sensor Bi-Level
Emergency Battery Back Up / High Frequency Sensor Bi-Level

Description

The LITELUME™ Ceiling Now (LL-CN) luminaire incorporates built-in emergency lighting, sensed bi-level lighting or both in this multi-functional design. Features a die-formed cold rolled steel housing in satin nickel or oil rubbed bronze with a high transmission acrylic lens for a soft appearance. Offering 4 different sizes and wattages. Available in 3000k, high power factor and low THD.

Applications: commercial, residential, hospitality and entertainment.

Fixture Information

Size:	18W/23W/28W/35W
Housing:	Die-formed cold rolled steel
Finish:	Protective powder coat
Color:	Standard: Satin Nickel (SN) Standard: Oil Rubbed Bronze (ORB)
Mounting:	Standard: Ceiling Mount
Lens:	High Transmission Acrylic
CRI:	80
Power Factor:	.90
Voltage:	Standard: 120V, 120-277V
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

1430 to 3364 lm

Lumens Per Watt (typical):

72 to 98 lm/W

CCT:

3000K

Ratings & Certificates

ETL/cETL Listed
Damp Location Listed





Dimension

(Emergency Battery Back Up)

(High Frequency Sensor Bi-Level)


(Emergency Battery Back Up / High Frequency Sensor Bi-Level)

Item	Diameter (a)	Height (b)
18W	11.8"	5.0"
23W	14.6"	5.7"
28W	16.0"	5.9"
35W	17.7"	5.9"

Dimension

(Standard Model)

Item	Diameter (a)	Height (b)
18W	11.8"	4.2"
23W	14.6"	4.6"
28W	16.0"	4.9"
35W	17.7"	4.9"

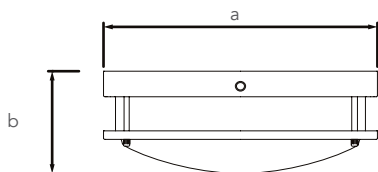



Project Name	
Catalog #	
Job Type	
Prepared By	
Notes	

Fixture Ordering Information

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze

Emergency Battery Back Up

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-EM4-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM4-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM8-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM8-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM8-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-EM8-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-EM8-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-EM8-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-EM8-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-EM8-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze

High Frequency Sensor Bi-Level

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-BI-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-BI-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-BI-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-BI-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-BI-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-BI-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-BI-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-BI-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze



Emergency Battery Back Up / High Frequency Sensor Bi-Level

Part #	Wattage	Lumens	Kelvin	Voltage	Color
LL-CN-EM-BI-18-30-120-SN	18	1430	3000	120	Satin Nickel
LL-CN-EM-BI-18-30-120-ORB	18	1430	3000	120	Oil Rubbed Bronze
LL-CN-EM-BI-23-30-UNV-SN	23	2267	3000	120-277	Satin Nickel
LL-CN-EM-BI-23-30-UNV-ORB	23	2267	3000	120-277	Oil Rubbed Bronze
LL-CN-EM-BI-28-30-UNV-SN	28	2600	3000	120-277	Satin Nickel
LL-CN-EM-BI-28-30-UNV-ORB	28	2600	3000	120-277	Oil Rubbed Bronze
LL-CN-EM-BI-35-30-UNV-SN	35	3364	3000	120-277	Satin Nickel
LL-CN-EM-BI-35-30-UNV-ORB	35	3364	3000	120-277	Oil Rubbed Bronze